

(1.27 mm) .050"

YFS SERIES

LOW-PROFILE OPEN-PIN-FIELD SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see
www.samtec.com?YFS

Insulator Material:
Black Liquid Crystal Polymer

Black Liquid Crystalline Contact Material

Phosphor Bronze

Plating

Au over 50 μ " (1.27 μ m) N

Operating Temp
-55 °C to +125 °C

-55 °C to +125 °C

Working Voltage: 275 VAC when ma

275 VAC which rated
with YFT

Mated Cycles:

200 with YFT

RoHS Compliant No.



RECOGNITIONS

For complete scope of
recognition see
www.samtec.com/quality



ALSO AVAILABLE
(MOQ Required)

- 30, 40 & 50 positions in 5 & 8 rows
 - 3 & 6 rows

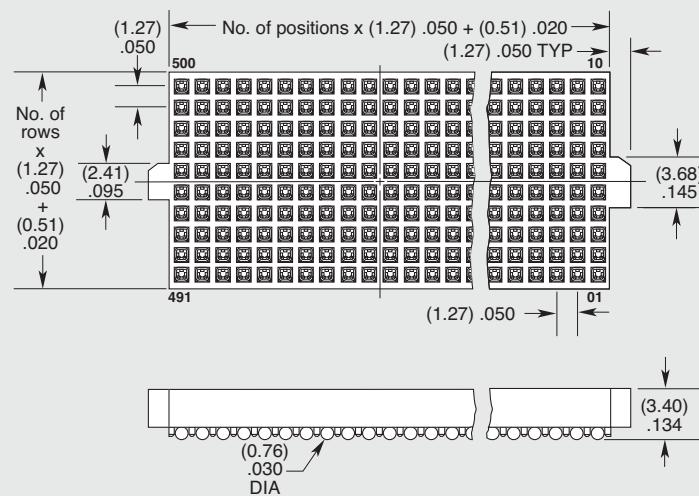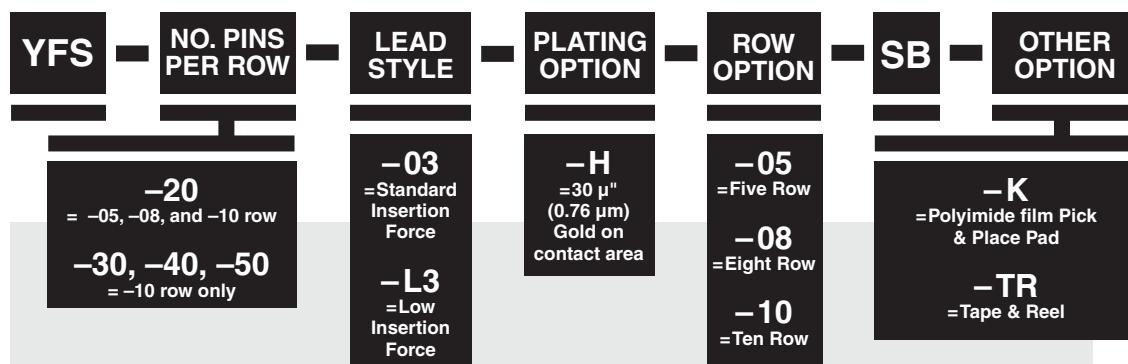

Note:
Some sizes, styles and
options are non-standard.
non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec](#):

[YFS-20-03-H-08-SB-K](#)