



COAXIAL TERMINAISON TNC MALE

6 GHZ 100W

R404.772.000

Series : TERMINATION

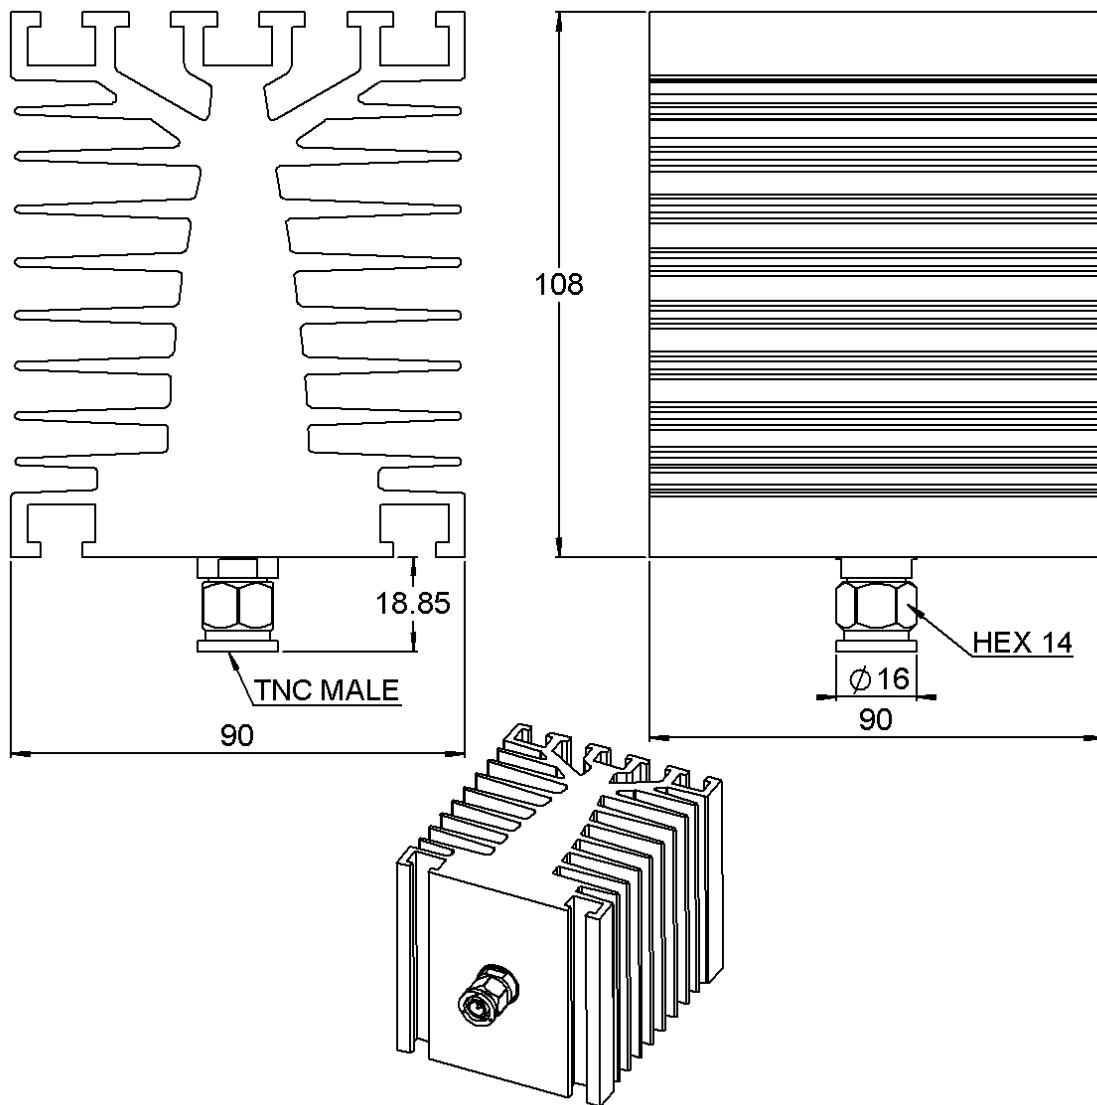

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING(μm)
BODY	ACIER INOXYDABLE	PASSIVATION
CENTER CONTACT	CUPRO BERYLLIUM	OR 0.5 SUR NICKEL PHOSPHORE 2
OUTER CONTACT		
INSULATOR	PTFE	
GASKET	ELASTOMERE SILICONE	
SUBSTRATE	NITRURE ALUMINIUM	
RESISTOR	Couche epaisse	
OTHERS PARTS	ALUMINIUM	ANODISATION NOIRE

Issue : 1341 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL

COAXIAL TERMINAISON TNC MALE**6 GHZ 100W****R404.772.000**Series : **TERMINATION****ELECTRICAL CHARACTERISTICS**

Frequency (GHz)	DC - 3	3 - 6
V.S.W.R (\leq)	1.20	1.30


Operating Frequency Range	DC - 6	GHz
Impedance	50	Ω
DC Resistance	50	$\Omega \pm 5\%$
Peak power at 25°C (1μs, 1%)	2000	W
Average power at 25°C	100	W (Free Air Cooled)
		W (Conduction Cooled)

MECHANICAL CHARACTERISTICS

Connectors	TNC	Male	MIL C39012
Weight	1 215,0000 g		

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range	-55/+125 °C
Storage temperature range	-55/+125 °C

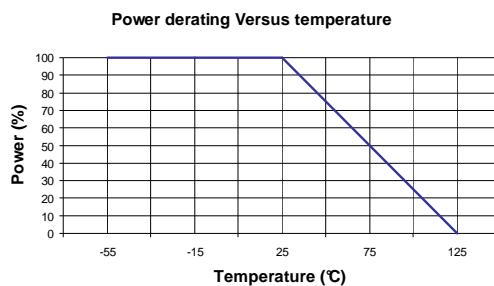**SPECIFICATION****OTHER CHARACTERISTICS**

MOUNTED WITH VERTICAL COOLING FINS AND NATURAL CONVECTION

Issue : 1341 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


RADIALL

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Radiall](#):

[R404772000](#)