


Model MDP-X Double Banana Plug, Four Terminal Isolation

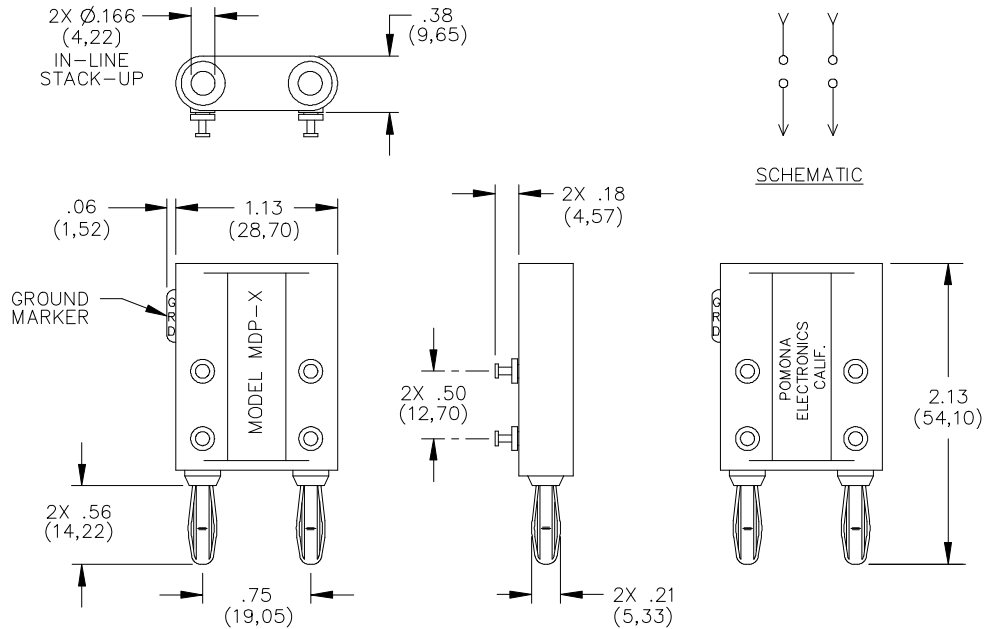

FEATURES:

- Mates to Model #2269 or any standard double banana jack..
- Provides four terminal isolation.
- Top stack-up receptacles isolated from lower plugs.
- Ideal for insertion of matching network in laboratory VTM's signal generators, etc.
- Bright tin plated solder turret terminals for permanent noise-free connections.

MATERIALS:

Upper Conn.:

Double Banana Jack

Material: Brass per QQ-B-626, Alloy 360,
½ Hard.

Finish: Nickel plated by QQ-N-290, Class 2,
200/300 microinches.

Insulation: Polypropylene molded to plug bodies.

Color: Red.

Marking: "POMONA ELECTRONICS CALIF.
MODEL MDP-X".

Lower Conn.:

Double Banana Plug

Material: Spring – Beryllium Copper per QQ-
C-533, Alloy 172, Cond. HT.

Plug body – Brass per QQ-B-626, Alloy 360, ½
Hard.

Finish: Nickel plated per QQ-N-290, Class 2,
200/300 microinches.

Solder turret terminals

Material: Brass per QQ-B-626, Alloy 360, ½
Hard.

Finish: Bright tin plated per MIL-T-10727,
Type I, 100/250 microinches.

RATINGS:

Operating Temperature: +55°C. (+131°F.) MAX.

Operating Voltage: 2500 V

Current: 15 Amperes

ORDERING INFORMATION: Model MDP-X

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pomona:](#)

[MDP-X](#)