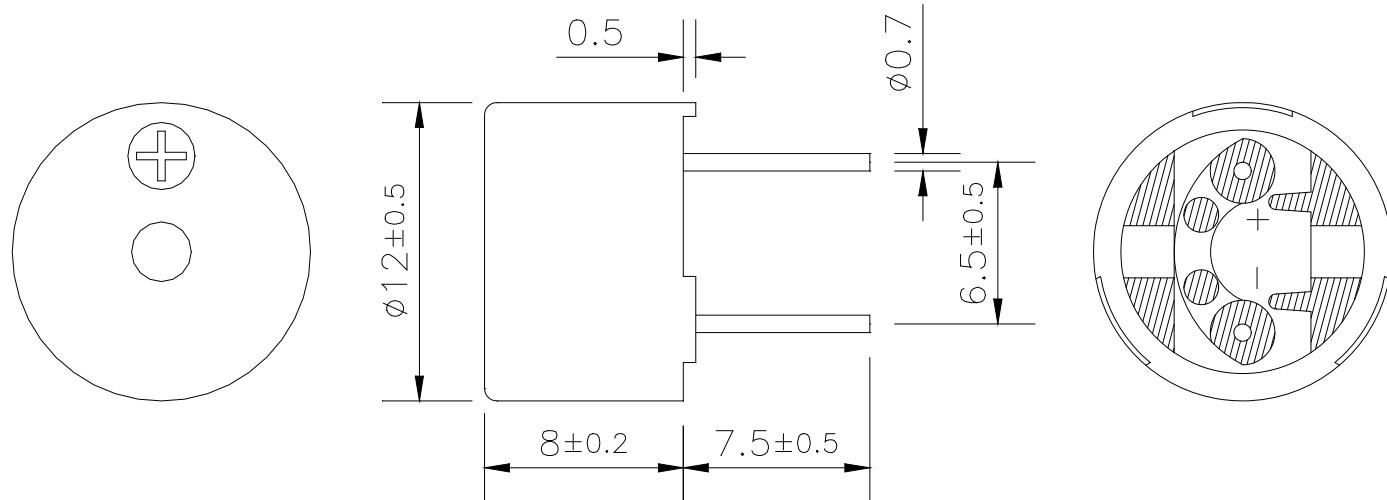


MALLORY**Mallory Sonalert Products Inc.**Part # **PB-1220P-05Q****Sales Outline Drawing**Revision **B****Specifications:**

Oscillation Frequency (Hz)	2048
Operating Voltage (Vp-p)	4.5 ~ 5.5
Rated Voltage (Vp-p)	5
Current Consumption Max. (mA)	45 at Rated Voltage
Sound Pressure Level Min. (dB)	85 at 10cm at Rated Voltage
Coil Resistance (Ω)	50 ± 5
Operating Temperature ($^{\circ}\text{C}$)	-20 ~ +70
Storage Temperature ($^{\circ}\text{C}$)	-30 ~ +80
Housing	PPO plastic resin (Color: Black)
Leading Pin	Tin Plated Brass
Condition by wave soldering ($^{\circ}\text{C}$)	260 ± 5 / within 5 sec
Condition by hand soldering ($^{\circ}\text{C}$)	350 ± 20 / within 5 sec
Weight (Grams)	1.3
Options	For other options contact factory

Dimensions: (units: mm)**ROHS Compliant**

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[PB-1220P-05Q](#)