
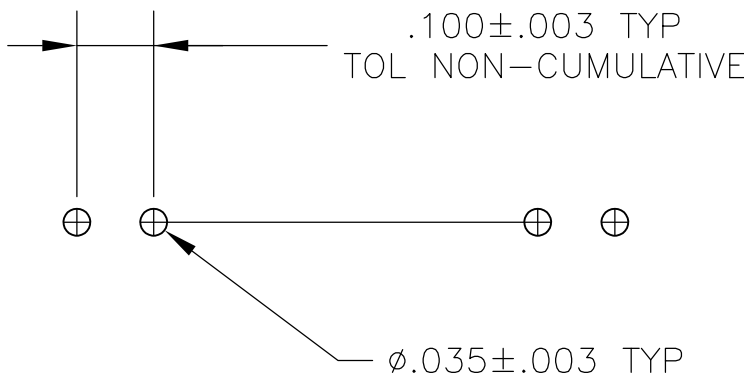


D

C

B

A

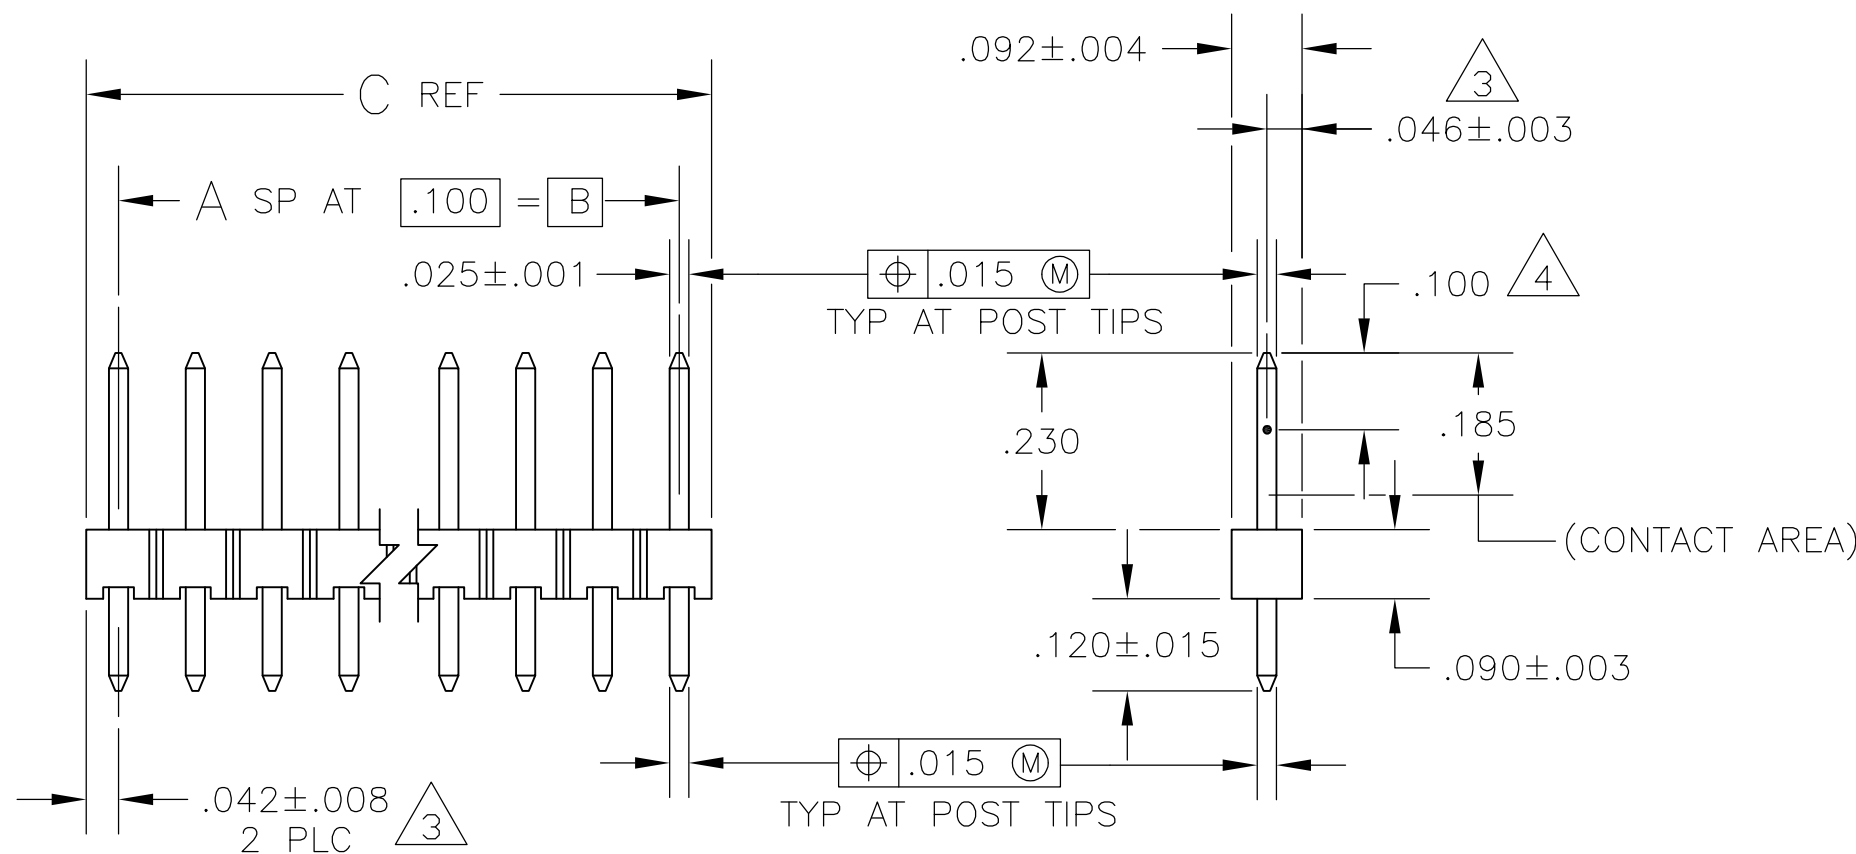

RECOMMENDED HOLE LAYOUT

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	3.984	3.900	39	40	4-103185-0
5	3.884	3.800	38	39	3-103185-9
OBSOLETE	3.784	3.700	37	38	3-103185-8
	3.684	3.600	36	37	3-103185-7
	3.584	3.500	35	36	3-103185-6
	3.484	3.400	34	35	3-103185-5
5	3.384	3.300	33	34	3-103185-4
OBSOLETE	3.284	3.200	32	33	3-103185-3
	3.184	3.100	31	32	3-103185-2
	3.084	3.000	30	31	3-103185-1
	2.984	2.900	29	30	3-103185-0
	2.884	2.800	28	29	2-103185-9
	2.784	2.700	27	28	2-103185-8
	2.684	2.600	26	27	2-103185-7
5	2.584	2.500	25	26	2-103185-6
OBSOLETE	2.484	2.400	24	25	2-103185-5
	2.384	2.300	23	24	2-103185-4
5	2.284	2.200	22	23	2-103185-3
OBSOLETE	2.184	2.100	21	22	2-103185-2
	2.084	2.000	20	21	2-103185-1
	1.984	1.900	19	20	2-103185-0
5	1.884	1.800	18	19	1-103185-9
OBSOLETE	1.784	1.700	17	18	1-103185-8
	1.684	1.600	16	17	1-103185-7
	1.584	1.500	15	16	1-103185-6
5	1.484	1.400	14	15	1-103185-5
SUPERCEDED BY 6-146280-5	1.384	1.300	13	14	1-103185-4
5	1.284	1.200	12	13	1-103185-3
OBSOLETE	1.184	1.100	11	12	1-103185-2
	1.084	1.000	10	11	1-103185-1
5	.984	.900	9	10	1-103185-0
SUPERCEDED BY 6-146280-0	.884	.800	8	9	103185-9
	.784	.700	7	8	103185-8
	.684	.600	6	7	103185-7
	.584	.500	5	6	103185-6
	.484	.400	4	5	103185-5
	.384	.300	3	4	103185-4
	.284	.200	2	3	103185-3
	.184	.100	1	2	103185-2
	.084	—	—	1	103185-1
	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
H. MOLL
13OCT87

CHK
T. CLARK
20OCT87

APVD
T. CLARK
20OCT87

TE Connectivity

DIMENSIONS:
INCHES

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± .005

4 PLC ± -

ANGLES ± -

TE CONNECTIVITY

NAME

SIZE
A1

CAGE CODE
00779

DRAWING NO.
103185

RESTRICTED TO

MATERIAL: HOUSING: FLAME RETARDANT (UL94V-0) POLYESTER; COLOR-BLACK; POSTS: COPPER ALLOY

FINISH: POSTS: .00015 GOLD ON CONTACT AREA; .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL; ALL OVER .000500 NICKEL

WEIGHT
—

CUSTOMER DRAWING

SCALE
4:1

SHEET
1 of 1

REV
H

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103185-7](#)