
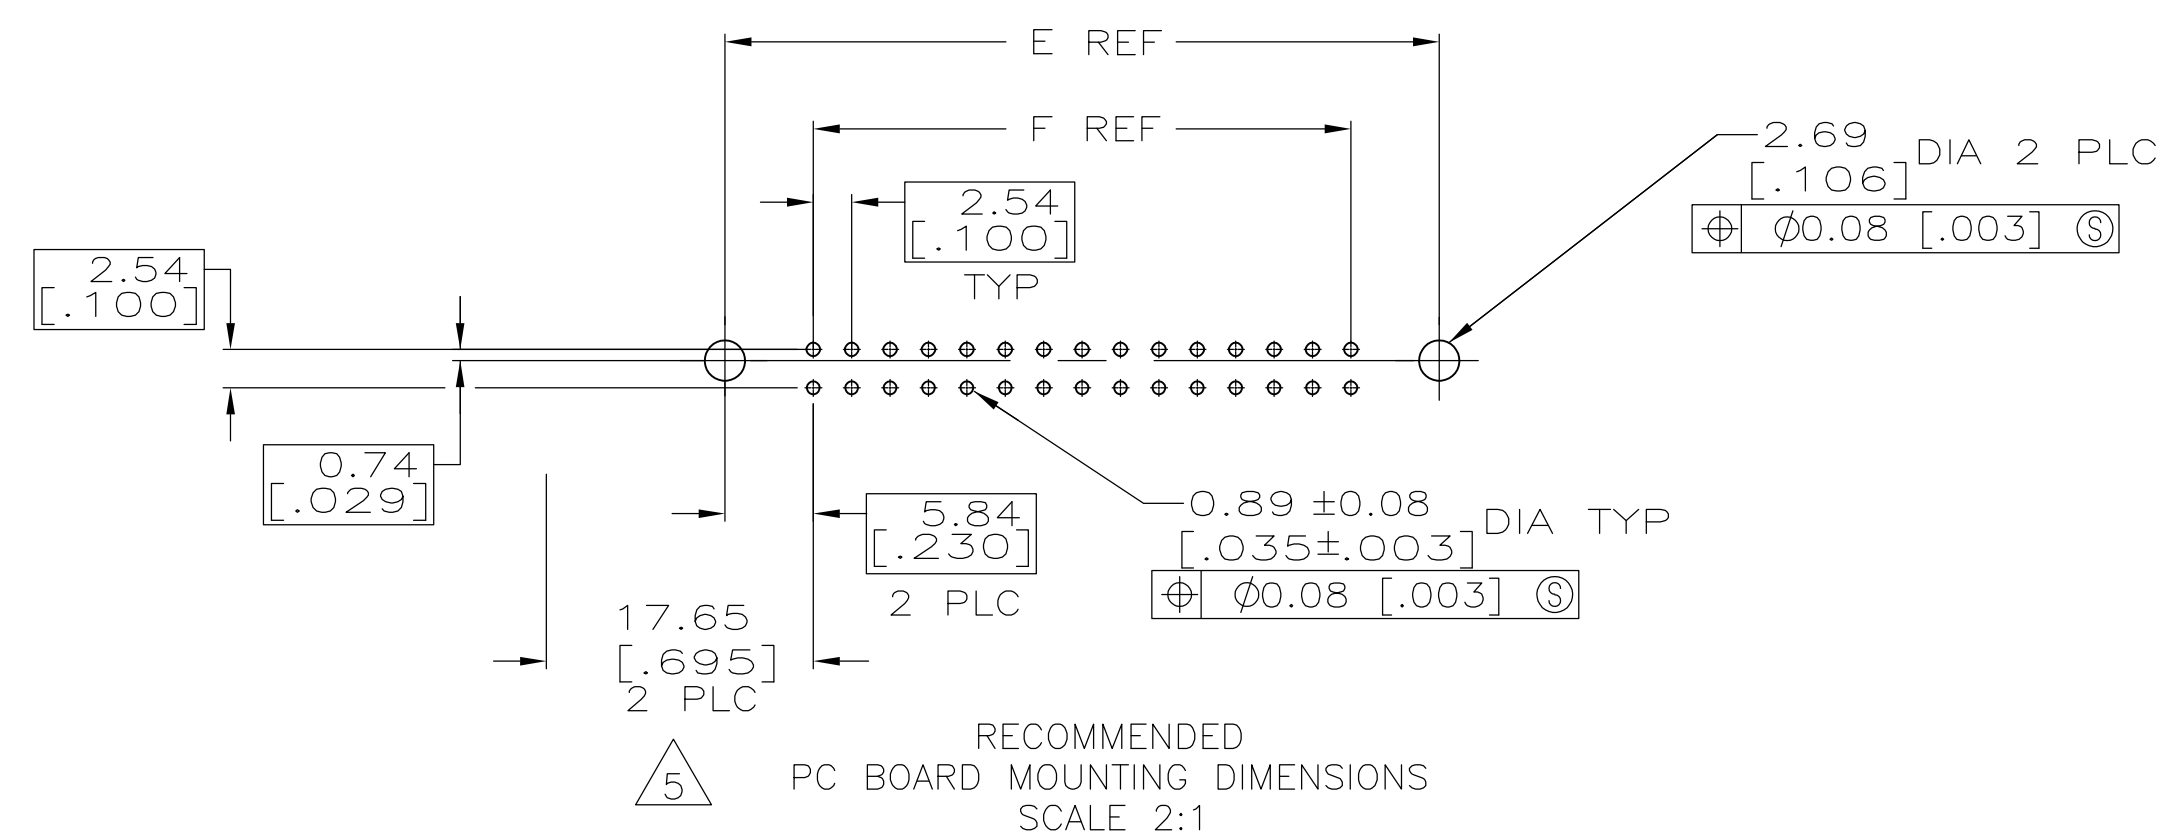


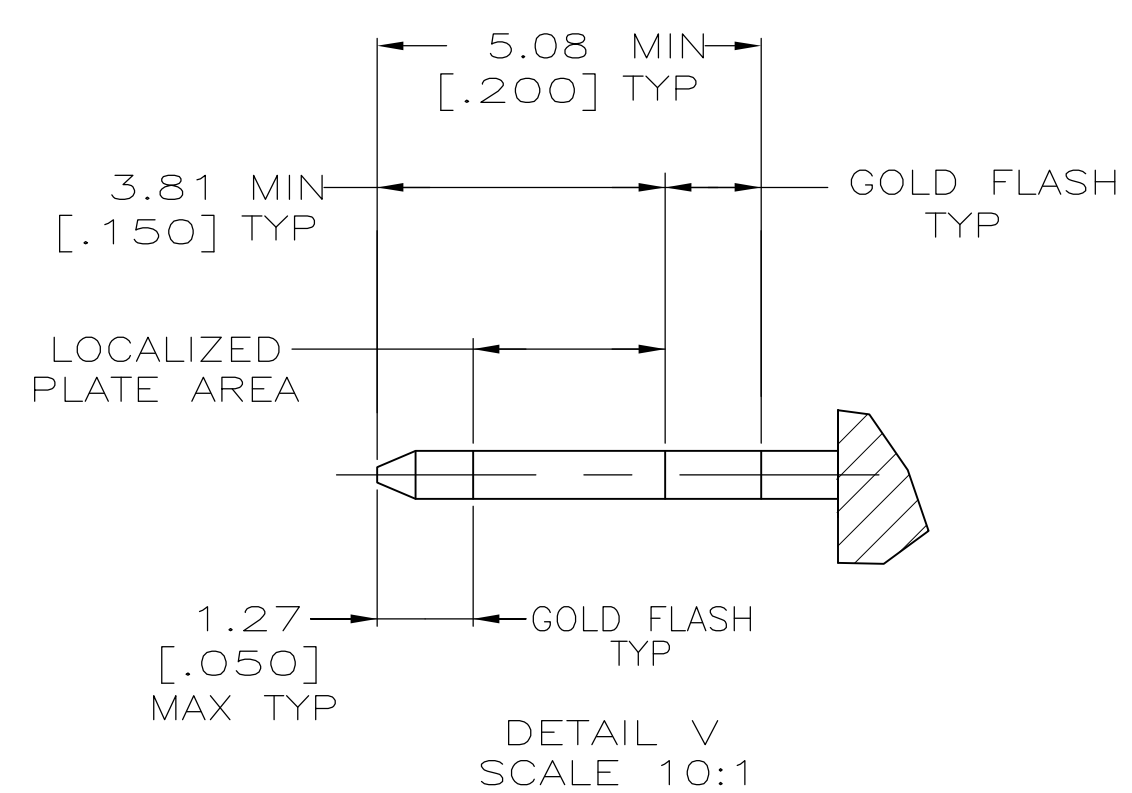

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

GP

00

LOC

DIST

REVISONS

GP

00

DATE

DWN

APVD

—

—

—

1

COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.

2

10 AND 14 POSITION SIZES CONTAIN ONLY ONE SLOT FOR SNAP-IN POLARIZER (MILITARY POLARIZATION) LOCATED AS SHOWN.

3

10 POSITION SIZES CONTAIN ONLY ONE SLOT FOR DUAL POLARIZATION, LOCATED AS SHOWN.

4

RECOMMENDED PRINTED CIRCUIT BOARD THICKNESS IS 3.18 [.125].

5

DISTANCE REQUIRED BY EJECTION LATCHES IN THE OPEN POSITION.

6

POSTS:
GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.38μm [.000015] MIN TOTAL ON THE LOCALIZED PLATE AREA,
2.54μm [.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAIL,
1.27μm [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
OR
0.38μm [.000015] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA,
2.54μm [.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAIL,
1.27μm [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.

7

MATERIAL:
HOUSING: GLASS FILLED NYLON OR POLYESTER, 94V-0 RATED, BLACK.
POSTS: BRASS.

OBSOLETE	—	—	53.34 [2.100]	65.02 [2.560]	65.02 [2.560]	75.18 [2.960]	71.12 [2.800]	60.96 [2.400]	44	1-499925-3
	1-102322-2		78.74 [3.100]	90.42 [3.560]	90.42 [3.560]	100.58 [3.960]	96.52 [3.800]	86.36 [3.400]	64	1-499925-2
OBSOLETE	—	—	73.66 [2.900]	85.34 [3.360]	85.34 [3.360]	95.50 [3.760]	91.44 [3.600]	81.28 [3.200]	60	1-499925-1
	—	—	60.96 [2.400]	72.64 [2.860]	72.64 [2.860]	82.80 [3.260]	78.74 [3.100]	68.58 [2.700]	50	1-499925-0
	102322-9		48.26 [1.900]	59.94 [2.360]	59.94 [2.360]	70.10 [2.760]	66.04 [2.600]	55.88 [2.200]	40	499925-9
	102322-8		40.64 [1.600]	52.32 [2.060]	52.32 [2.060]	62.48 [2.460]	58.42 [2.300]	48.26 [1.900]	34	499925-8
	102162-7	102320-1	35.56 [1.400]	47.24 [1.860]	47.24 [1.860]	57.40 [2.260]	53.34 [2.100]	43.18 [1.700]	30	499925-7
	102322-6		30.48 [1.200]	42.16 [1.660]	42.16 [1.660]	52.32 [2.060]	48.26 [1.900]	38.10 [1.500]	26	499925-6
	102162-5	102320-1	27.94 [1.100]	39.62 [1.560]	39.62 [1.560]	49.78 [1.960]	45.72 [1.800]	35.56 [1.400]	24	499925-5
	102322-4		22.86 [.900]	34.54 [1.360]	34.54 [1.360]	44.70 [1.760]	40.64 [1.600]	30.48 [1.200]	20	499925-4
	102162-3	102320-1	17.78 [.700]	29.46 [1.160]	29.46 [1.160]	39.62 [1.560]	35.56 [1.400]	25.40 [1.000]	16	499925-3
	102322-2		15.24 [.600]	26.92 [1.060]	26.92 [1.060]	37.08 [1.460]	33.02 [1.300]	22.86 [.900]	14	499925-2
	102322-1		10.16 [.400]	21.84 [.860]	21.84 [.860]	32.00 [1.260]	27.94 [1.100]	17.78 [.700]	10	499925-1
HEADER ASSY QTY:1	LATCH QTY:2		F	E	D	C	B	A	NO OF POSN	PART NUMBER
SUPERSEDED BY										

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC

± —
± —
± 0.13[.005]
± —
± —

ANGLES

FINISH

7

6

DWN
H. MOLL
4-23-90

CHK
R. STONE
11-28-90

APVD
—

Tyco
Electronics

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

PRODUCT SPEC
108-40018

APPLICATION SPEC
—

SIZE
—

CAGE CODE
—

DRAWING NO
A100779

RESTRICTED TO
—

WEIGHT
—

SCALE
4:1

SHEET
2

OF
2

REV
K

CUSTOMER DRAWING

499925

AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-499925-0](#)