

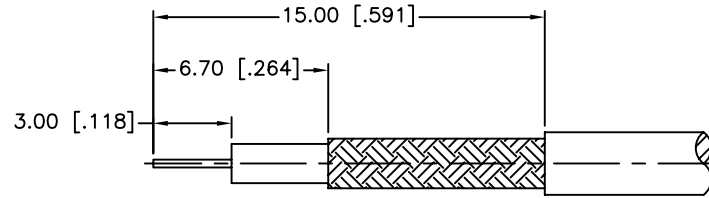
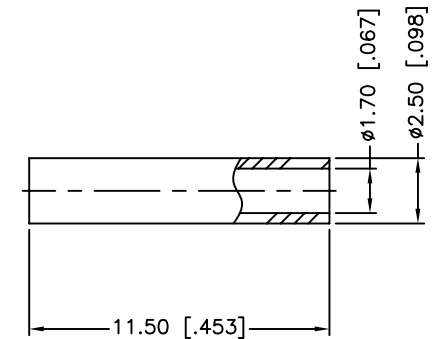
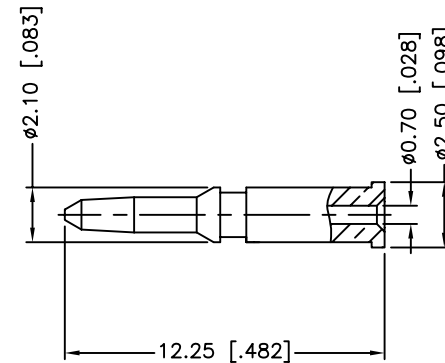


REV.	DATE	ECR NO.	DESCRIPTION
A	02/28/02	XXXXXX	MODIFY CONTACT PIN AND BODY LENGTH
B	04/04/03	XXXXXX	UPDATE DRAWING FORMAT
C	08/05/11	2210	CHANGE THE MATERIAL OF SHELL TO ZINC DIECAST

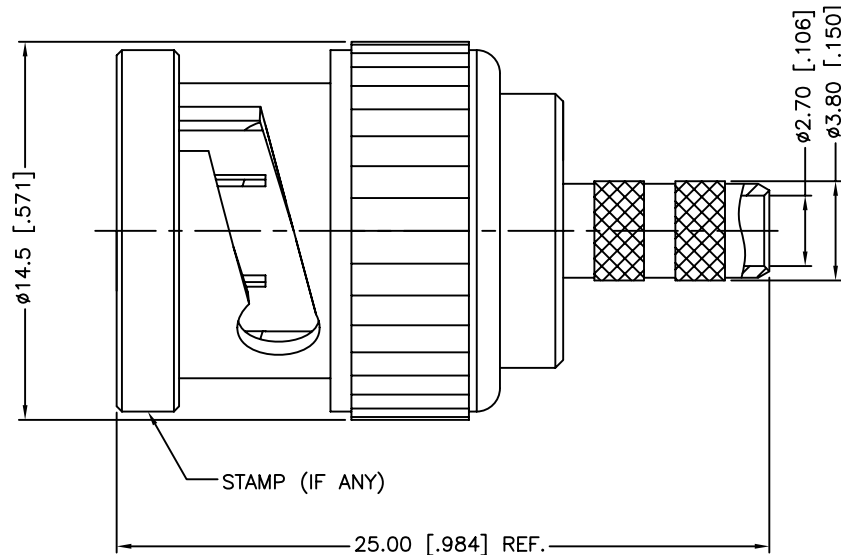

RECOMMENDED
CABLE STRIPPING DIM'S

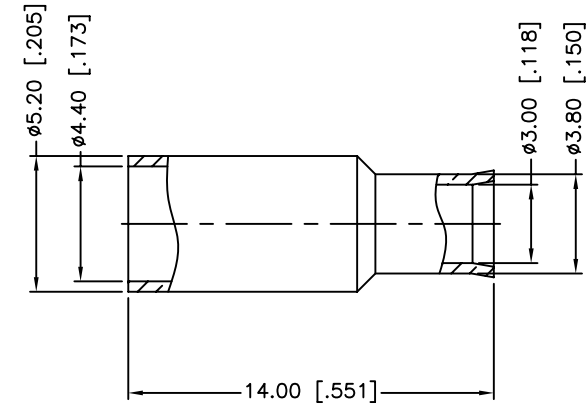

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex			
				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"		DRAWN M.ZHANG		11/21/06					
6	FERRULE	BRASS	NICKEL	1			CHECKED		PART DESCRIPTION BNC CRIMP PLUG – 50 Ohms (FOR RG-174/U 188/U, 316/U CABLE)				
5	SLEEVE	DELTRIN	NATURAL	1			ISSUED						
4	CONTACT PIN	BRASS	GOLD	1									
3	INSULATOR	DELTRIN	NATURAL	1									
2	BODY	BRASS	NICKEL	1									
1	SHELL	ZINC DIECAST	NICKEL	1			SHEET 1 OF 1						
						CAD FILE		C:/CONNEX/112134.DWG		PART NO. 112134			
				DO NOT SCALE DRAWING				DWG. NO. 112134.DWG		REV. C	SIZE A	SCALE NA	
DESCRIPTION				MATERIAL	FINISH	QTY							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112134](#)