


Anforderungsstufe 1
Performance Level 1


Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating


Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

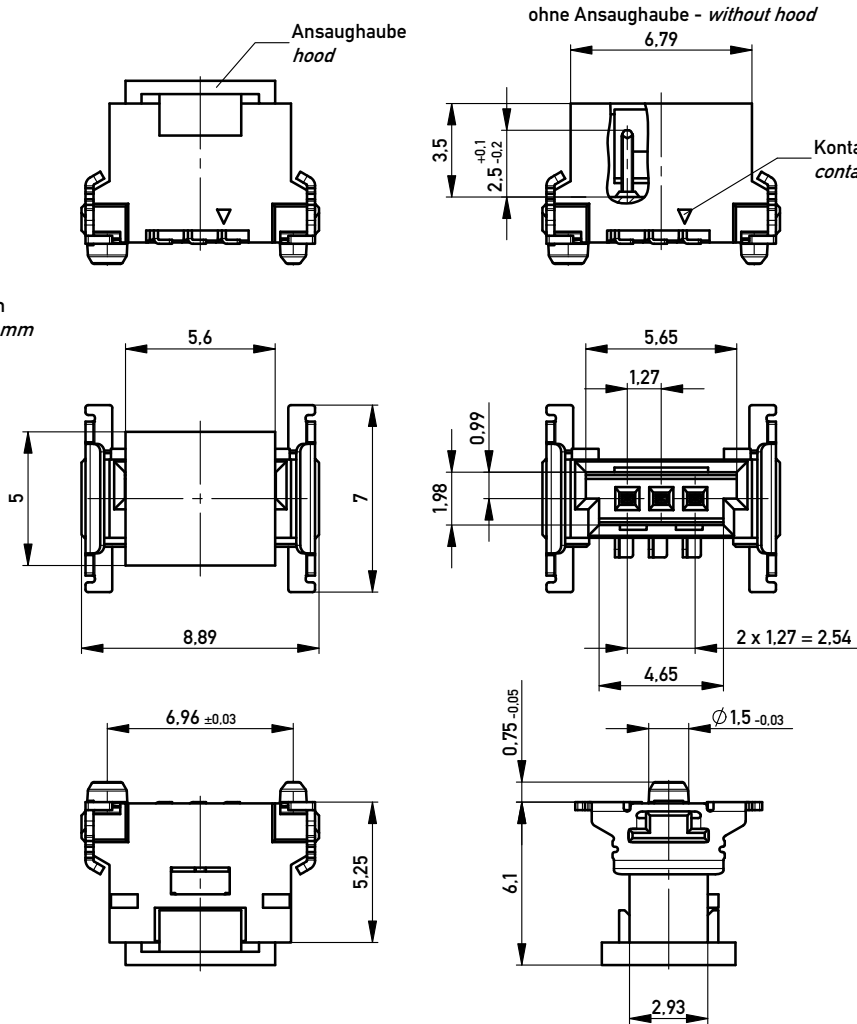


Leiterplatten-Layout für SMT
PCB-Layout for SMT

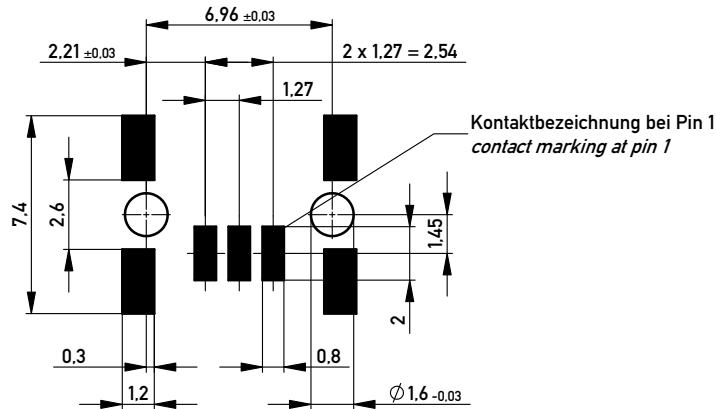

Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 650 Stück
Packaging unit: 650 pcs



Abspulrichtung - Reel off Direction

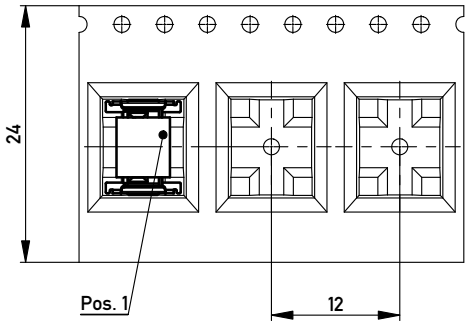

Information:			Tolerances		 All Dimensions in mm		Scale 5:1					
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.			Designation M 1,27 SRC P, 3-polig BA1						
						 www.ERNI.com				284696		I A3
			d		03.04.2013						Class	
Index		Date										

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 1001, to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[284696](#)