

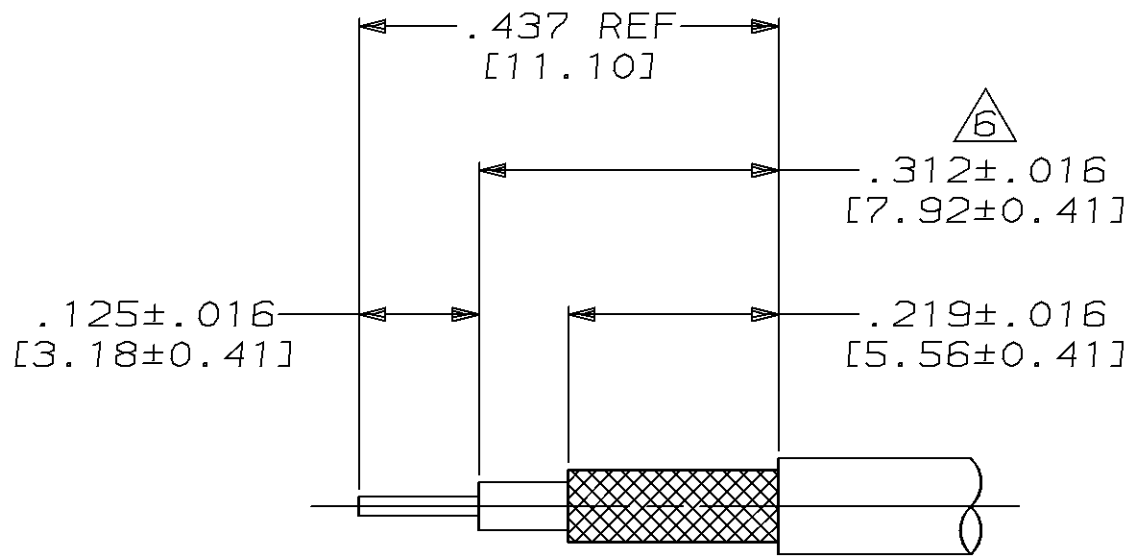
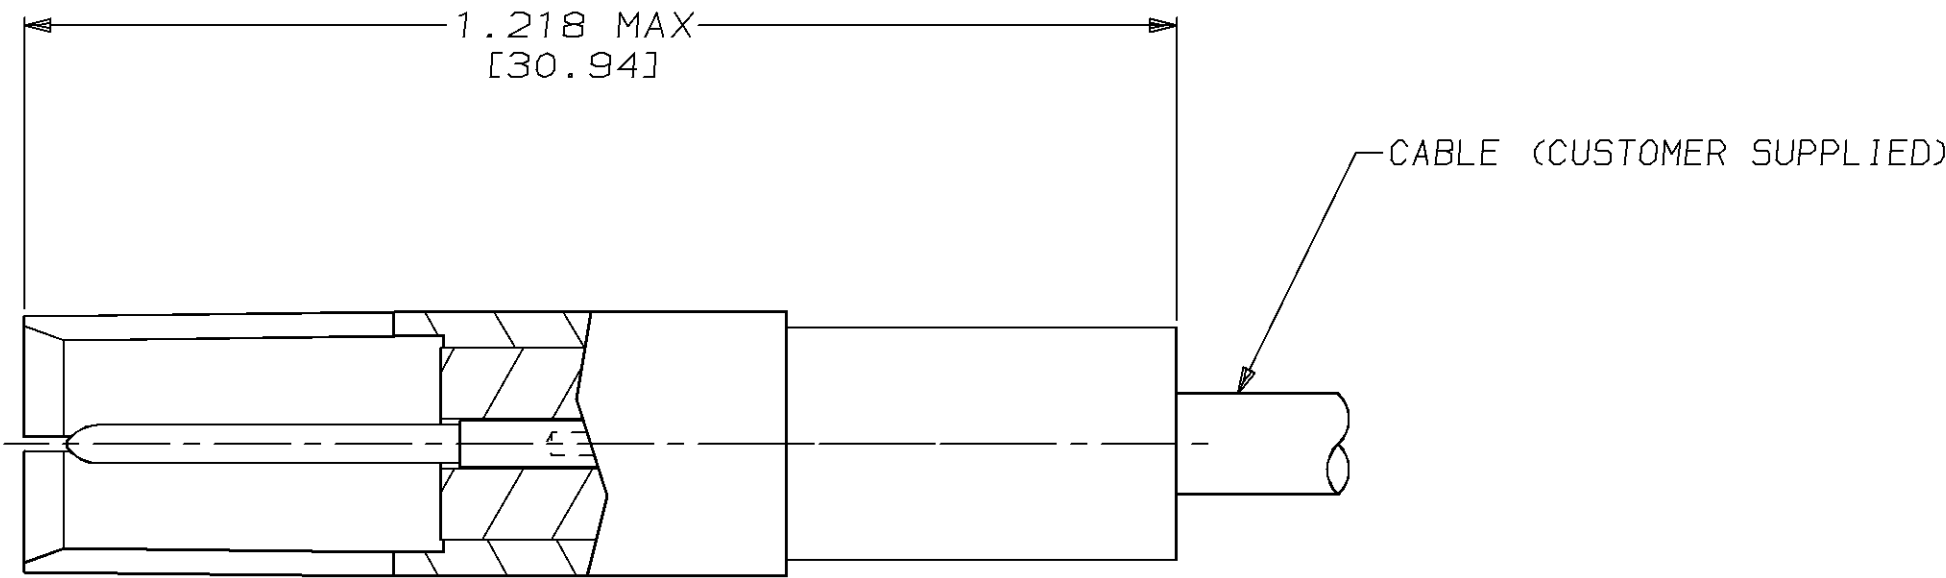


PROD	LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
3321	DF	X0					REV & REDRAWN; 0600-1969-94 CT	2-95	JD
CODE			✓			E			

ASSEMBLED VIEW

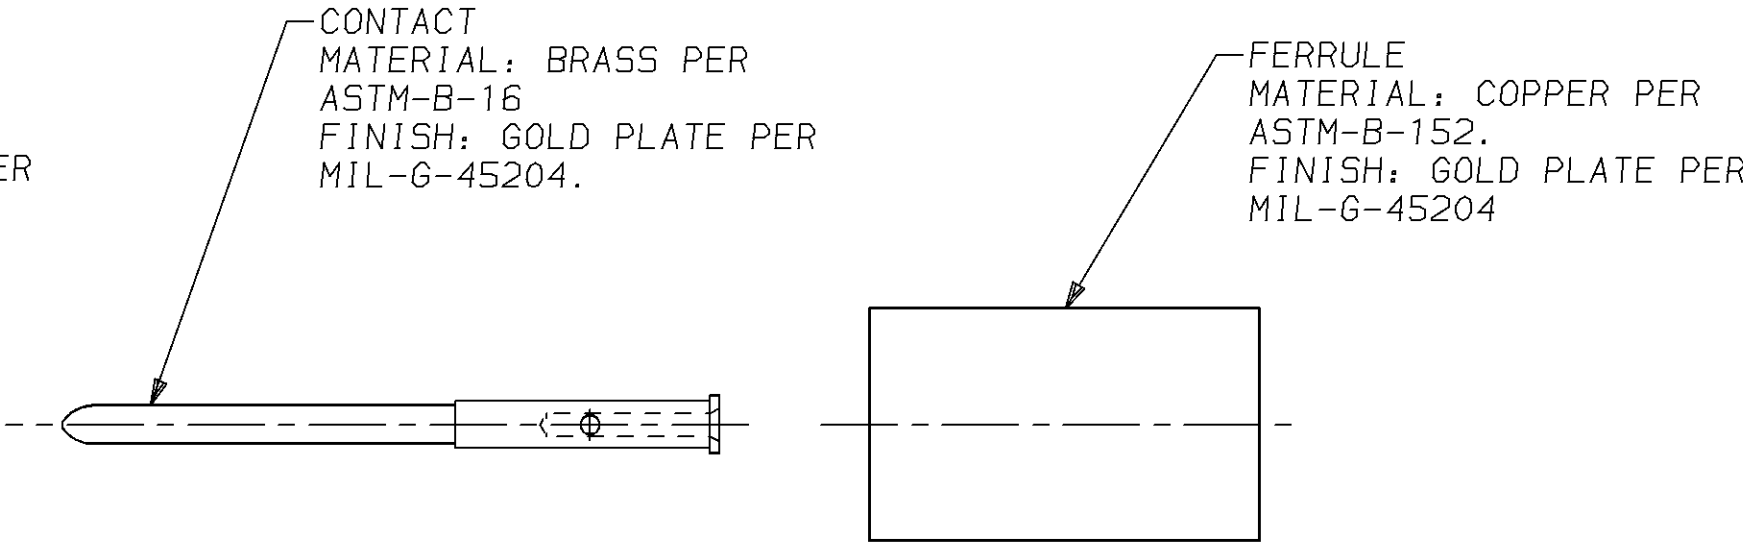

RECOMMENDED STRIP LENGTH
SCALE: N.T.S.

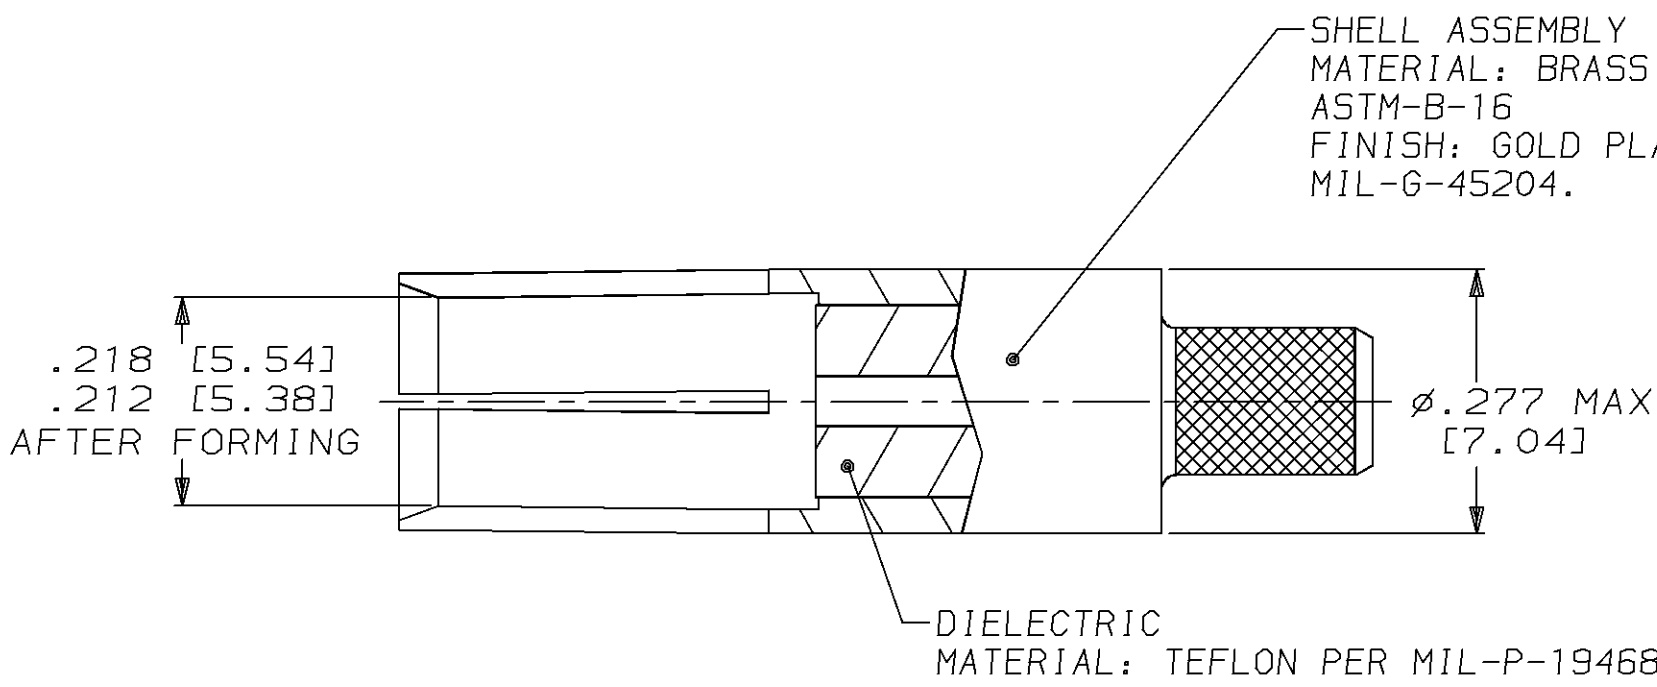

- FOR USE WITH RG-180/U, 180A/U, 180B/U, 195/U & 195A/U COAX CABLE.
- FERRULE CRIMPING TOOL: AMP TOOL #220066-1 CRIMP B OR #220066-2 CRIMP B.
- CONTACT CRIMPING TOOL: M22520/2-01 OR AMP TOOL NUMBER 1-601966-6, SETTING NUMBER 5. DANIELS POSITIONER PART NO. K345 OR AMP TOOL NO. 1-601966-6.
- SEE I.S.2348.
- DANIELS MANUFACTURING CORP
2266 FRANKLIN ROAD
BLOOMFIELD HILLS, MI 48013
- OUTER JACKET OF CABLE MUST BE TRIMMED TO ALLOW PROPER INTER-PIN CONTACT LOCATION AFTER FERRULE CRIMP OPERATION.
- PARTS SHIPPED UNASSEMBLED AND CABLE IS SUPPLIED BY CUSTOMER.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	DR 2-1-95 C.C.THOMAS	AMP AMP Incorporated Harrisburg, PA 17105-3608			
	CHK 2-2-95 J.DUNBAR				
	APPD 2-2-95 J.DUNBAR	NAME CONNECTOR, COAXIAL, RF SOCKET SIZE 5, ARINC (HEX CRIMP)			
APPD 2-2-95 C.C.THOMAS					
PRODUCT SPEC 108-12045					
MATERIAL SEE CALLOUTS	APPD 2-2-95 C.C.THOMAS	SIZE CAGE CODE DRAWING NO C=225791-8			
	PRODUCT SPEC 108-12045				
FINISH SEE CALLOUTS	APPLICATION SPEC -				
	WEIGHT -	SCALE 5:1		SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[225791-8](#)