


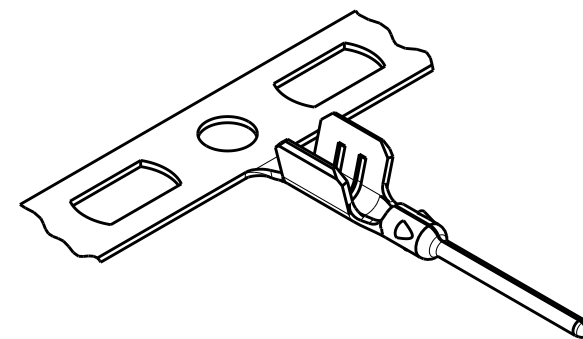

1. BRASS.

2. NOTE DELETED.

3. CRIMP PIN CONTACT USING APPLICATOR PART NUMBER 1385456-3.

4. CRIMP PIN CONTACT USING APPLICATOR PART NUMBER 1385675-3.

5. NOTE DELETED.


6. CRIMP PIN CONTACT USING APPLICATOR PART NUMBER 680900-1 OR 1385623-3-A.

7. CRIMP PIN CONTACT USING APPLICATOR PART NUMBER 680901-1 OR 1385624-3.

8. NOTE DELETED.

9. PIN CONTACT WILL ACCEPT COAXIAL CABLE: SEE TABLE.

10. 0.76 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH IN LOCALIZED GOLD FLASH AREA, BOTH OVER 2.0 μm MIN NICKEL. GOLD FLASH ALLOWABLE ON ENTIRE PART.

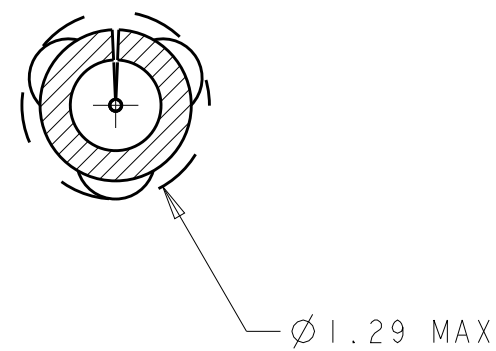

Technical drawing of a mechanical part, likely a shaft or rod, showing dimensions $D \pm 0.25$, $E \pm 0.25$, and $F \pm 0.25$. The drawing includes a cross-hatched section and a break symbol on the left end.

4.02	3.11	9.91	1.30	1.22	0.38	RG-179 	1438890-9 
3.58	3.55	9.47	1.30	1.22	0.38	RG-62U/M, RG-71U/M 	
3.58	3.55	9.47	2.03	1.73	0.76	RG-62, RG-71 	1438890-8 
4.02	3.11	9.91	2.03	1.73	0.76	RG-59, 59 MINI 	
4.02	3.11	9.91	2.03	1.73	0.76	RG-174 LL, 1.5D-2VS 	
4.02	3.11	9.91	2.03	1.73	0.76	RG-316, RG-174 	
4.02	3.11	9.91	1.98	1.99	1.00	RTK031 	
4.02	3.11	9.91	1.98	1.99	1.00	RG-58, RG-58 LL 	1438890-7 
F	E	D	C	B	A	APPLICABLE CABLE SIZE	PART NUMBER

1471-9 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1438890-7](#)