


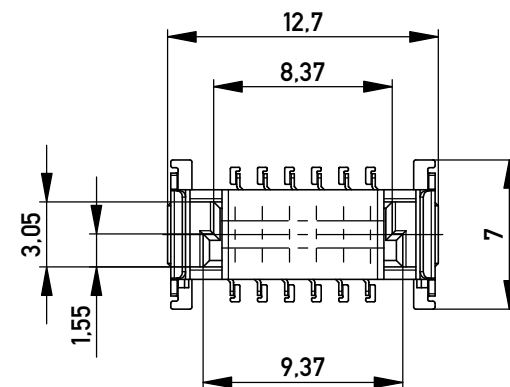
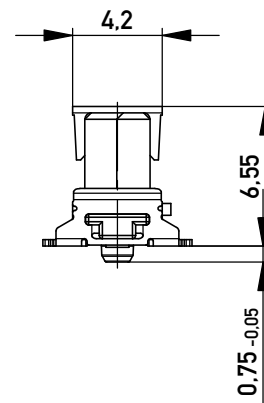
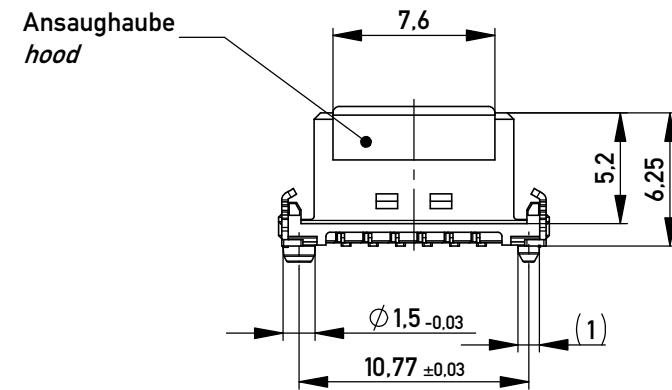




ohne Ansaughaube - without hood

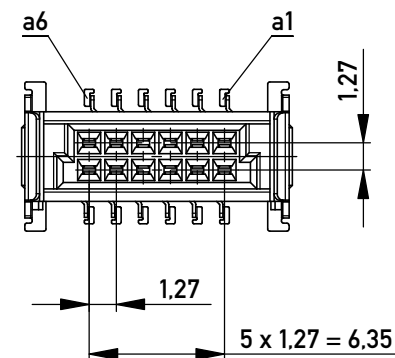

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

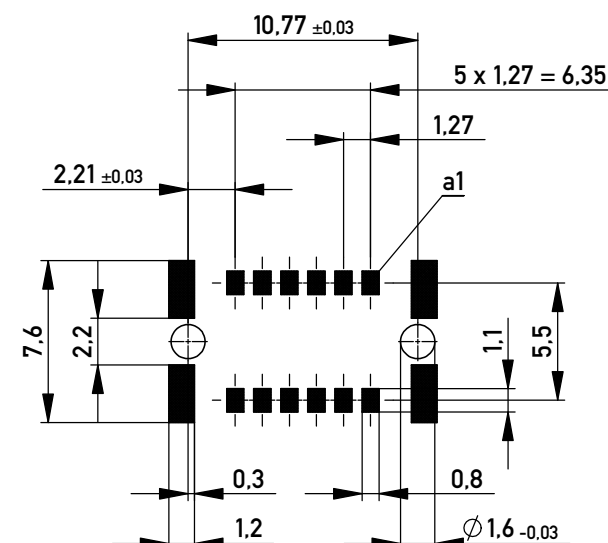


Anforderungsstufe 1
performance level 1

Kontaktbereich vergoldet
mating area gold plating


Anschlussbereich verzinkt 4-6 µm
terminal area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0,1 mm

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 280 Stück
packaging unit: 280 pcs




Abspulrichtung - Reel off Direction

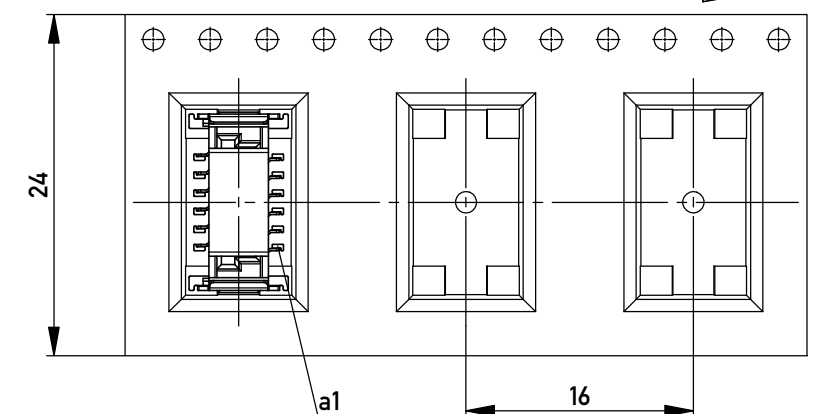

BA 7-13 - 8mm Bauhöhe

type7-13 - low profile

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16106 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 3:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation					
						Federl. SMC-B 12-SMD-BA7-13 <i>Female SMC-B 12-SMD-type7-13</i>					
				e		07.09.2018				www.ERNI.com	
Index		Date						Class		SMCB	
										A3	

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[154805](#)