


Pluggable Screw Terminal Block
180° Wire Entry

Specifications:

Application	Used with 5mm socket available with Sonalert® Solution models.
Electrical	Max Voltage: 300V Max Current: 15 Amp
Screw Terminal	Tightening Torque: 8 in-lbs
Connection strength	Minimum of 5 lbs to remove pluggable screw terminal block from socket of Sonalert device.
Operating Temperature	Max 110°C
Material	Housing: UL94V0 Polymide (Color Black) Screw: Steel / Zinc chromate
Wire Range	12 to 26 AWG
Wire Strip Length	¼ inch or 6mm
Dimensional Tolerances	1 place = ±.3 mm 2 places = ±.01 inch or .13 mm 3 places = ±.005 inch or .038 mm

Dimensions: Inches (mm)

Flame Retardant RoHS Compliant

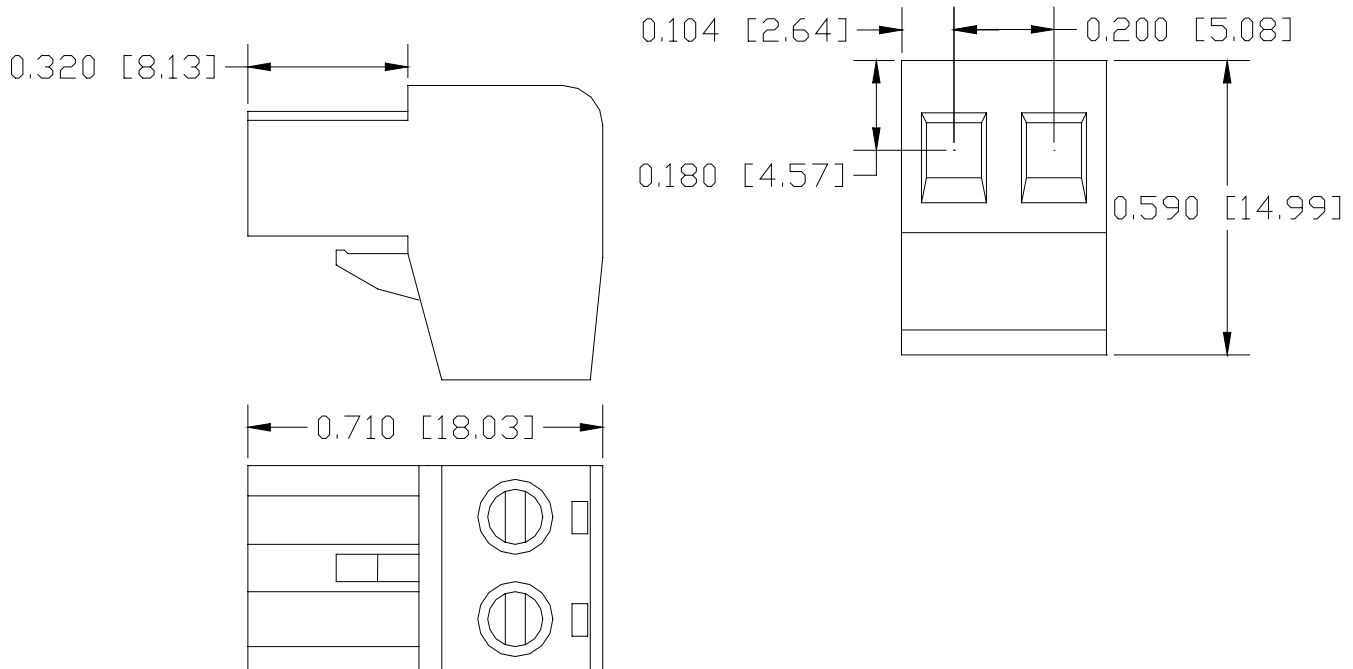

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[ACC02](#)