
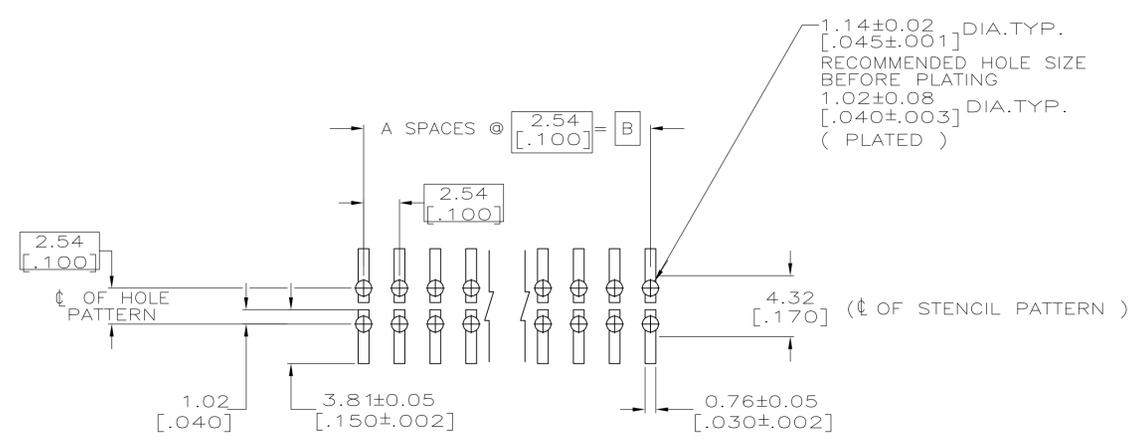
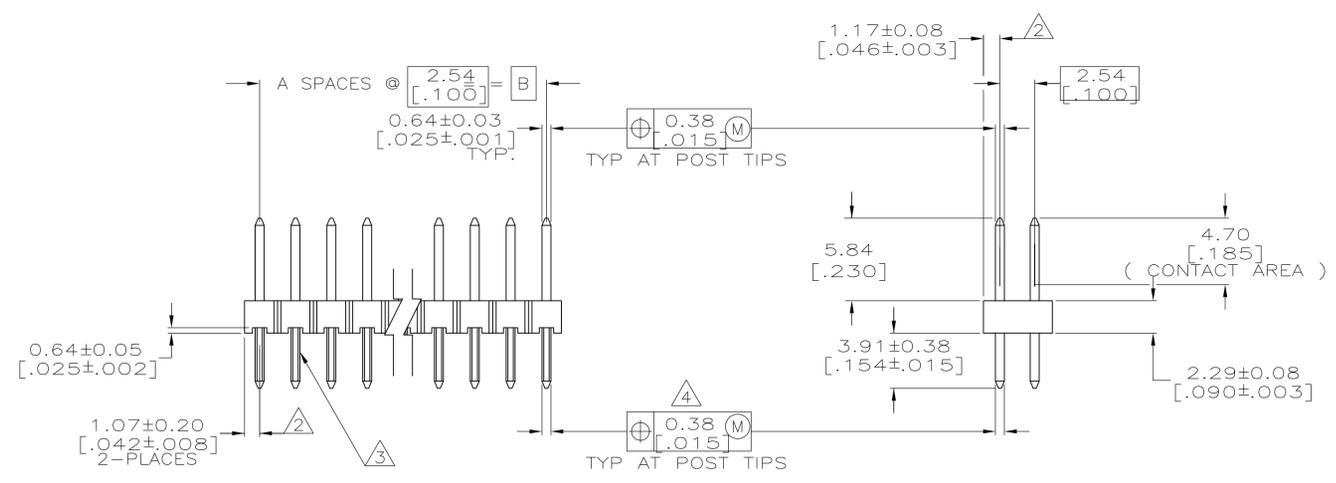


- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 3 RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- 4 $\varnothing 0.51$ [.020] (M) FOR KINKED TAILS.
- 5 HOUSING: LCP, COLOR-BLACK.
POST: COPPER ALLOY
- 6 0.000762[.000030] GOLD IN CONTACT AREA.
0.00254-0.00508 [.0000100-.0000200] MATTE TIN-LEAD ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.
- 7 0.000762[.000030] GOLD IN CONTACT AREA.
0.00254-0.00508 [.0000100-.0000200] MATTE TIN ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.

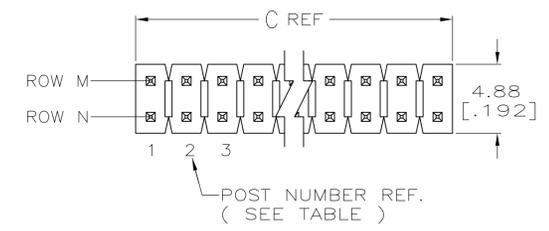

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
FOR .062 [1.57] THICK PC BOARD AND
.008 [.203] STENCIL THICK.

7	NONE	9	24.99 [.984]	22.86 [.900]	9	20	5-1571911-1
6	NONE	9	24.99 [.984]	22.86 [.900]	9	20	1571911-1
PLATING	ROW M	ROW N	C	B	A	NO. OF POSITIONS	PART NUMBER
	POSTS OMITTED						

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN	R	BROWN	25JUN04
DIMENSIONS: mm		CHK	J	GESFORD	25JUN04
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J	GESFORD	25JUN04
0. PLC	± -	NAME: HEADER ASSEMBLY, MOD II, BREAKAWAY, DOUBLE ROW, .100 X .100 CL, VERTICAL, WITH RETENTION FEATURE, APPLICATION SPEC			
1. PLC	± -	PRODUCT SPEC			
2. PLC	± 0.51(.02)	APPLICATION SPEC			
3. PLC	± 0.127(.005)	SIZE			
4. PLC	± 0.0127(.0005)	CAGE CODE			
ANGLES	± -	DRAWING NO			
MATERIAL	SEE TABLE	WEIGHT	-	A1	00779
		CUSTOMER DRAWING		SCALE	1:1
		SHEET		1	OF 1
		REV		D	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1571911-1](#)