
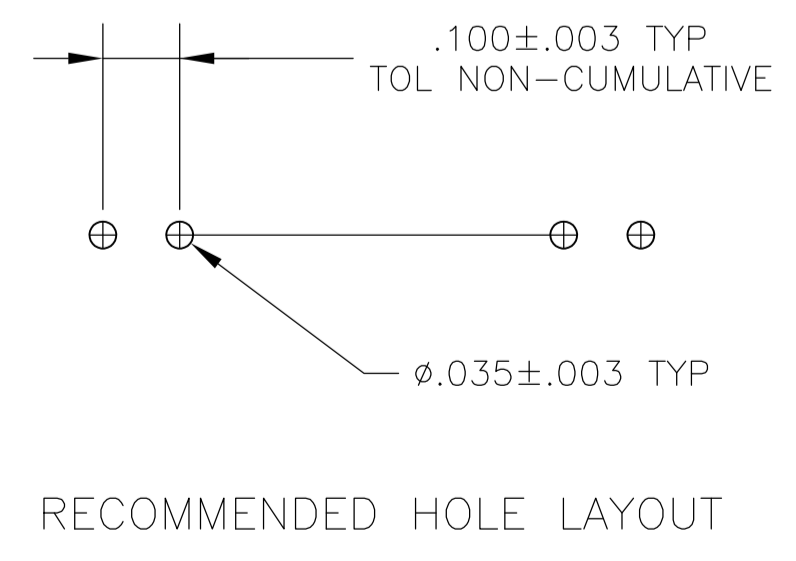


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

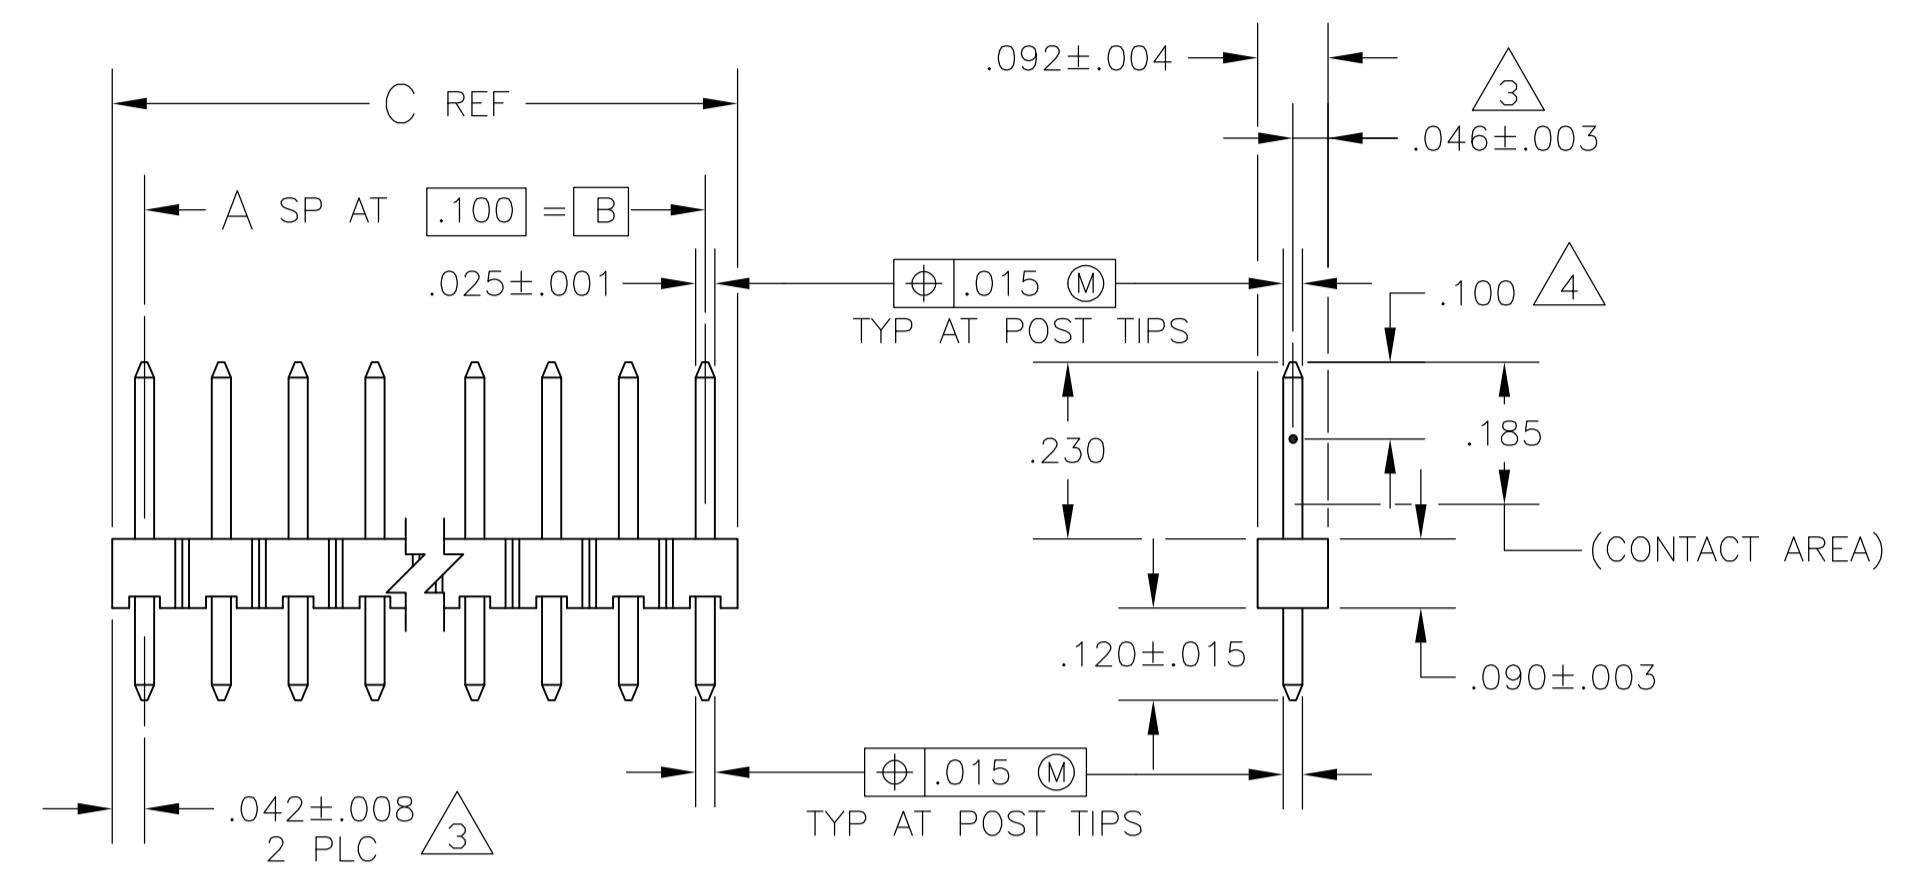

	3.984	3.900	39	40	4-103185-0
5	3.884	3.800	38	39	3-103185-9
	3.784	3.700	37	38	3-103185-8
OBSOLETE	3.684	3.600	36	37	3-103185-7
	3.584	3.500	35	36	3-103185-6
5	3.484	3.400	34	35	3-103185-5
	3.384	3.300	33	34	3-103185-4
OBSOLETE	3.284	3.200	32	33	3-103185-3
	3.184	3.100	31	32	3-103185-2
5	3.084	3.000	30	31	3-103185-1
	2.984	2.900	29	30	3-103185-0
OBSOLETE	2.884	2.800	28	29	2-103185-9
	2.784	2.700	27	28	2-103185-8
5	2.684	2.600	26	27	2-103185-7
	2.584	2.500	25	26	2-103185-6
OBSOLETE	2.484	2.400	24	25	2-103185-5
	2.384	2.300	23	24	2-103185-4
5	2.284	2.200	22	23	2-103185-3
	2.184	2.100	21	22	2-103185-2
OBSOLETE	2.084	2.000	20	21	2-103185-1
	1.984	1.900	19	20	2-103185-0
5	1.884	1.800	18	19	1-103185-9
	1.784	1.700	17	18	1-103185-8
OBSOLETE	1.684	1.600	16	17	1-103185-7
	1.584	1.500	15	16	1-103185-6
5	1.484	1.400	14	15	1-103185-5
	1.384	1.300	13	14	1-103185-4
OBSOLETE	1.284	1.200	12	13	1-103185-3
	1.184	1.100	11	12	1-103185-2
5	1.084	1.000	10	11	1-103185-1
	0.984	0.900	9	10	1-103185-0
SUPERCEDED BY 6-146280-5	.884	.800	8	9	103185-9
	.784	.700	7	8	103185-8
5	.684	.600	6	7	103185-7
	.584	.500	5	6	103185-6
OBSOLETE	.484	.400	4	5	103185-5
	.384	.300	3	4	103185-4
5	.284	.200	2	3	103185-3
	.184	.100	1	2	103185-2
OBSOLETE	.084	—	—	1	103185-1
	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN	H. MOLL	13OCT87
DIMENSIONS: INCHES		CHK	T. CLARK	20OCT87
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	T. CLARK	20OCT87
0 PLC ± -		NAME	HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100CL, VERTICAL, WITH .025 SQUARE POSTS	
1 PLC ± -		APPLICATION SPEC	—	
2 PLC ± -		SIZE	A1	
3 PLC ± .005		WEIGHT	—	
4 PLC ± -		SCALE	4:1	
ANGLES ± -		SHEET	1 OF 1	
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK; POSTS: COPPER ALLOY		FINISH: POSTS: .00015 GOLD ON CONTACT AREA, .00100-000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .00050 NICKEL	REV	MM
CUSTOMER DRAWING		SCALE	4:1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103185-2](#)