


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/27/00	XXXXXX	INITIAL RELEASE
A	04/30/03	XXXXXX	UPDATE DRAWING FORMAT
B	01/12/12	2271	ADD NOTES
C	08/20/12	2358	ADD NOTES

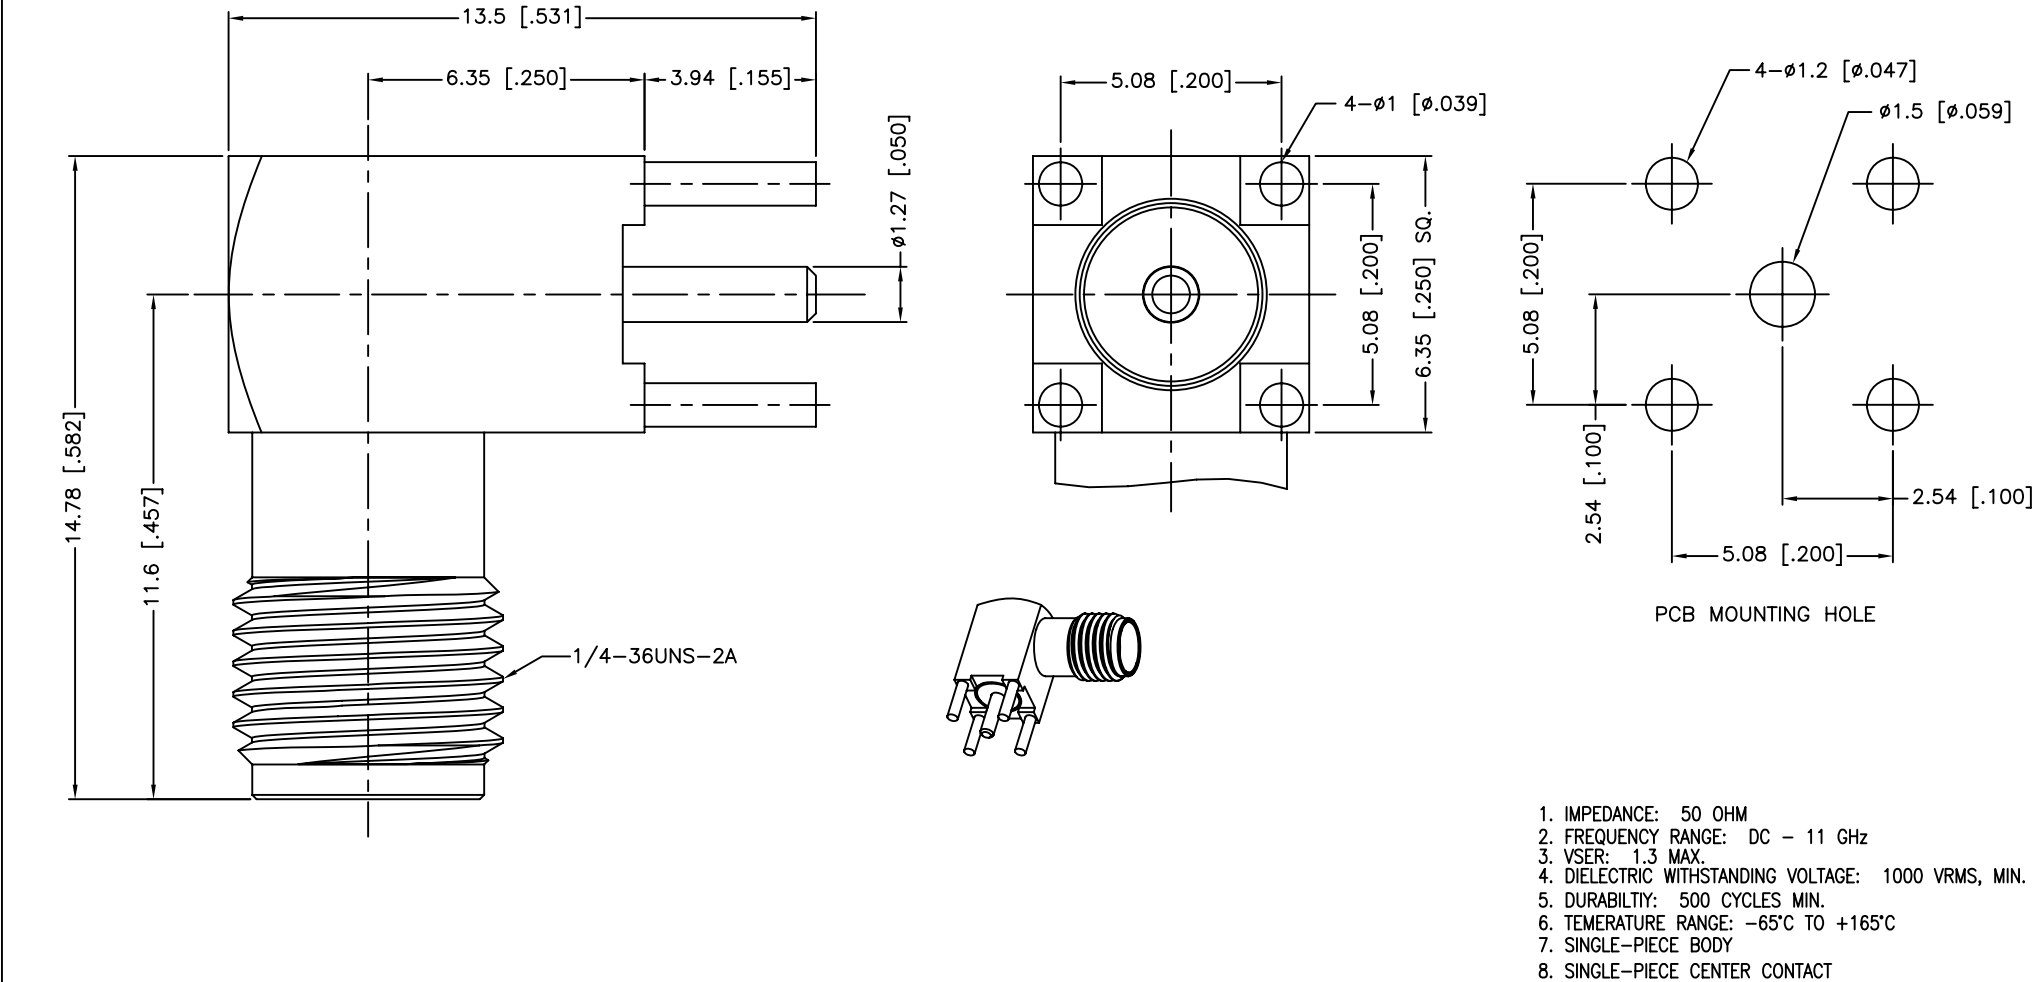

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC - 11 GHz
3. VSWR: 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -65°C TO +165°C
7. SINGLE-PIECE BODY
8. SINGLE-PIECE CENTER CONTACT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex				
					DRAWN M.ZHANG		08/20/12						
					CHECKED				PART DESCRIPTION SMA R/A P.C. MOUNT JACK				
					ISSUED								
SHEET 1 OF 1				PART NO. 132225									
CAD FILE C:/CONNEX/132225.DWG									DWG. NO. 132225.DWG REV. C SIZE A SCALE NA				
3	CONTACT PIN	BER. COPPER	GOLD	1									
2	INSULATOR	PTFE	NATURAL	1									
1	BODY	ZINC DIECAST	GOLD	1									
	DESCRIPTION	MATERIAL	FINISH	QTY									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[132225](#) [132225N](#)