

BOOM-M

 ${\sim}30^\circ$ medium beam. Assembly with 0.2 mm thick installation tape.

TECHNICAL SPECIFICATIONS:

Dimensions	22.2 mm
Height	14.3 mm
Fastening	tape
Colour	metal
Box size	480 x 280 x 300 mm
Box weight	5.4 kg
Quantity in Box	1680 pcs
ROHS compliant	yes 🛈



Colour


metal

MATERIAL SPECIFICATIONS:

Component BOOM-M BOOM-TAPE **Type** Reflector Tape

Material PC PU tape 0,25mm



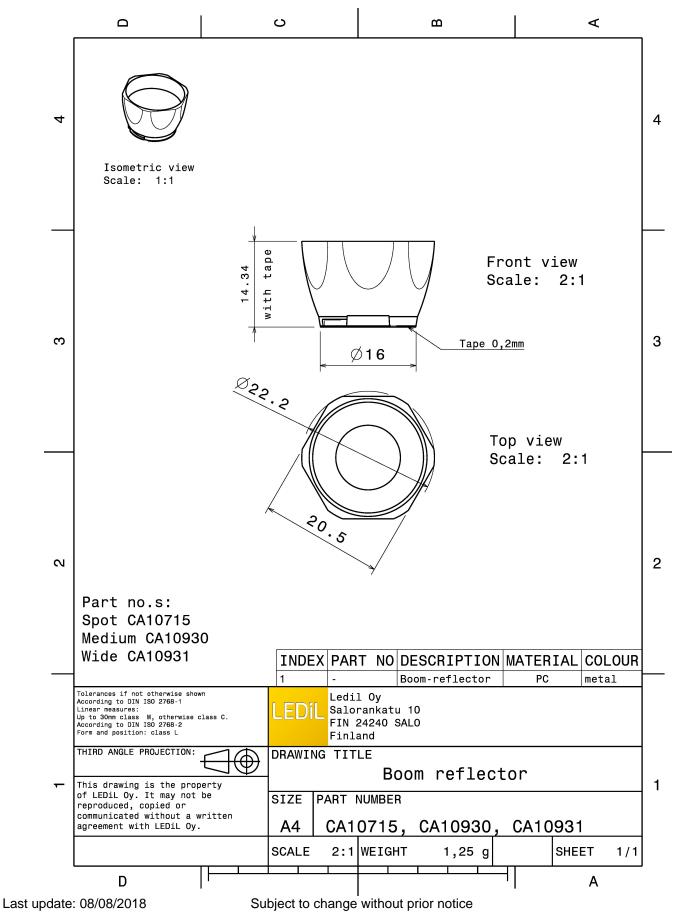

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.



PHOTOMETRIC DATA (MEASURED):

CREE LED FWHM Efficiency Peak intensity Required comp	MHB-A/B 31.0° 82 % 2.230 cd/lm	
CREE LED FWHM Efficiency Peak intensity Required comp	MHD-E/G 34.0° 82 % 1.700 cd/lm	500 500 500 500 500 500 500 500 500 500
LUMIL LED FWHM Efficiency Peak intensity Required comp	LUXEON M/MX 30.0° 79 % 2.240 cd/lm	
CUMIL LED FWHM Efficiency Peak intensity Required comp	LUXEON MZ 20.0° 75 % 4.000 cd/lm	257 0° 25 ³



PHOTOMETRIC DATA (MEASURED):

Ø NICHIA		90 ⁴ 90 ⁴	
LED FWHM Efficiency Peak intensity Required comp	NFMW48xA 23.0° 80 % 3.100 cd/lm	27	
OSRAM Opto Semiconductors		50* 50*	
LED	Duris S10	73	
FWHM	28.0°		
Efficiency	74 %	60. C.	
Peak intensity	2.500 cd/lm		
Required comp	onents:	300 900 900 900 900 900 900 900 900 900	
SEOUL SEOUL SEMICONDUCTOR			
LED	P7		
FWHM	33.0°		
Efficiency	%		
Peak intensity	1.860 cd/lm		
Required components:			



PHOTOMETRIC DATA (SIMULATED):

Μ ΝΙCΗΙΛ		35*
LED	COB S-Type (LES 7)	73*
FWHM	31.6°	
Efficiency	82 %	69 ⁴⁻⁴ 000
Peak intensity	2.100 cd/lm	
Required compor	ents:	47° 45°
OSRAM Opto Semiconductors		90* 90*
LED	Duris S8	75
FWHM	25.7°	00
Efficiency	87 %	92-
Peak intensity	2.920 cd/lm	100
Required compor	ents:	30° 300 30°
OSRAM Opto Semiconductors		50°
LED	OSCONIQ P 7070	77
FWHM	25.0°	
Efficiency	85 %	60°
Peak intensity	3.320 cd/lm	
Required compor	ents:	2 ¹ 2 ¹ 2 ¹ 2 ¹ 2 ¹ 2 ¹ 2 ¹ 2 ¹



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/

where_to_buy

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ledil: CA10930_BOOM-M