


Stecklänge / *mating length*

E = *early mate, late break* / voreilend
S = standard
L = *late mate, early break* / nacheilend

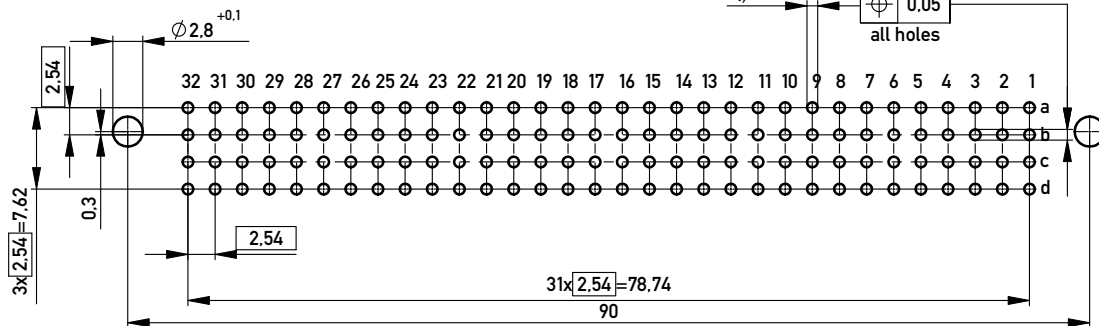

Elastische Einpresszone / *compliant pressfit zone*
Isolierwerkstoff / *housing material* : PBT GF 30

Bauart 4 / type 4

Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 114124

diameter of drilled hole see drawing 114124

1) $\phi 1,0^{+0,09}$ Durchmesser des metalliseiten Loches

$\phi 1.0^{+0.09}_{-0.06}$ *Diameter of finished plated-through hole*

Bedruckung siehe Zeichnung 294905

Marking see drawing 294905

Information:  All Dimensions in mm	Tolerances		Scale	2:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.		Designation Messerleiste RD 128 EE <i>Male Connector RD 128 EE</i>		
		www.ERNI.com	374466		I A3
-		02.06.2009			
Index		Date		Class	STVRD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[374466](#)