

PANDUIT PART NUMBER	WEIGHT
DPA485E88TGY	2.36 lb (1070.48 g)

1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.

UL94V-0
THERMOPLASTIC RESIN
RJ45 MODULES:
STEEL HOUSING:
PANEL MOUNTING

PUNCHDOWN BLOCKS: THERMOPLASTIC
RESIN UL94V-0

BEZEL ASSEMBLY: THERMOPLASTIC RESIN
UL94H-B

3. 48 PORT ANGLED PATCH PANEL 8 POSITION
8 WIRE.

4. THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.

5. FOUR (4) 12-24 X 1 1/2" ROUND HEAD SCREWS AND (4) M6x1x15MM METRIC

SCREWS ARE PROVIDED FOR FASTENING TO RACKS.


6. DIMENSIONS IN BRACKETS ARE IN METRIC.
7. USE 110 STYLE TERMINATION

TOOL FOR PUNCHDOWN.

8. RETENTION CAPS

D. VENTILATION EXHAUST (ONE PER CONNECTOR)

PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

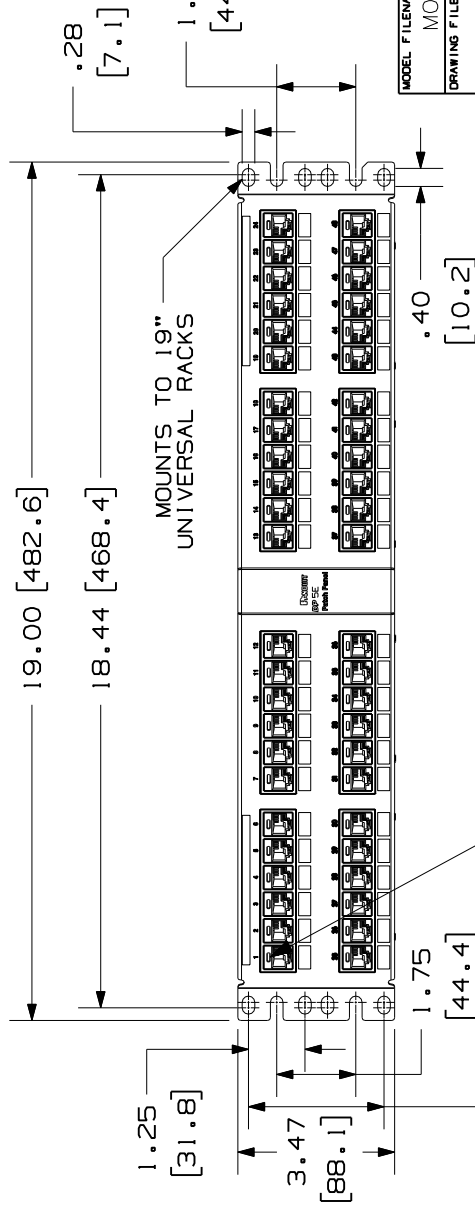

CID**-C & CIP**-C, PHONE OR DATA ICON
LOCATES HERE. IDENTIFIES INDIVIDUAL PORT.
OPTIONAL, NOT SUPPLIED.

MODEL FILENAME	M02088AD_2RU_48PORT_ANG_PANEL_ASSY_03	SIZE A
DRAWING FILENAME	M02479JG-DC243-00A	

DP5E 48 PORT ANGLED PATCH
PANEL CUSTOMER DRAWING

[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[DPA485E88TGY](#)