

SPECIFICATION CONTROL DRAWING


55PC1151

TITLE
FIVE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT

Date
2-5-00

Revision
A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

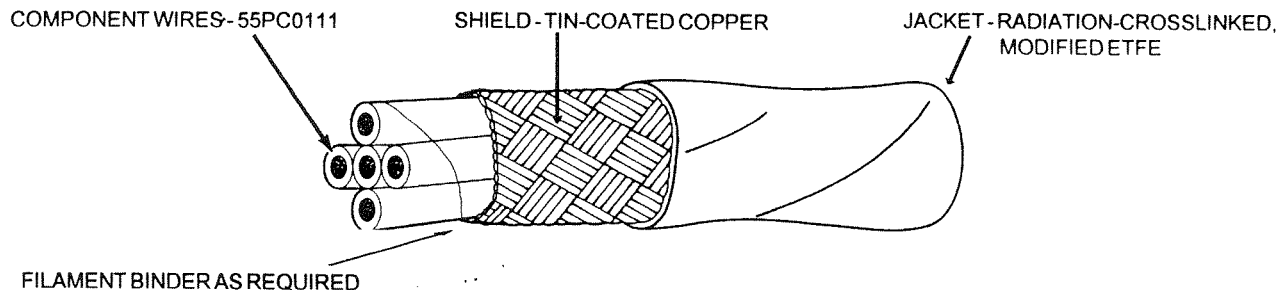

CONSTRUCTION DETAILS									
PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC1151-26-*	26	38	.0060	.0080	.108	.120	.131	13.53	14.13
55PC1151-24-*	24	38	.0060	.0080	.120	.133	.145	17.36	18.03
55PC1151-22-*	22	38	.0060	.0080	.136	.150	.163	23.08	23.84
55PC1151-20-*	20	38	.0065	.0085	.158	.173	.188	32.14	33.09
55PC1151-18-*	18	38	.0065	.0085	.183	.200	.217	45.04	46.20
55PC1151-16-*	16	38	.0070	.0090	.202	.222	.241	55.72	57.17

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The *** in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 22, red, blue, yellow, green and black component wires; white jacket: 55PC1151-22-2/6/4/5/0-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

Raychem

300 Constitution Drive, Menlo Park, California 94025
1-800-2 RAYCHEM FAX: 415-361-6297

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55PC1151-24-CML5-9CS2502](#)