
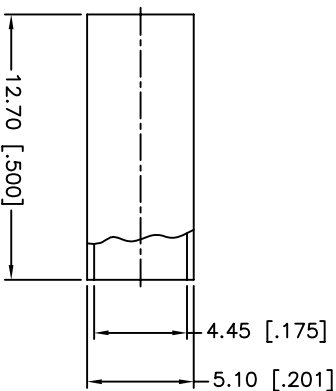
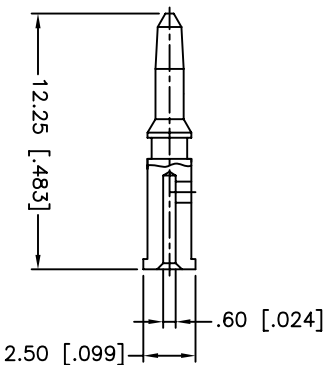
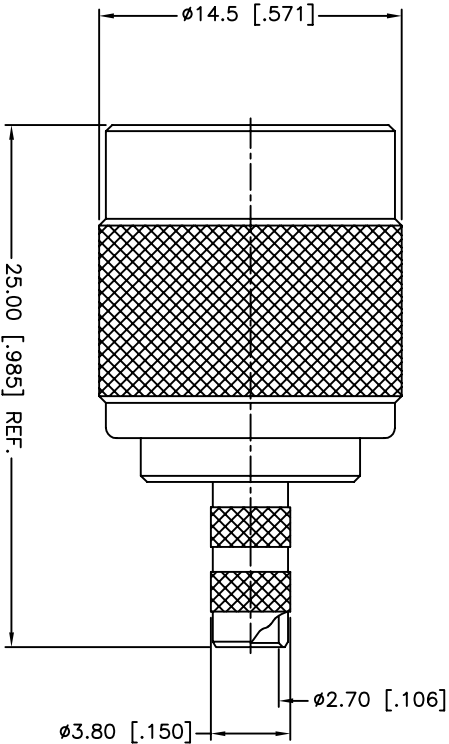


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/20/09	XXXXXX	INITIAL RELEASE

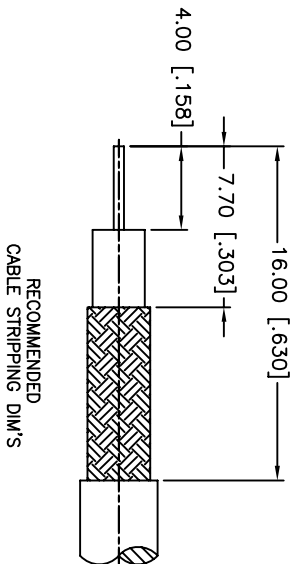

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

9	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, DIMENSIONS FOR INCHES ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE	Amphenol Connex TNC CRIMP PLUG (FOR BELDEN 1865A, 8218, B1417B, B1164B, RG-B809) PART DESCRIPTION PART NO. 122457 DWG. NO. 122457.DWG REV. NC SIZE A SCALE NA	
8	WASHER	BRASS	NICKEL	1		DRAWN C. WANG		08/20/09		
7	RING	DELTRIN	NATURAL	1		CHECKED				
6	RETAINER RING	BRASS	NICKEL	1		ISSUED				
5	GASKET	RUBBER	RED	1		SHEET 1 OF 1				
4	CONTACT PIN	BRASS	GOLD	1		CAD FILE C:/CONNEX/122457.DWG				
3	INSULATOR	DELTRIN	NATURAL	1						
2	BODY	BRASS	NICKEL	1						
1	SHELL	BRASS	NICKEL	1						
DESCRIPTION				MATERIAL		FINISH		QTY		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122457](#)