



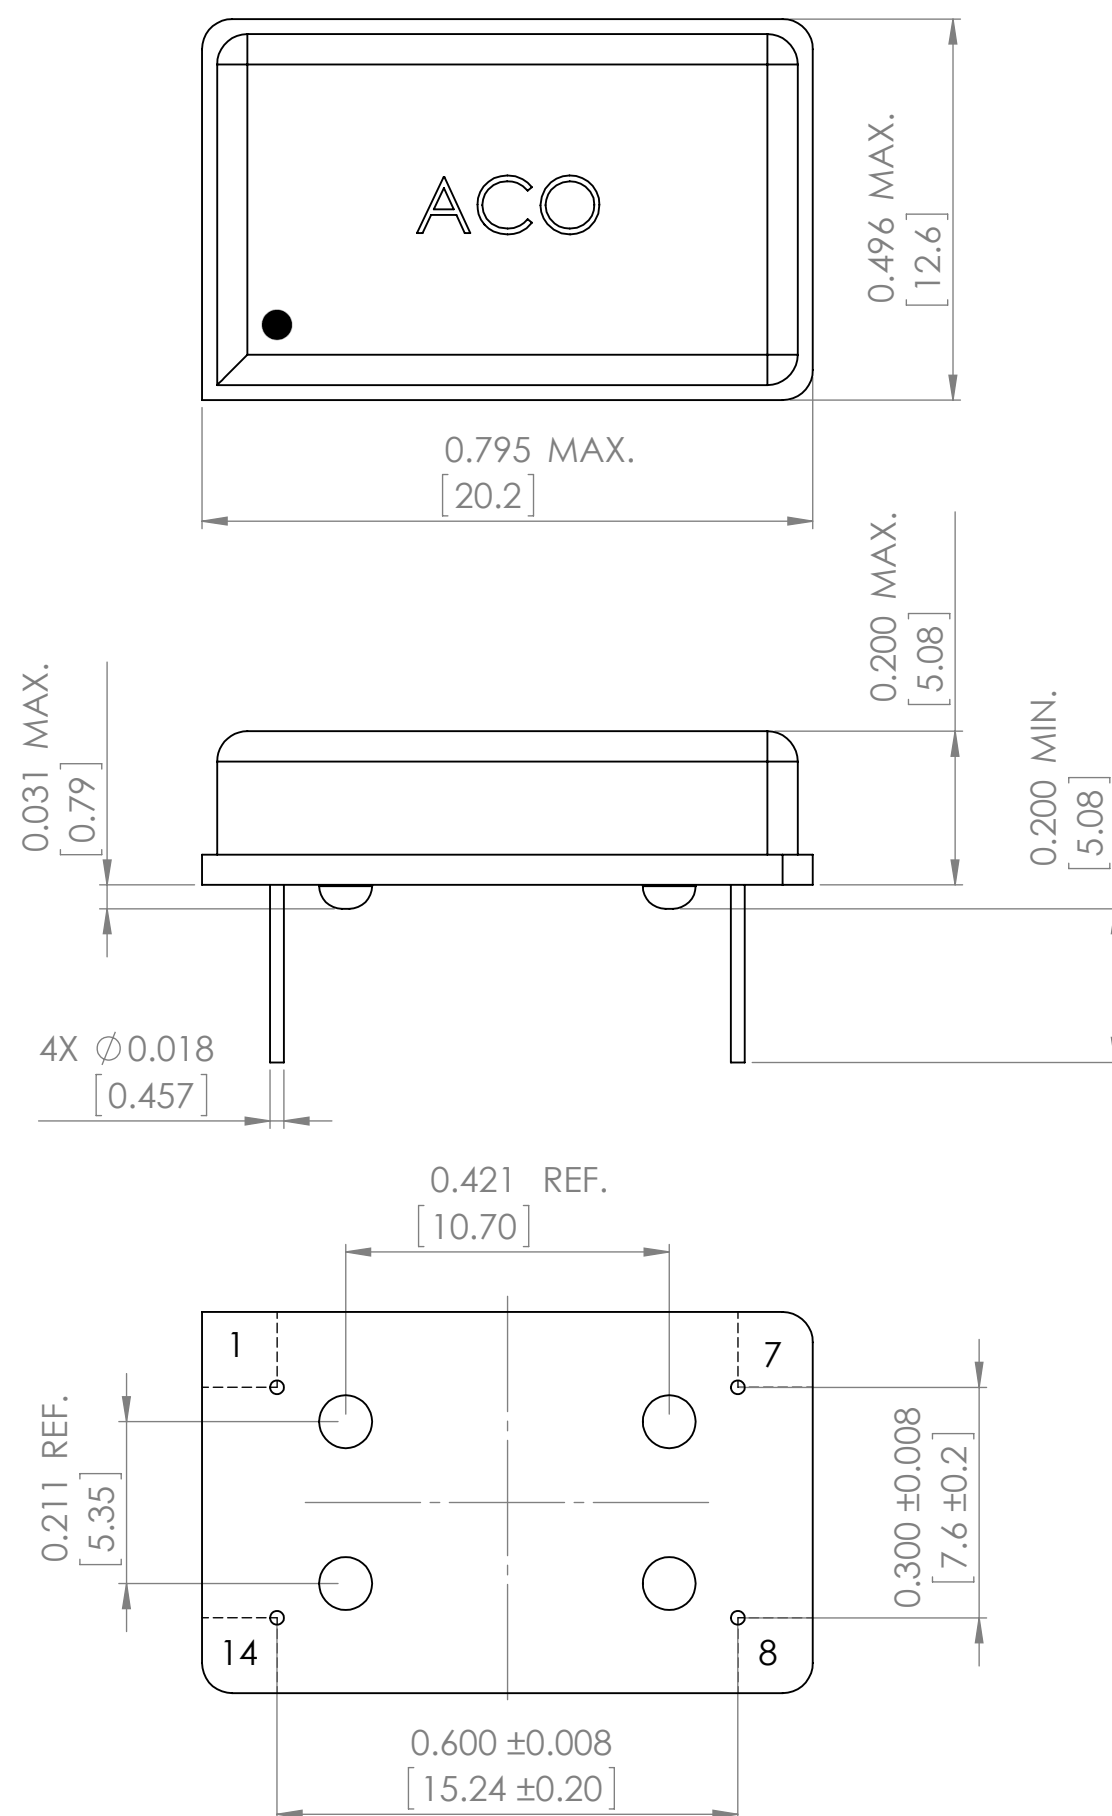

PIN	FUNCTION
1	NC or Tristate
7	GND/Case
8	Output
14	VDD

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 7 and 14

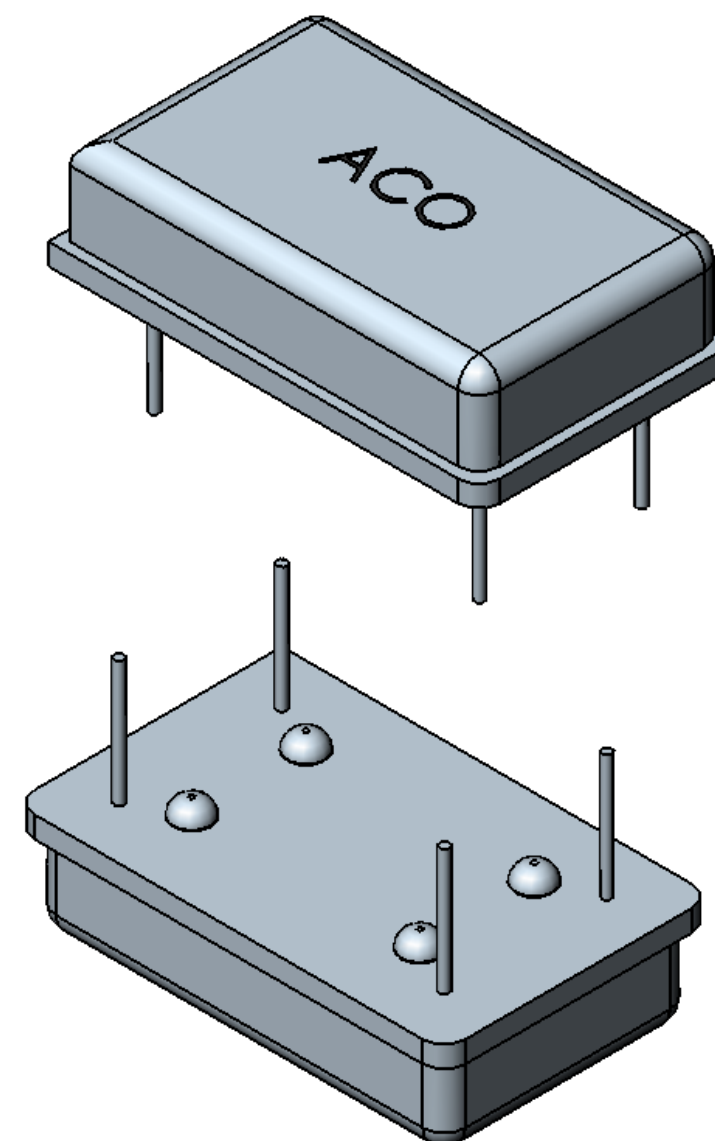

TOP PACKAGE MARKING IS FOR ILLUSTRATION PURPOSES ONLY

The height of the package vary depending on the frequency >100MHz. Please contact ABRACON for the height information for F>100MHz.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCH(MM) SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				FINISH:		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION -	
DRAWN SAAZVAT				SIGNATURE		DATE		 30332 Esperanza, Rancho Santa margarita, California 92688			
CHK'D XXXXXX								TITLE: OSCILLATOR			
APPV'D								DWG NO. ACO			
MFG								A3			
Q.A						MATERIAL:		SCALE:4:1			
						WEIGHT:		SHEET 1 OF 1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[ACO-40.000MHZ-EK](#) [ACO-12.000MHZ-EK](#) [ACO-8.000MHZ-EK](#) [ACO-50.000MHZ-EK](#) [ACO-27.000MHZ-EK](#) [ACO-14.31818MHZ-EK](#) [ACO-48.000MHZ-EK](#) [ACO-4.000MHZ-EK](#) [ACO-16.000MHZ-EK](#) [ACO-3.6864MHZ-EK](#) [ACO-25.000MHZ-EK](#) [ACO-10.000MHZ-EK](#) [ACO-11.0592MHZ-EK](#) [ACO-32.768MHZ-EK](#) [ACO-20.000MHZ-EK](#) [ACO-32.000MHZ-EK](#) [ACO-18.432MHZ-EK](#) [ACO-24.576MHZ-EK](#) [ACO44.000MHZEK](#) [ACO-32.768KHZ](#) [ACO-110.000MHZ-EC-G](#)