

## Standard Rectifier Module

| 3~<br>Rectifier |          |
|-----------------|----------|
| $V_{RRM}$       | = 1600 V |
| $I_{DAV}$       | = 60 A   |
| $I_{FSM}$       | = 550 A  |


### 3~ Rectifier Bridge

Part number

VUO64-16NO7



 E72873



#### Features / Advantages:

- Package with DCB ceramic
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

#### Applications:


- Diode for main rectification
- For three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

#### Package: PWS-D Flat

- Industry standard outline
- RoHS compliant
- Easy to mount with two screws
- Height: 17 mm
- Base plate: Copper internally DCB isolated
- Advanced power cycling

| Rectifier  |                                              |                                                   |                                                     | Ratings                        |      |      |                   |
|------------|----------------------------------------------|---------------------------------------------------|-----------------------------------------------------|--------------------------------|------|------|-------------------|
| Symbol     | Definition                                   | Conditions                                        |                                                     | min.                           | typ. | max. | Unit              |
| $V_{RSM}$  | max. non-repetitive reverse blocking voltage | $T_{VJ} = 25^{\circ}\text{C}$                     |                                                     |                                |      | 1700 | V                 |
| $V_{RRM}$  | max. repetitive reverse blocking voltage     | $T_{VJ} = 25^{\circ}\text{C}$                     |                                                     |                                |      | 1600 | V                 |
| $I_R$      | reverse current                              | $V_R = 1600\text{ V}$                             | $T_{VJ} = 25^{\circ}\text{C}$                       |                                |      | 40   | $\mu\text{A}$     |
|            |                                              | $V_R = 1600\text{ V}$                             | $T_{VJ} = 150^{\circ}\text{C}$                      |                                |      | 1.5  | mA                |
| $V_F$      | forward voltage drop                         | $I_F = 20\text{ A}$                               | $T_{VJ} = 25^{\circ}\text{C}$                       |                                |      | 1.07 | V                 |
|            |                                              | $I_F = 60\text{ A}$                               |                                                     |                                |      | 1.30 | V                 |
|            |                                              | $I_F = 20\text{ A}$                               | $T_{VJ} = 125^{\circ}\text{C}$                      |                                |      | 0.96 | V                 |
|            |                                              | $I_F = 60\text{ A}$                               |                                                     |                                |      | 1.27 | V                 |
| $I_{DAV}$  | bridge output current                        | $T_C = 120^{\circ}\text{C}$<br>rectangular        | $T_{VJ} = 150^{\circ}\text{C}$<br>$d = \frac{1}{3}$ |                                |      | 60   | A                 |
| $V_{FO}$   | threshold voltage                            | } for power loss calculation only                 |                                                     | $T_{VJ} = 150^{\circ}\text{C}$ |      | 0.78 | V                 |
| $r_F$      | slope resistance                             |                                                   |                                                     |                                |      | 8.1  | m $\Omega$        |
| $R_{thJC}$ | thermal resistance junction to case          |                                                   |                                                     |                                |      | 1.1  | K/W               |
| $R_{thCH}$ | thermal resistance case to heatsink          |                                                   |                                                     |                                | 0.4  |      | K/W               |
| $P_{tot}$  | total power dissipation                      | $T_C = 25^{\circ}\text{C}$                        |                                                     |                                |      | 110  | W                 |
| $I_{FSM}$  | max. forward surge current                   | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 45^{\circ}\text{C}$                       |                                |      | 550  | A                 |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                                  |                                |      | 595  | A                 |
|            |                                              | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 150^{\circ}\text{C}$                      |                                |      | 470  | A                 |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                                  |                                |      | 505  | A                 |
| $I^2t$     | value for fusing                             | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 45^{\circ}\text{C}$                       |                                |      | 1.52 | kA <sup>2</sup> s |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                                  |                                |      | 1.48 | kA <sup>2</sup> s |
|            |                                              | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 150^{\circ}\text{C}$                      |                                |      | 1.11 | kA <sup>2</sup> s |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                                  |                                |      | 1.06 | kA <sup>2</sup> s |
| $C_J$      | junction capacitance                         | $V_R = 400\text{ V}; f = 1\text{ MHz}$            |                                                     |                                | 19   |      | pF                |

| Package PWS-D Flat |                                                              |                      | Ratings |      |      |      |
|--------------------|--------------------------------------------------------------|----------------------|---------|------|------|------|
| Symbol             | Definition                                                   | Conditions           | min.    | typ. | max. | Unit |
| $I_{RMS}$          | RMS current                                                  | per terminal         |         |      | 150  | A    |
| $T_{stg}$          | storage temperature                                          |                      | -40     |      | 125  | °C   |
| $T_{VJ}$           | virtual junction temperature                                 |                      | -40     |      | 150  | °C   |
| Weight             |                                                              |                      |         | 118  |      | g    |
| $M_D$              | mounting torque                                              |                      | 4.25    |      | 5.75 | Nm   |
| $M_T$              | terminal torque                                              |                      | 4.25    |      | 5.75 | Nm   |
| $d_{Spp/App}$      | creepage distance on surface   striking distance through air | terminal to terminal | 9.5     |      |      | mm   |
| $d_{Spb/Appb}$     |                                                              | terminal to backside | 13.0    |      |      | mm   |
| $V_{ISOL}$         | isolation voltage                                            | t = 1 second         | 3000    |      |      | V    |
|                    |                                                              | t = 1 minute         | 2500    |      |      | V    |

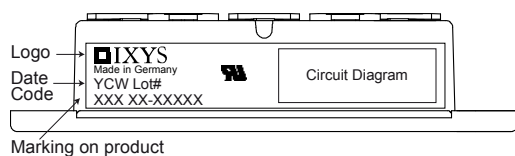


| Ordering | Part Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|-------------|--------------------|---------------|----------|----------|
| Standard | VUO64-16NO7 | VUO64-16NO7        | Box           | 10       | 508503   |

| Similar Part | Package | Voltage class |
|--------------|---------|---------------|
| VUO62-16NO7  | PWS-D   | 1600          |

### Equivalent Circuits for Simulation

\* on die level

$T_{VJ} = 150\text{ °C}$





Rectifier

|             |                    |      |    |
|-------------|--------------------|------|----|
| $V_{0\max}$ | threshold voltage  | 0.78 | V  |
| $R_{0\max}$ | slope resistance * | 6.9  | mΩ |

## Outlines PWS-D Flat

Max. allowed screw-in depth: 6 mm

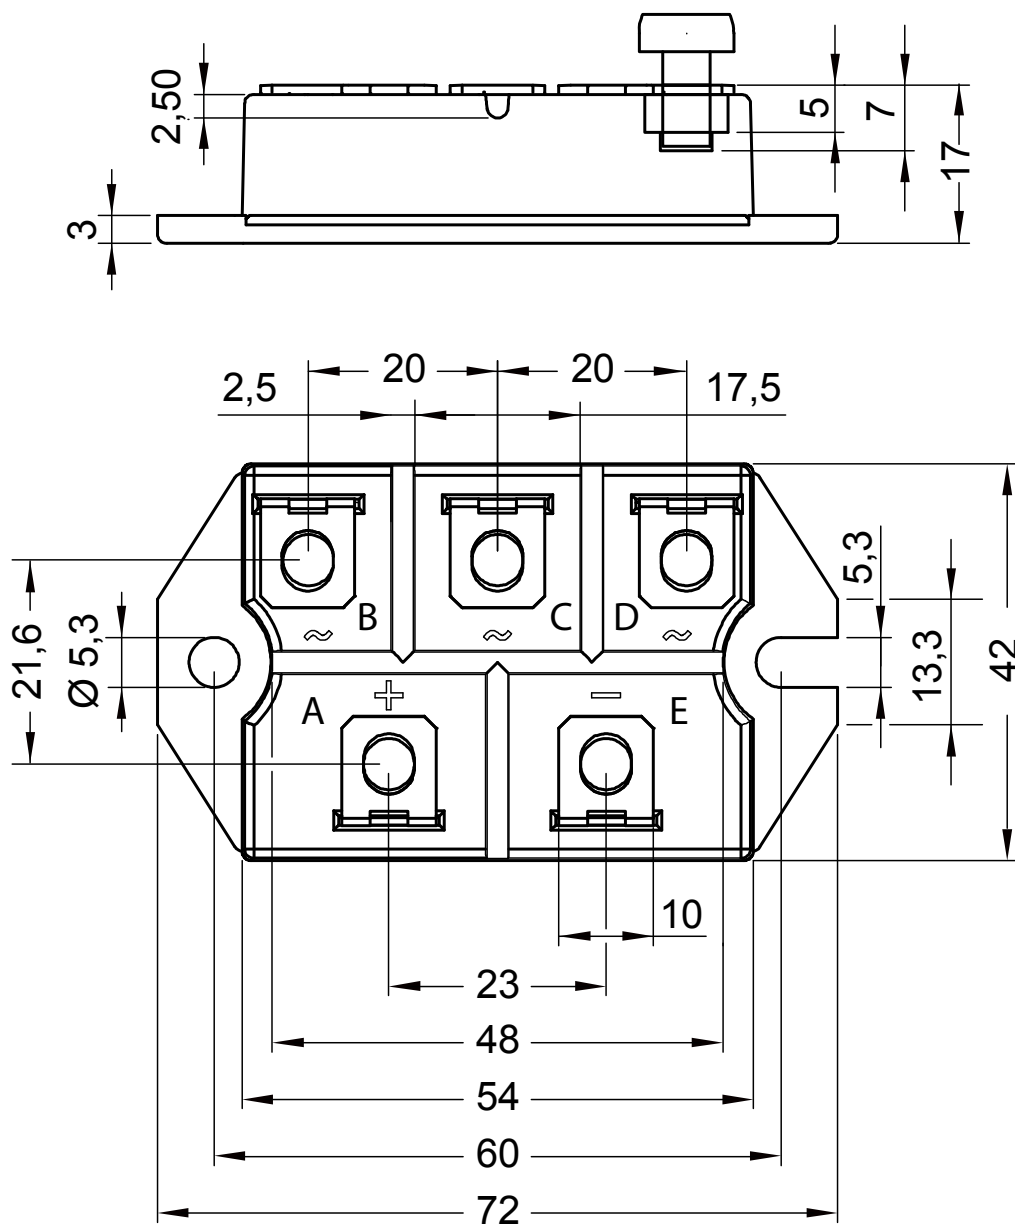

## Rectifier

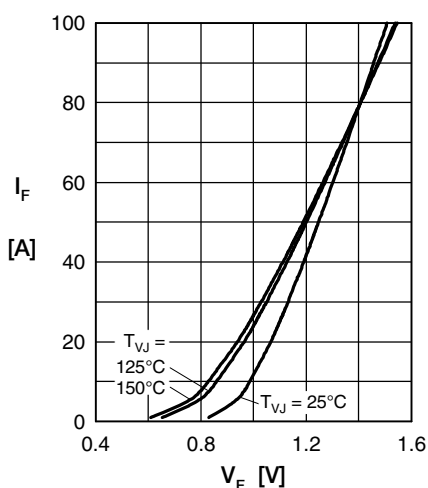


Fig. 1 Forward current vs. voltage drop per diode

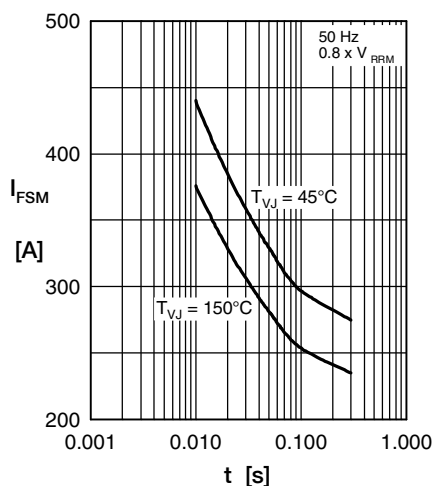


Fig. 2 Surge overload current vs. time per diode

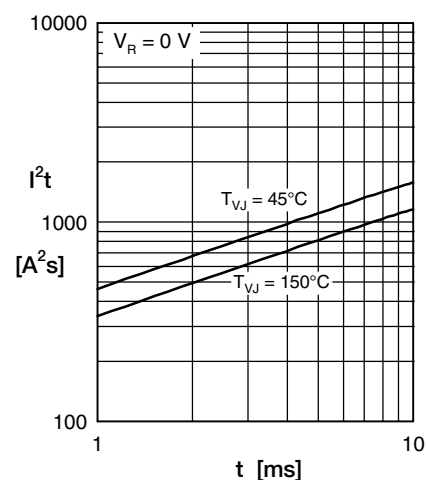


Fig. 3  $I^2t$  vs. time per diode

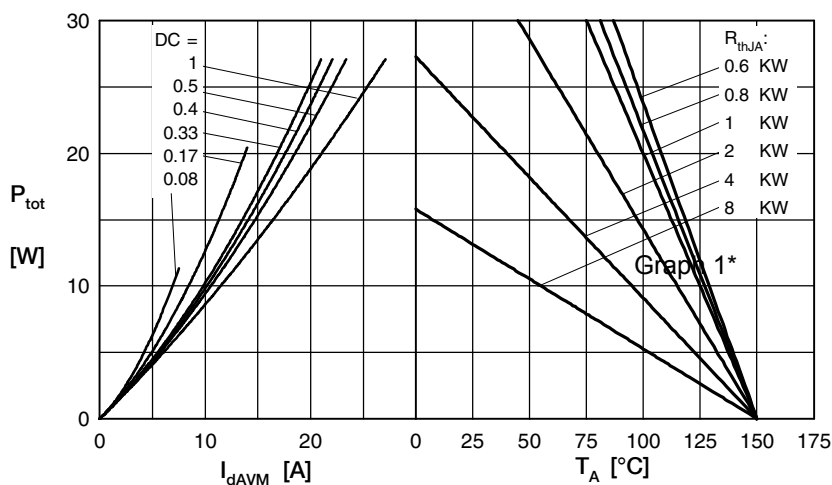


Fig. 4 Power dissipation vs. forward current and ambient temperature per diode

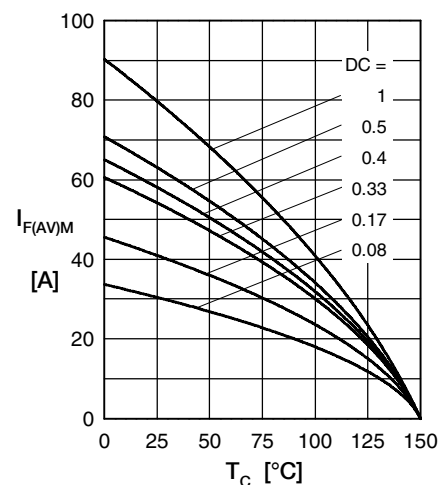


Fig. 5 Max. forward current vs. case temperature per diode

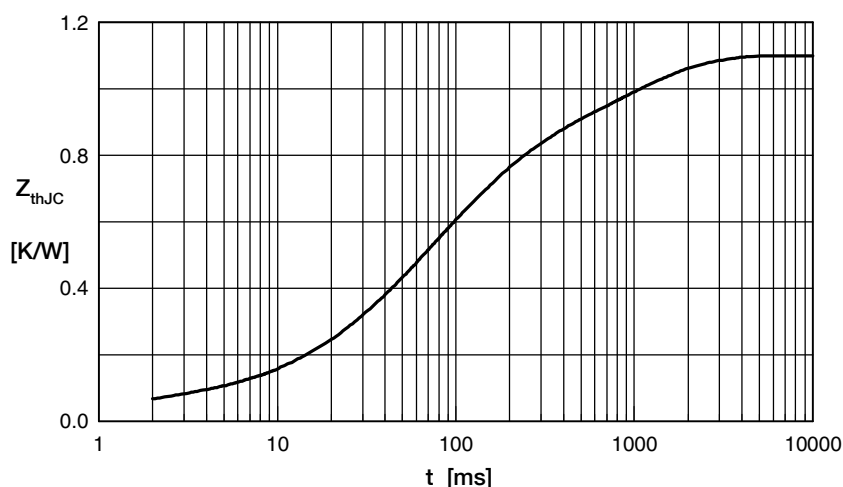


Fig. 6 Transient thermal impedance junction to case vs. time per diode

Constants for  $Z_{thJC}$  calculation:

| i | $R_{th}$ (K/W) | $t_i$ (s) |
|---|----------------|-----------|
| 1 | 0.05           | 0.001     |
| 2 | 0.14           | 0.030     |
| 3 | 0.25           | 0.060     |
| 4 | 0.35           | 0.130     |
| 5 | 0.31           | 0.920     |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[VUO64-16NO7](#)