





SMT POWER INDUCTORS

Unshielded Drum Core - PA0390NL Series



-  **Height:** 5.1mm Max
-  **Footprint:** 8.89mm x 6.10mm Max
-  **Current Rating:** up to 6.0A
-  **Inductance Range:** 0.6 μ H to 113 μ H


Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C

Part ^{6,7} Number	Inductance @ I _{RK} A _{DC} (μ H \pm 20%)	I _{rated} ⁵ (A)	DCR (MAX) (m Ω)	Saturation Current (A) @ 25°C	Heating Current (A)
PA0390.471NL	0.6	6	9.7	7.7	6
PA0390.102NL	1.2	4.4	17.7	5.3	4.4
PA0390.152NL	1.6	4.2	20	4.5	4.2
PA0390.222NL	2.6	3.1	36.3	3.5	3.1
PA0390.332NL	3.8	2.9	42.8	3	2.9
PA0390.472NL	5.2	2.2	54.4	2.6	2.2
PA0390.682NL	6.9	1.7	89.7	2.2	1.7
PA0390.103NL	11	1.5	110.7	1.9	1.5
PA0390.153NL	16	1.2	174.7	1.5	1.2
PA0390.223NL	23	1	254.1	1.2	1
PA0390.333NL	36	0.82	367	0.99	0.82
PA0390.473NL	48	0.72	474	0.87	0.72
PA0390.683NL	73	0.58	732	0.67	0.58
PA0390.104NL	113	0.47	1109	0.53	0.47

- NOTES:**
- The temperature of the component (ambient plus temperature rise) must be within the specified operating temperature range.
 - Inductance tested at 100kHz, 250mV_{RMS}
 - Inductance drop = 10% typical at the Saturation Current.
 - $\Delta T = 40^\circ\text{C}$ rise typical at the Heating Current
 - The rated current is the lower of the saturation or heating current.
 - Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA0390.102NL becomes PA0390.102NLT). Pulse complies to industry standard tape and reel specification EIA481.
 - The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.

Mechanical

Schematic

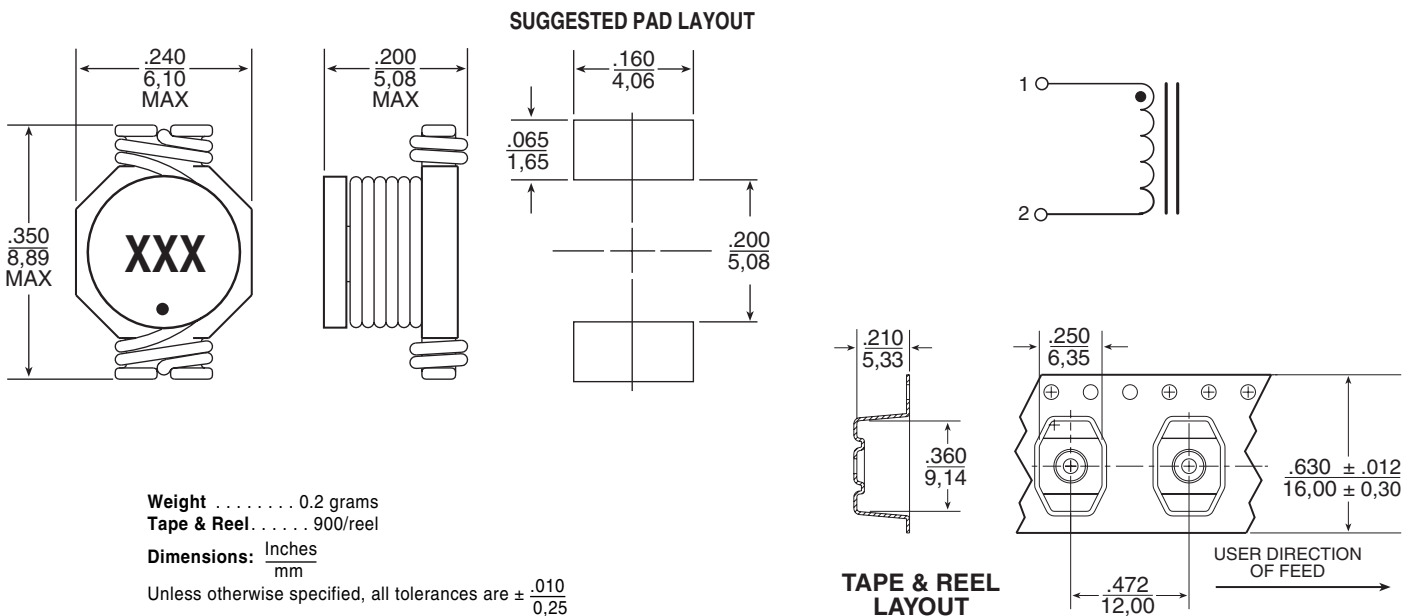

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PA0390.102](#) [PA0390.103](#) [PA0390.103T](#) [PA0390.104](#) [PA0390.152](#) [PA0390.153](#) [PA0390.222](#) [PA0390.223](#)
[PA0390.223T](#) [PA0390.332](#) [PA0390.333](#) [PA0390.471](#) [PA0390.472](#) [PA0390.472T](#) [PA0390.473](#) [PA0390.682](#)
[PA0390.683](#) [PA0390.102NLT](#) [PA0390.103NLT](#) [PA0390.471NLT](#) [PA0390.472NLT](#) [PA0390.473NLT](#) [PA0390.471T](#)