

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

MAR .1992.

© COPYRIGHT 1992 By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN

APVD

G3

REVISED PER ECR-11-024209

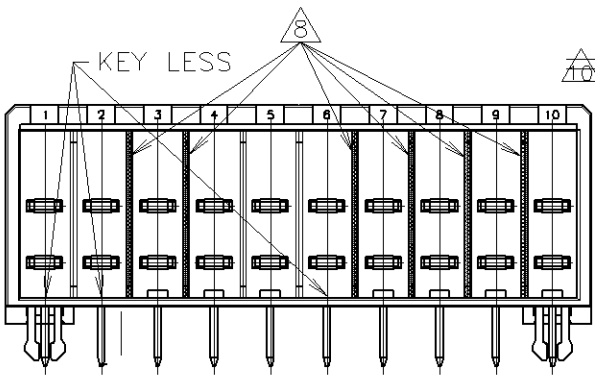
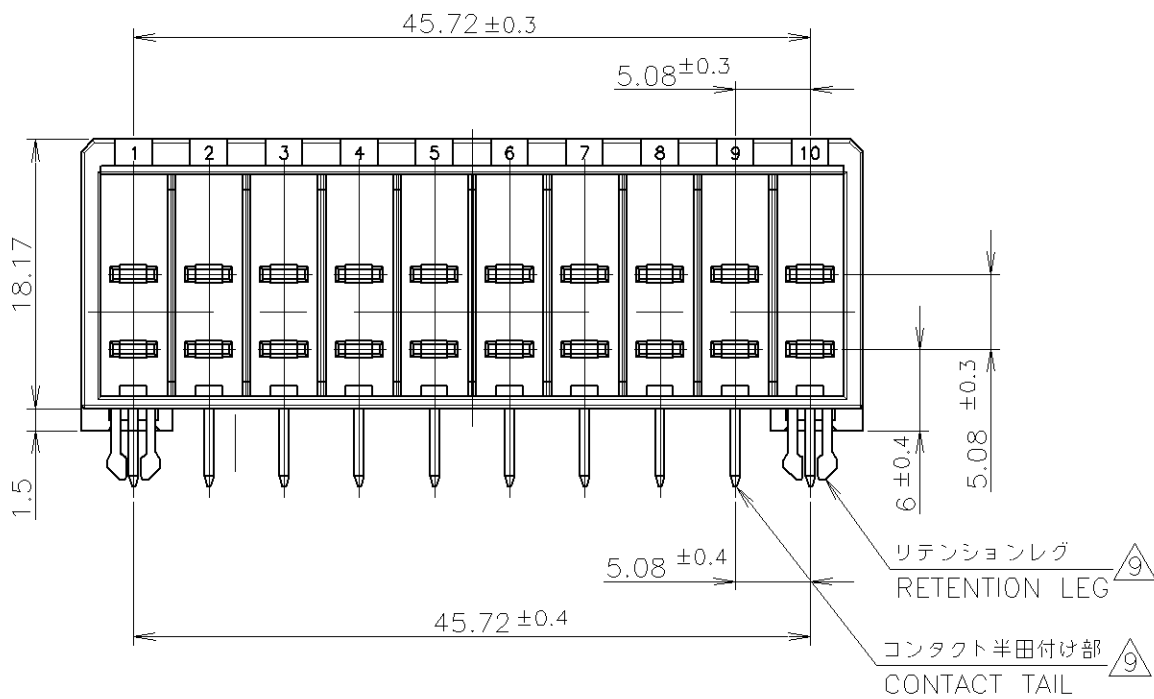
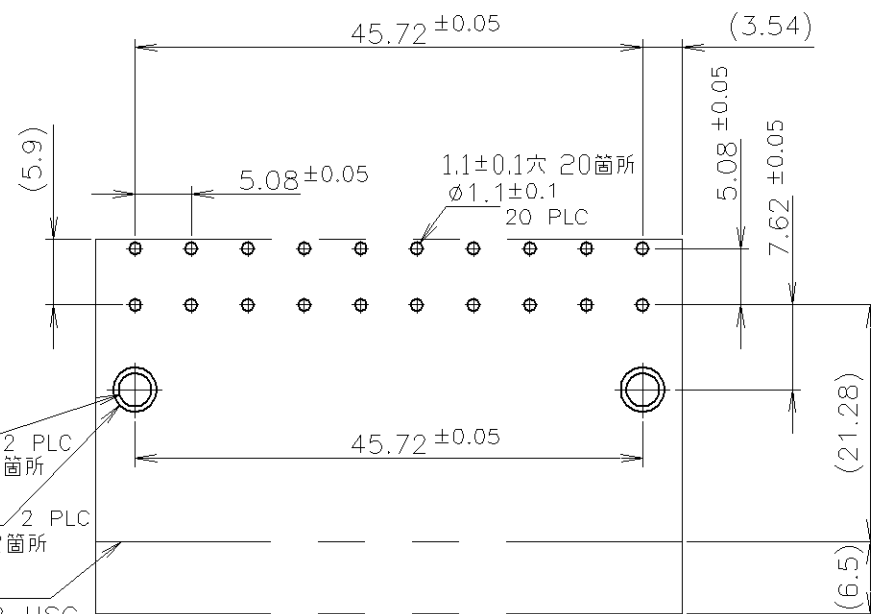
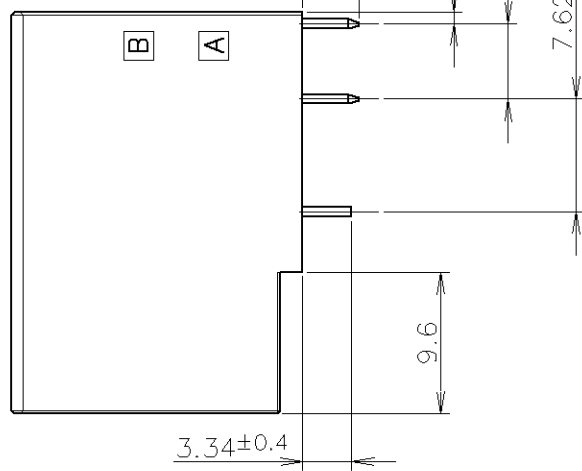
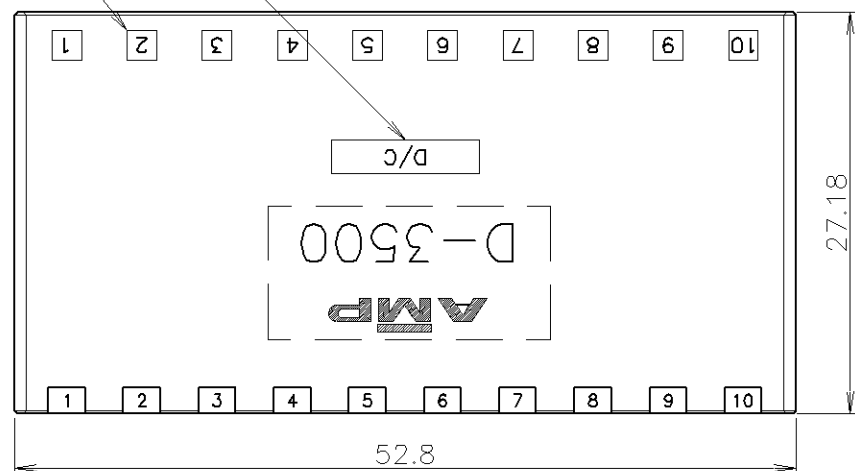
30NOV11

H.U

N.Y

CIRCUIT NO.

DATE CODE (HOT MARKING)

3-175365-2 のみ
ONLY 3-175365-2


10	OBSOLETE	9	4	3-175365-2	8
		9	6	175365-5	
		9	5	175365-3	
		9	4	175365-2	
				型番 PART NUMBER	マーキング MARKING

GENERAL TOLERANCE
一般公差10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES: ±3°

- 材料 ; 熱可塑性ポリエステル樹脂(ガラス入り)
色 ; 黒
- 製品規格 ; 108-5349
- 製品認定報告書 ; 501-5013
- 接触部仕上 ; ニッケル下地0.38μMIN.金めっき
- 接触部仕上 ; ニッケル下地0.76μMIN.金めっき
- 接触部仕上 ; ニッケル下地2.0μMIN.すずめっき
- レグおよび脚部仕上 ; ニッケル下地半田めっき
- 6箇所マーキング、白
- レグおよび脚部仕上 ; ニッケル下地すずめっき

- MATERIAL; GLASS FIELD THERMO PLASTIC, POLYESTER.
COLOR; BLACK
- PRODUCT SPEC; 108-5349
- QUALIFICATION TEST REPORT; 501-5013
- FINISH (CONTACT AREA); 0.38u MIN. GOLD PLT. OVER NICKEL.
- FINISH (CONTACT AREA); 0.76u MIN. GOLD PLT. OVER NICKEL.
- FINISH (CONTACT); 2.0u MIN. TIN PLT. OVER NICKEL.
- FINISH (RETENTION LEG AND CONTACT TAIL);
TIN-LEAD PLT. OVER NICKEL.
- 6 PLACES MARKING, WHITE
- FINISH (RETENTION LEG AND CONTACT TAIL); TIN PLT. OVER NICKEL.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mmTOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差MATERIAL
材料SEE NOTE
注記参照0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±FINISH
仕上

DWN 18MAR1992

T.YONEBAYASHI

CHK S.MANABE

APVD 07APR1992

S.MANABE

PRODUCT SPEC

製品規格

APPLICATION SPEC

取付適用規格

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

名称

DYNAMIC D-3500
20 POS HDR ASSY

SIZE

CAGE CODE

DRAWING NO

番号

A300779

C-175365

RESTRICTED TO

—

SCALE
尺度 2:1

SHEET

1 OF 1

REV

G3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[175365-3](#)