

UNCONTROLLED DOCUMENT



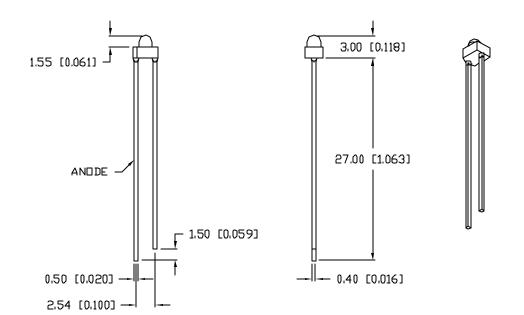

PART NUMBER SSL-LX20333GD

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	CORRECTED DIMS, SOLDER SPES.	B.1.94
В	UPDATED SPECS.	7.7.95
С	E.C.N. #10317.	3.4.97
D	E.C.N. #108RDR. & REDRAWN.	7.2.98
E	E.C.N. #10695.	4.9.01

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA							
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND		
PEAK WAVELENGTH		565		nm			
FORWARD VOLTAGE		2.2	2,6	V_f			
reverse voltage	5.0			٧r	I _r =100μΑ		
AXIAL INTENSITY		20		mcd	$I_f = 20 \text{mA}$		
VIEWING ANGLE		70		2x theta			
EMITTED COLOR:	GREEN						
EPOXY LENS FINISH:	GREEN D	XFFUSED					

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	m A
POWER DISSIPATION	105	mW
DERATE FROM 25°C	– 1. 6	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	•c
SOLDERING TEMP.	+ 260	.c
2.0mm FROM BODY		3 SEC. MAX

^{*} t<10µS

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.000), NIN= +0.000 |

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.000), NIN= +0.000 |

**UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.000), NIN= +0.000 |

**UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), LEAD LENGTH=±0.75 (±0.000), NIN= +0.000 |

**UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.000), XXX=±0.127 (±0

E SSL-LX20333GD

T-1.8mm STOVEPIPE LED, 565nm GREEN LED, GREEN DIFFUSED LENS. CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECEFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEP LI INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THROE PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WFB: www.lumex.com

US WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 7.7.95
PAGE: 1 OF 1
BC SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX20333GD