

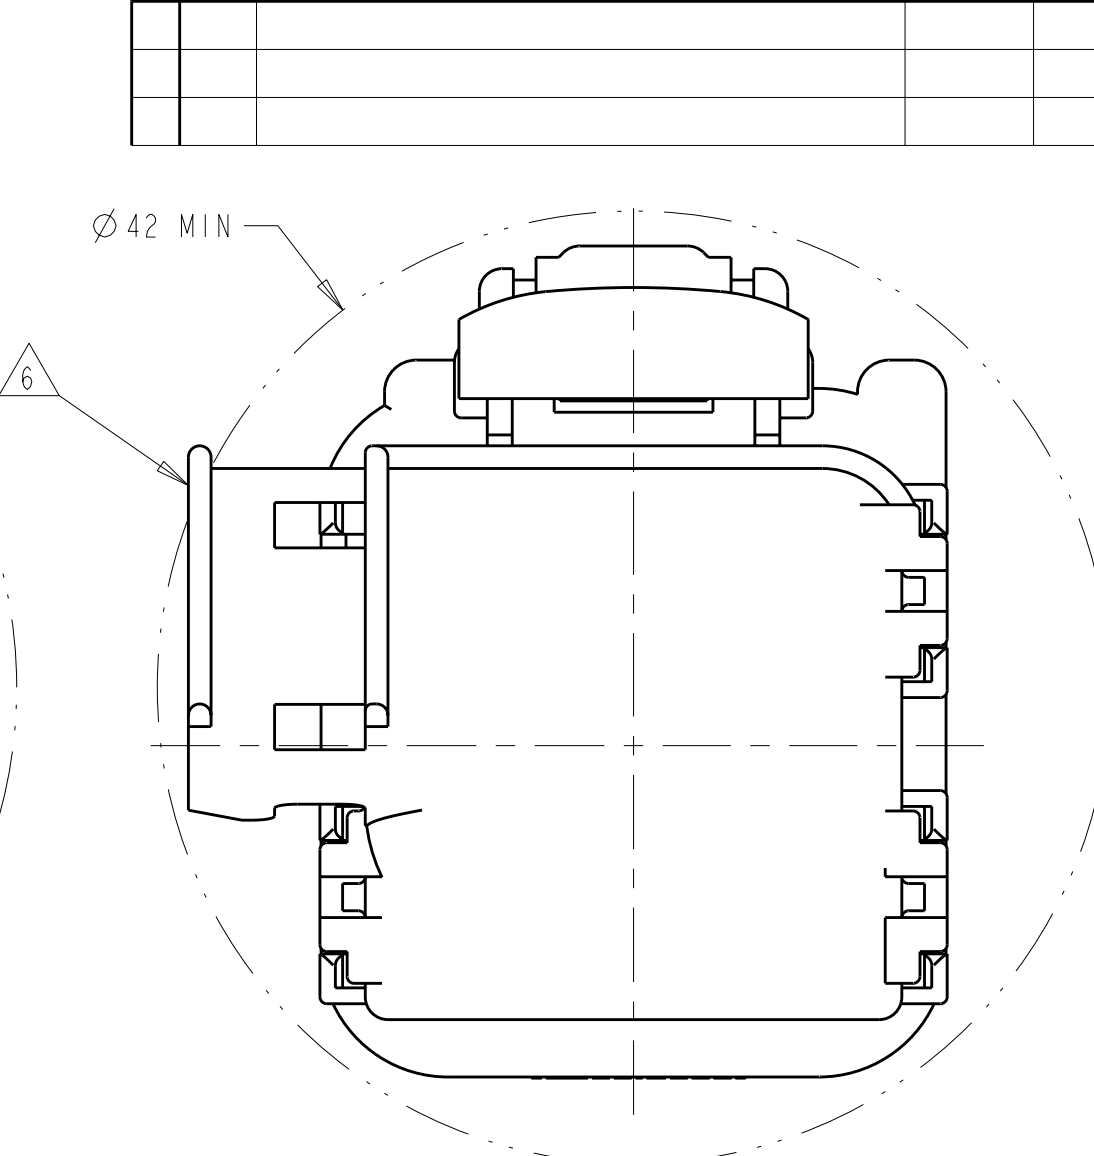



OPTION "F"

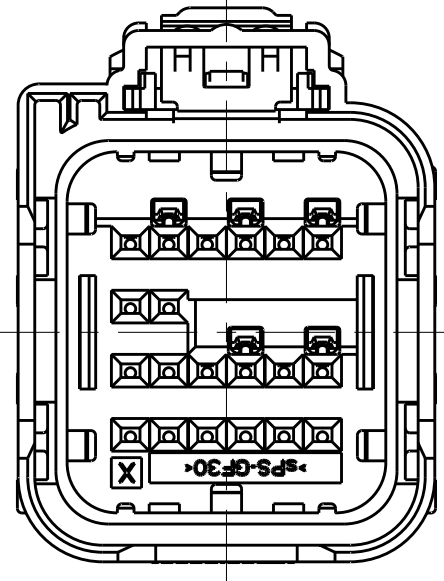

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

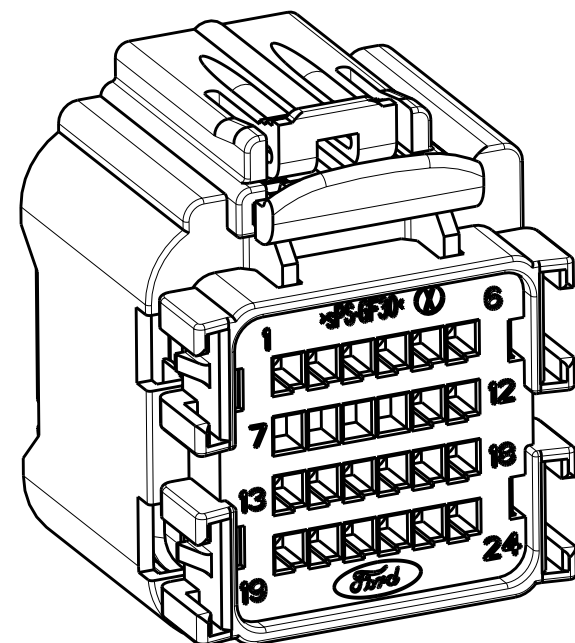

SCALE 2:1

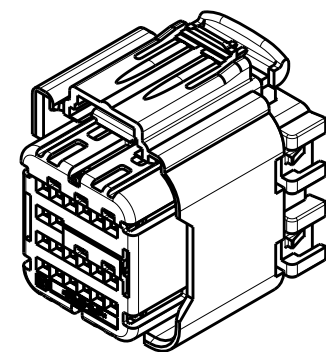

KEYING OPTION "A" SHOWN

Prof/ENGINEER DRAWING

					7	8	9	10	11						17	18					23		Y	3-1924672-0	KEY B	
					7	8	9	10	11						17	18					23		Y	2-1924672-9	KEY A	
					7	8	9	10														Y		2-1924672-8	KEY B	
			5	6	7	8	9	10							17	18	19				23	24	Y	2-1924672-7	KEY A	
			5	6	7	8	9	10							17	18	19	20			23	24	Y	2-1924672-6	KEY A	
					7	8	9	10							17	18		20	21	22			Y	2-1924672-5	KEY A	
					7	8	9	10					15		18		20				23	24	Y	2-1924672-4	KEY A	
					7	8	9	10					15		18						23	24	Y	2-1924672-3	KEY A	
			5	6	7	8	9	10			13	14			17	18	19				23	24	Y	2-1924672-2	KEY A	
			5	6	7	8	9	10			13	14			17	18	19	20			23	24	Y	2-1924672-1	KEY A	
			5	6	7	8	9	10			13	14	15		17	18			21		23		Y	2-1924672-0	KEY A	
					7	8	9	10					15		17	18					23	24	Y	1-1924672-9	KEY A	
					7	8	9	10					15		17	18				21		23	24	Y	1-1924672-8	KEY A
					7	8	9	10								18	19		21		23	24	Y	1-1924672-7	KEY A	
					7	8	9	10								18	19				23	24	Y	1-1924672-6	KEY A	

[illegible]

PLUG
KEYING OPTION

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1924672-0](#)