
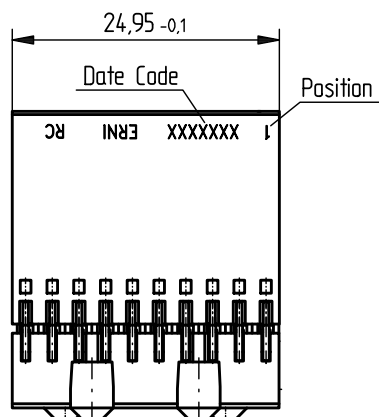



h
g
f
e
d
c
b
a

10 1


■ = bestückt - assembled

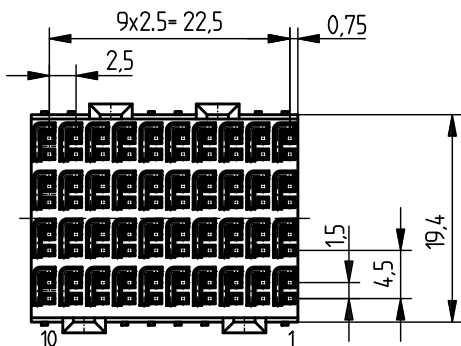

Board hole pattern
(Component mounting side)

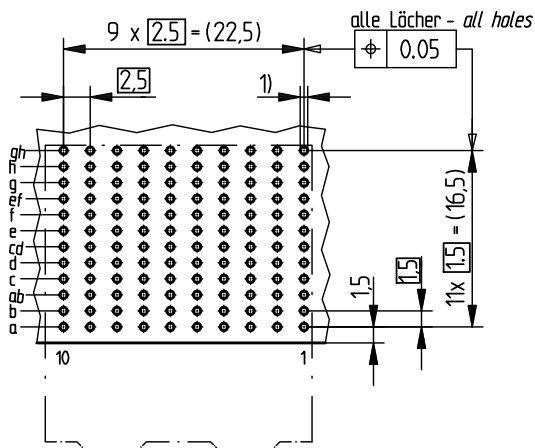

EE-Zone für durchkontaktierte
Löcher $\varnothing 0.6 \pm 0.05$
*compliant zone for through hole
 $\varnothing 0.6 \pm 0.05$*

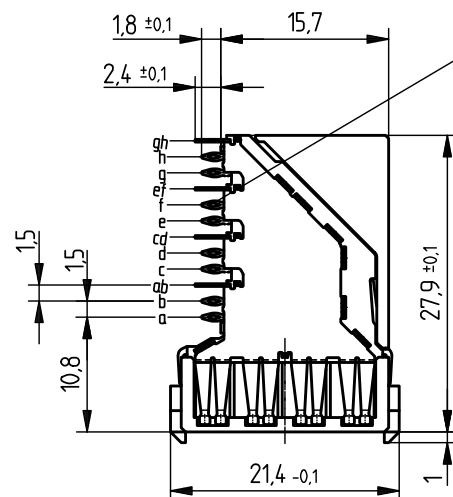

- 1) $\varnothing 0.6 \pm 0.05$ Durchmesser des metallisierten Loches
 $\varnothing 0.6 \pm 0.05$ Diameter of finished plated-through hole
 $\varnothing 0.7 \pm 0.02$ Bohrungsdurchmesser des Loches
 $\varnothing 0.7 \pm 0.02$ Diameter of drilled hole

Schichtaufbau im metallisierten Loch
siehe Zeichnung 114406

*Metal plating of plated-through hole
see drawing 114406*

Information: Anforderungsstufe 237 / class 237	Tolerances  All Dimensions in mm		Scale 2:1	
	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Designation ERmetZD Federleiste 4-10 <i>ERmetZD Fem. Connector 4-10</i>	
	Subject to modification without prior notice. Drawing will not be updated.			
	 www.ERNI.com		973032	
c Index	29.09.2009 Date	M:00068447.SZA	ERMZD	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[973032](#)