

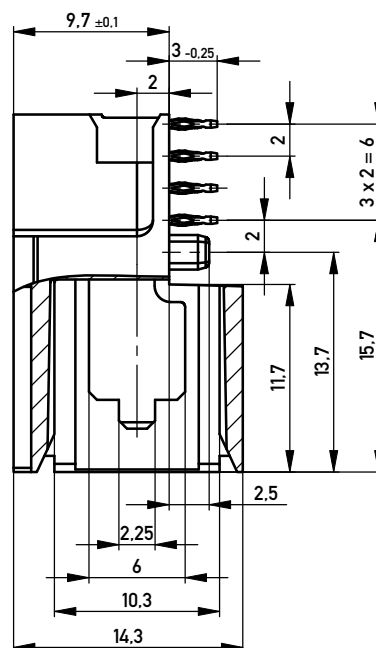
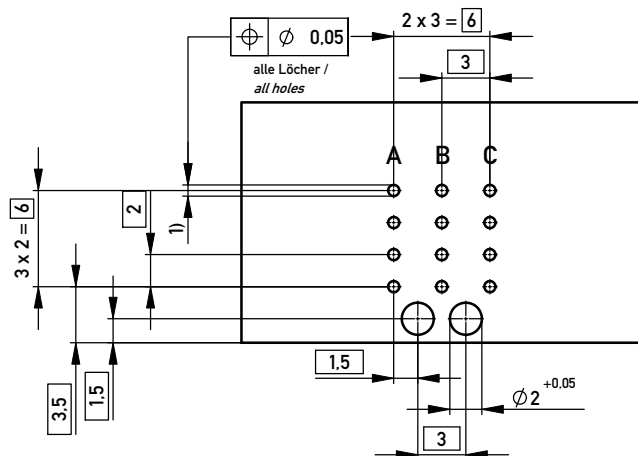



L = lang / *long*
M = mittel / *middle*
S = kurz / *short*

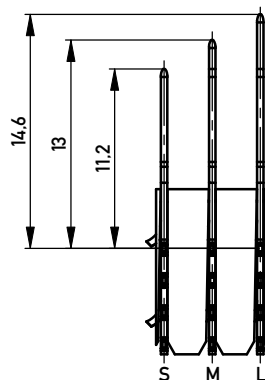

1) $\phi 0,6 \pm 0,05$ Durchmesser des metallisierten Loches
 $\phi 0,6 \pm 0,05$ Diameter of finished plated-through hole

Schichtaufbau im metallisierten Loch siehe
Zeichnung 114406 / 164062 Nr.1
*Metal plating of plated-through hole see
drawing 114406 / 164062 No.1*




M 1:5


verpackt in Tray
VPE: 72 St.

tray packaging
packaging unit 72 pcs.

Bestückungsplan /
contact layout

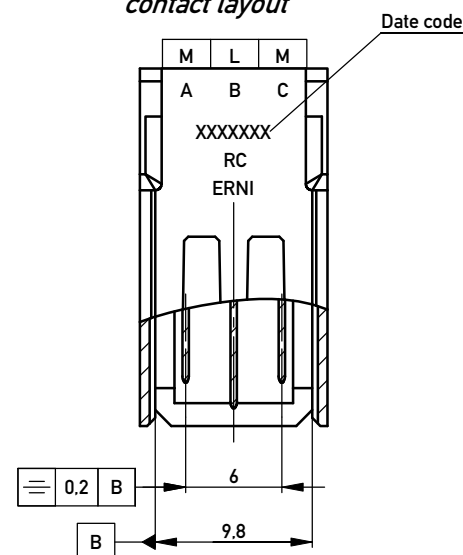

DETAIL A
MAßSTAB 1 : 1



Gehäuse / *housing*: PBTP grau 30% GF / *PBTP grey 30% GF*
 Kontakte / *contacts*: Phosphor Bronze / *phosphor bronze*

Oberflächenbeschichtung / *plating*:
 Kontaktbereich / *mating area*: 0,65µm PdNi, 0,1µm Au
 Anschlussbereich / *termination*: 1,5-3µm Ni, 0,5-2µm Sn matt

Anforderungsstufe 2 / class 2

Copyright by ERNI GmbH.
Proper care notice pursuant to ISO 16016 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale		3:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation ERmet Messerleiste PM 14,3 <i>ERmet Male PM 14,3</i>					
				ERNI				www.ERNI.com				114402	
k				19.11.2010				I					
Index				Date				A3					
								Class				ERMPM	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[114402](#)