

**JZV SERIES****105°C Low Impedance, High Temperature Reflow Soldering**


- Load Life : 105°C 2000 hours.
- AEC-Q200.

RoHS  
compliance**◆SPECIFICATIONS**

Items	Characteristics																													
Category Temperature Range	−55~+105°C																													
Rated Voltage Range	6.3~35Vdc																													
Capacitance Tolerance	±20% (20°C, 120Hz)																													
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater. (After 2 minutes application of rated voltage) I=Leakage Current(μA)      C=Capacitance(μF)      V=Rated Voltage(Vdc)																													
Dissipation Factor(MAX) (tanδ)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <td>tanδ</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </table> (20°C, 120Hz)						Rated Voltage (Vdc)	6.3	10	16	25	35	tanδ	0.26	0.19	0.16	0.14	0.12												
Rated Voltage (Vdc)	6.3	10	16	25	35																									
tanδ	0.26	0.19	0.16	0.14	0.12																									
Endurance	<p>After applying rated voltage with rated ripple current for 2000 hours at 105°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±30% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>						Capacitance Change	Within ±30% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.																		
Capacitance Change	Within ±30% of the initial value.																													
Dissipation Factor	Not more than 200% of the specified value.																													
Leakage Current	Not more than the specified value.																													
Low Temperature Stability	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <td>Z(−25°C)/Z(20°C)</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(−40°C)/Z(20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>Z(−55°C)/Z(20°C)</td> <td>4</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table> (120Hz)						Rated Voltage (Vdc)	6.3	10	16	25	35	Z(−25°C)/Z(20°C)	2	2	2	2	2	Z(−40°C)/Z(20°C)	3	3	3	3	3	Z(−55°C)/Z(20°C)	4	4	4	3	3
Rated Voltage (Vdc)	6.3	10	16	25	35																									
Z(−25°C)/Z(20°C)	2	2	2	2	2																									
Z(−40°C)/Z(20°C)	3	3	3	3	3																									
Z(−55°C)/Z(20°C)	4	4	4	3	3																									
Impedance Ratio(MAX)																														

**◆MULTIPLIER FOR RIPPLE CURRENT**

	Frequency(Hz)	120	1k	10k	100k≤
Coefficient	4.7μF	0.30	0.60	0.80	1.00
	10~47μF	0.32	0.75	0.90	1.00
	100μF	0.50	0.80	0.95	1.00
	220~1000μF	0.60	0.85	0.95	1.00

**◆MARKING**

## ※Voltage Code


Rated Voltage (Vdc)	6.3	10	16	25	35
Rated Voltage code	j	A	C	E	V

**◆PART NUMBER**

□□□ Rating Voltage — JZV Series — □□□□□ Capacitance — M Capacitance Tolerance — □□□ Option — D×L Case Size

## ◆DIMENSIONS

(mm)

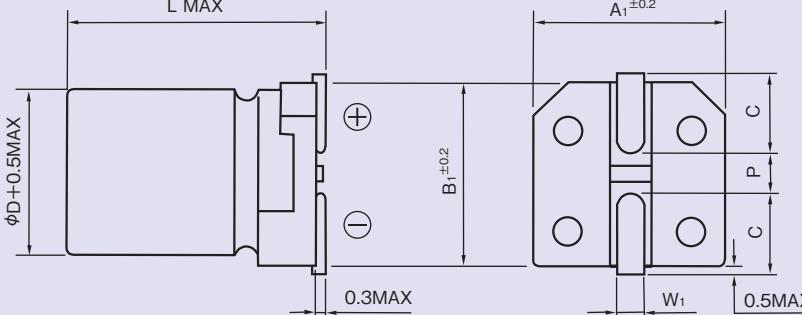

$\phi D$	L	A1	B1	C	W1	P
4	6.1	4.3	4.3	1.8	0.5~0.8	1.0
5	6.1	5.3	5.3	2.2	0.5~0.8	1.3
6.3	6.1	6.6	6.6	2.7	0.5~0.8	1.8
6.3	8	6.6	6.6	2.7	0.5~0.8	1.8
8	10.5	8.3	8.3	2.9	0.8~1.1	3.1
10	10.5	10.3	10.3	3.2	0.8~1.1	4.5

◆STANDARD SIZE Size  $\phi D \times L$ (mm), Rated Ripple Current (mA r.m.s./105°C, 100kHz), Impedance(Ω MAX/20°C, 100kHz)

Vdc	Cap ( $\mu F$ )	Size ( $\phi D \times L$ )	Ripple	Impedance	Vdc	Cap ( $\mu F$ )	Size ( $\phi D \times L$ )	Ripple	Impedance
6.3	22	4×6.1	90	1.35	25	33	5×6.1	170	0.70
	47	4×6.1	90	1.35		6.3×6.1	250	0.36	
		5×6.1	170	0.70		47	6.3×6.1	250	0.36
	100	5×6.1	170	0.70		100	6.3×8	300	0.34
		6.3×6.1	250	0.36		220	8×10.5	600	0.16
	220	6.3×6.1	250	0.36		330	8×10.5	600	0.16
		6.3×8	300	0.34		470	10×10.5	850	0.09
	330	6.3×8	300	0.34	35	4.7	4×6.1	90	1.45
	1000	8×10.5	600	0.16		10	4×6.1	90	1.45
	10	33	4×6.1	90		5×6.1	170	0.70	
		220	6.3×8	300		5×6.1	170	0.70	
		470	8×10.5	600		6.3×6.1	250	0.36	
		680	8×10.5	600		6.3×6.1	250	0.36	
		1000	10×10.5	850		6.3×8	300	0.34	
16	10	4×6.1	90	1.35	100	6.3×8	300	0.34	
	22	4×6.1	90	1.35		8×10.5	600	0.16	
		5×6.1	170	0.70		220	8×10.5	600	0.16
		33	5×6.1	170		220	8×10.5	600	0.16
	47	5×6.1	170	0.70		330	10×10.5	850	0.09
		6.3×6.1	250	0.36					
	100	6.3×6.1	250	0.36					
		6.3×8	300	0.34					
	220	6.3×8	300	0.34					
	330	8×10.5	600	0.16					
	470	8×10.5	600	0.16					
	680	10×10.5	850	0.08					