
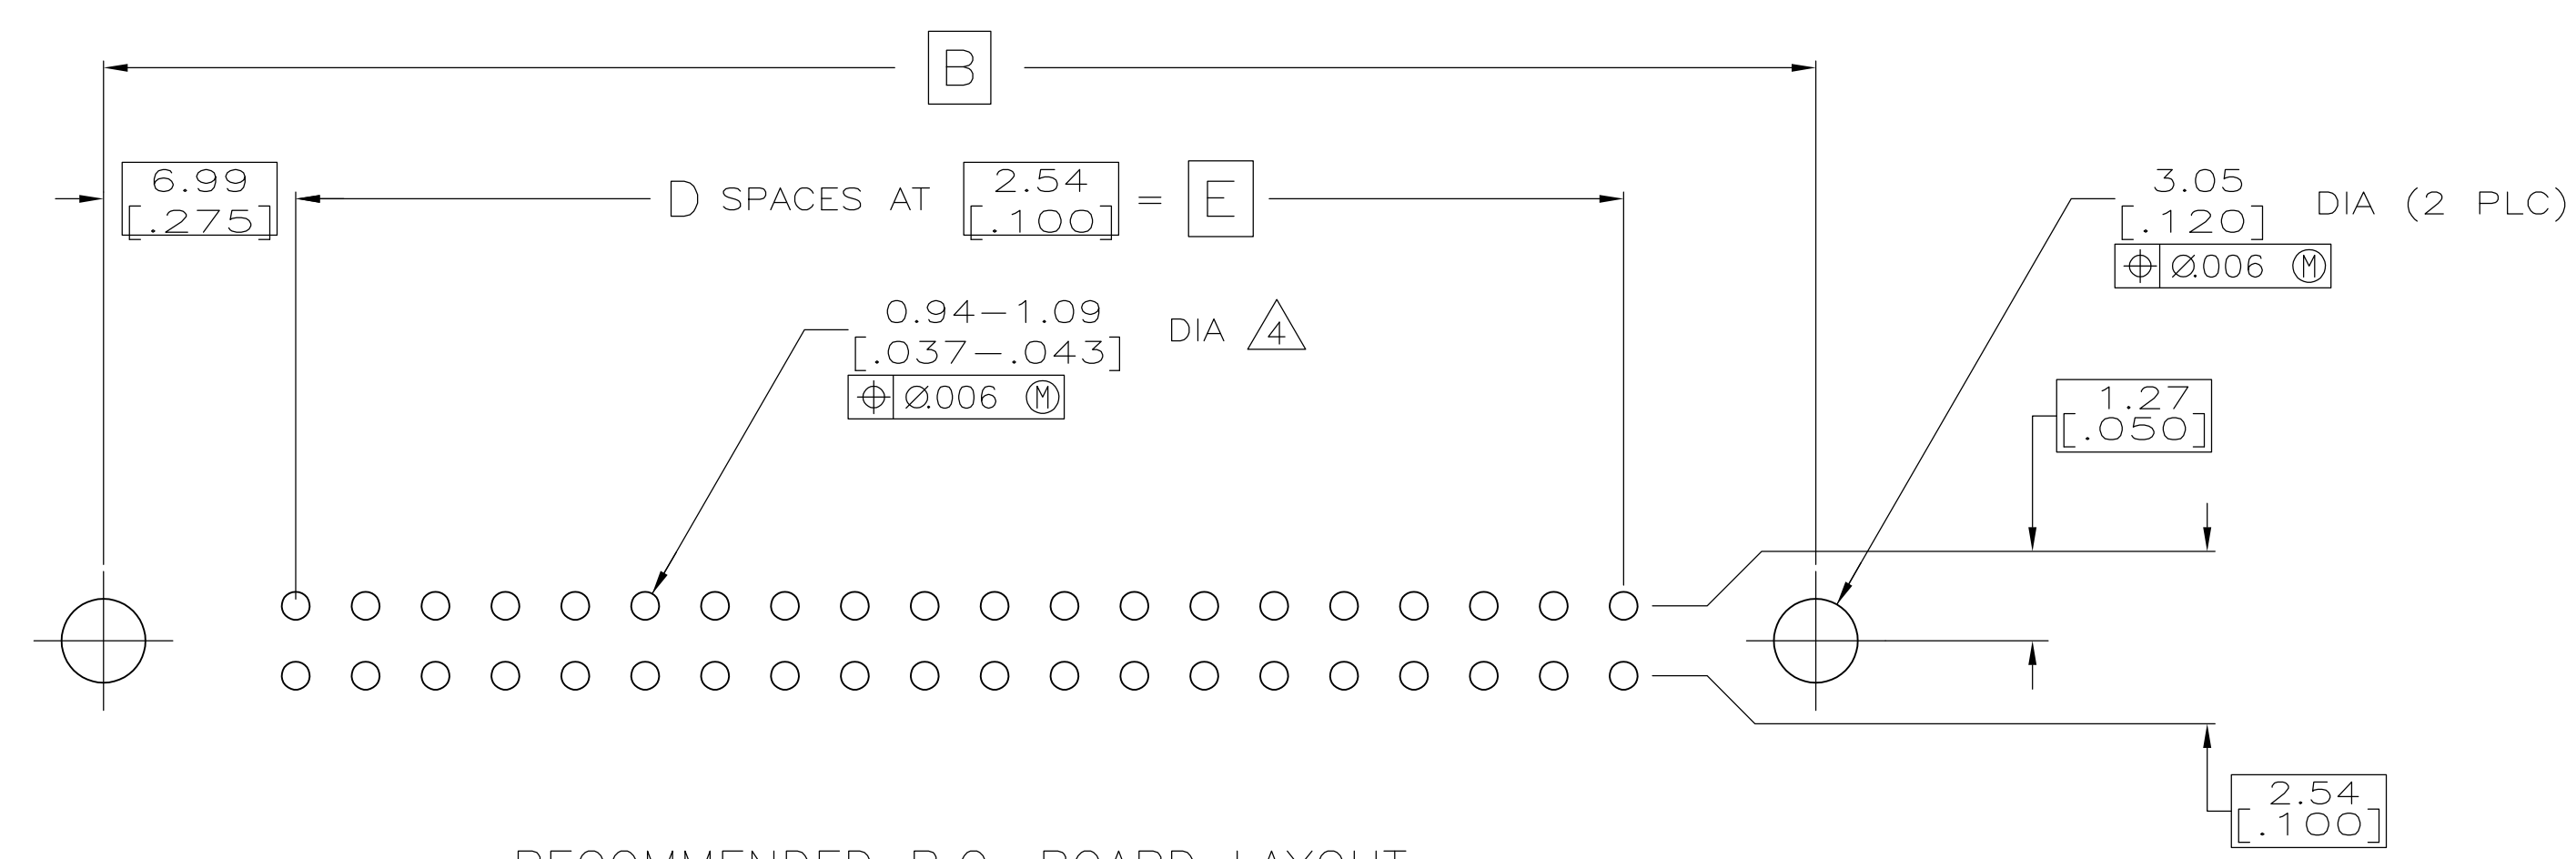
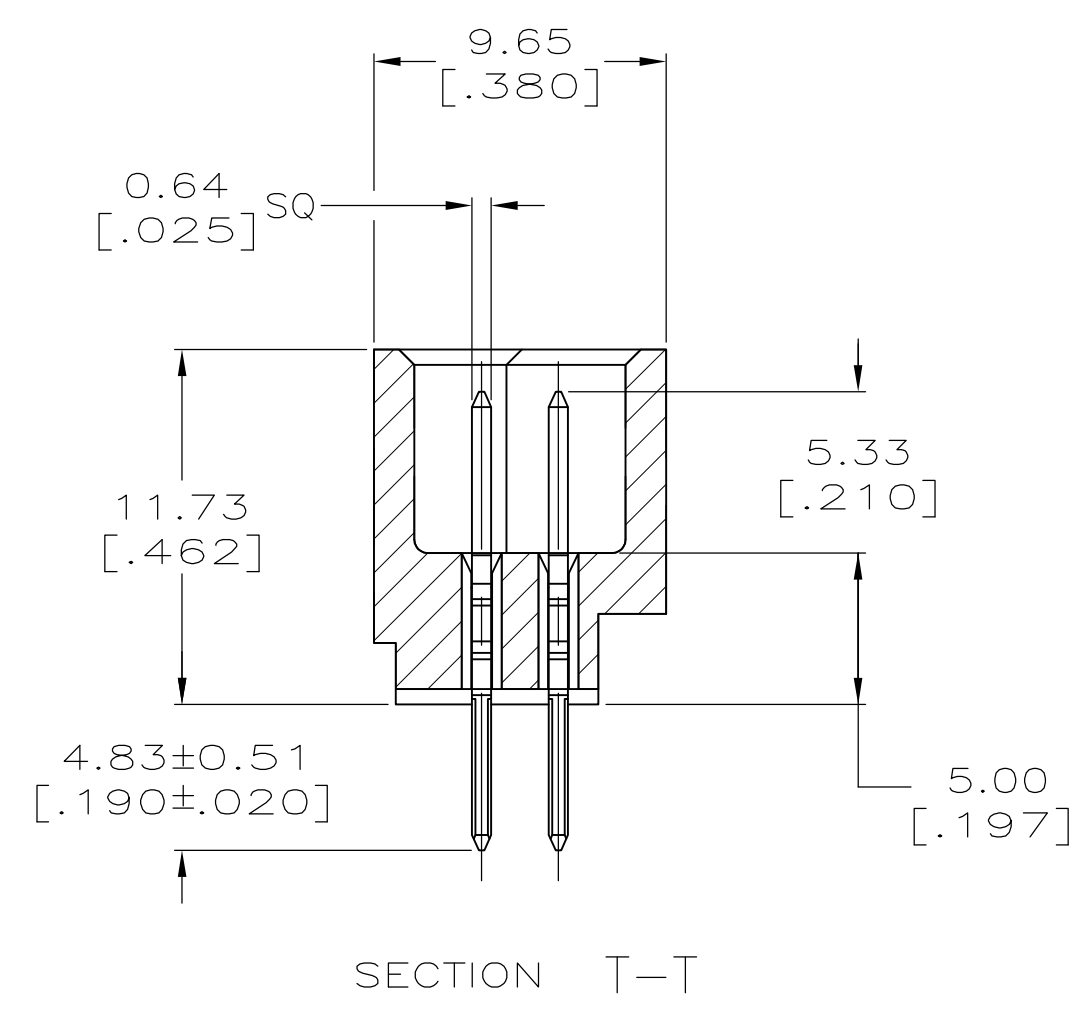
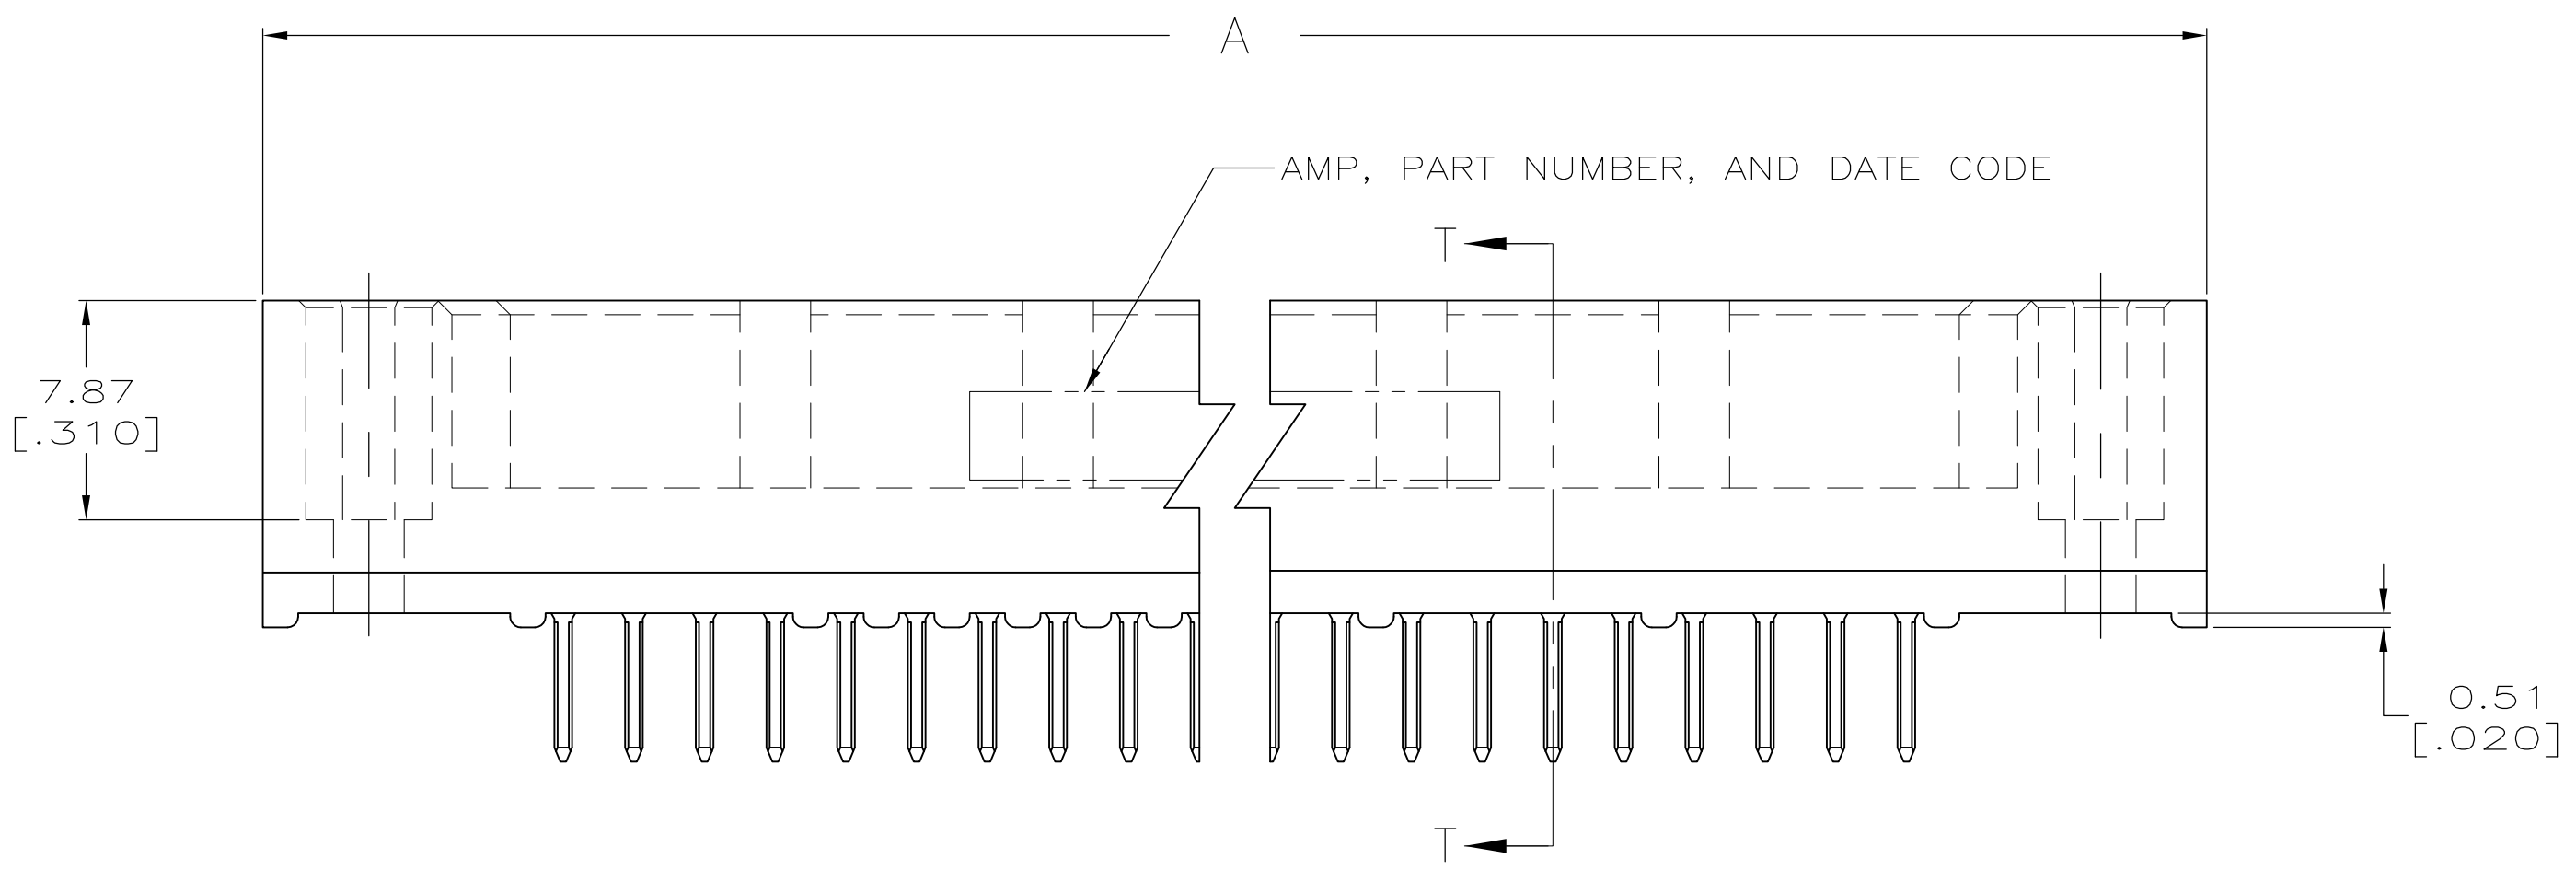


| REVISIONS |           |                       |    |     |     |
|-----------|-----------|-----------------------|----|-----|-----|
| REV       | DATE      | DESCRIPTION           | BY | CHK | APP |
| 1         | 11JUL2016 | REV PER ECO-16-009924 | DS | SY  |     |

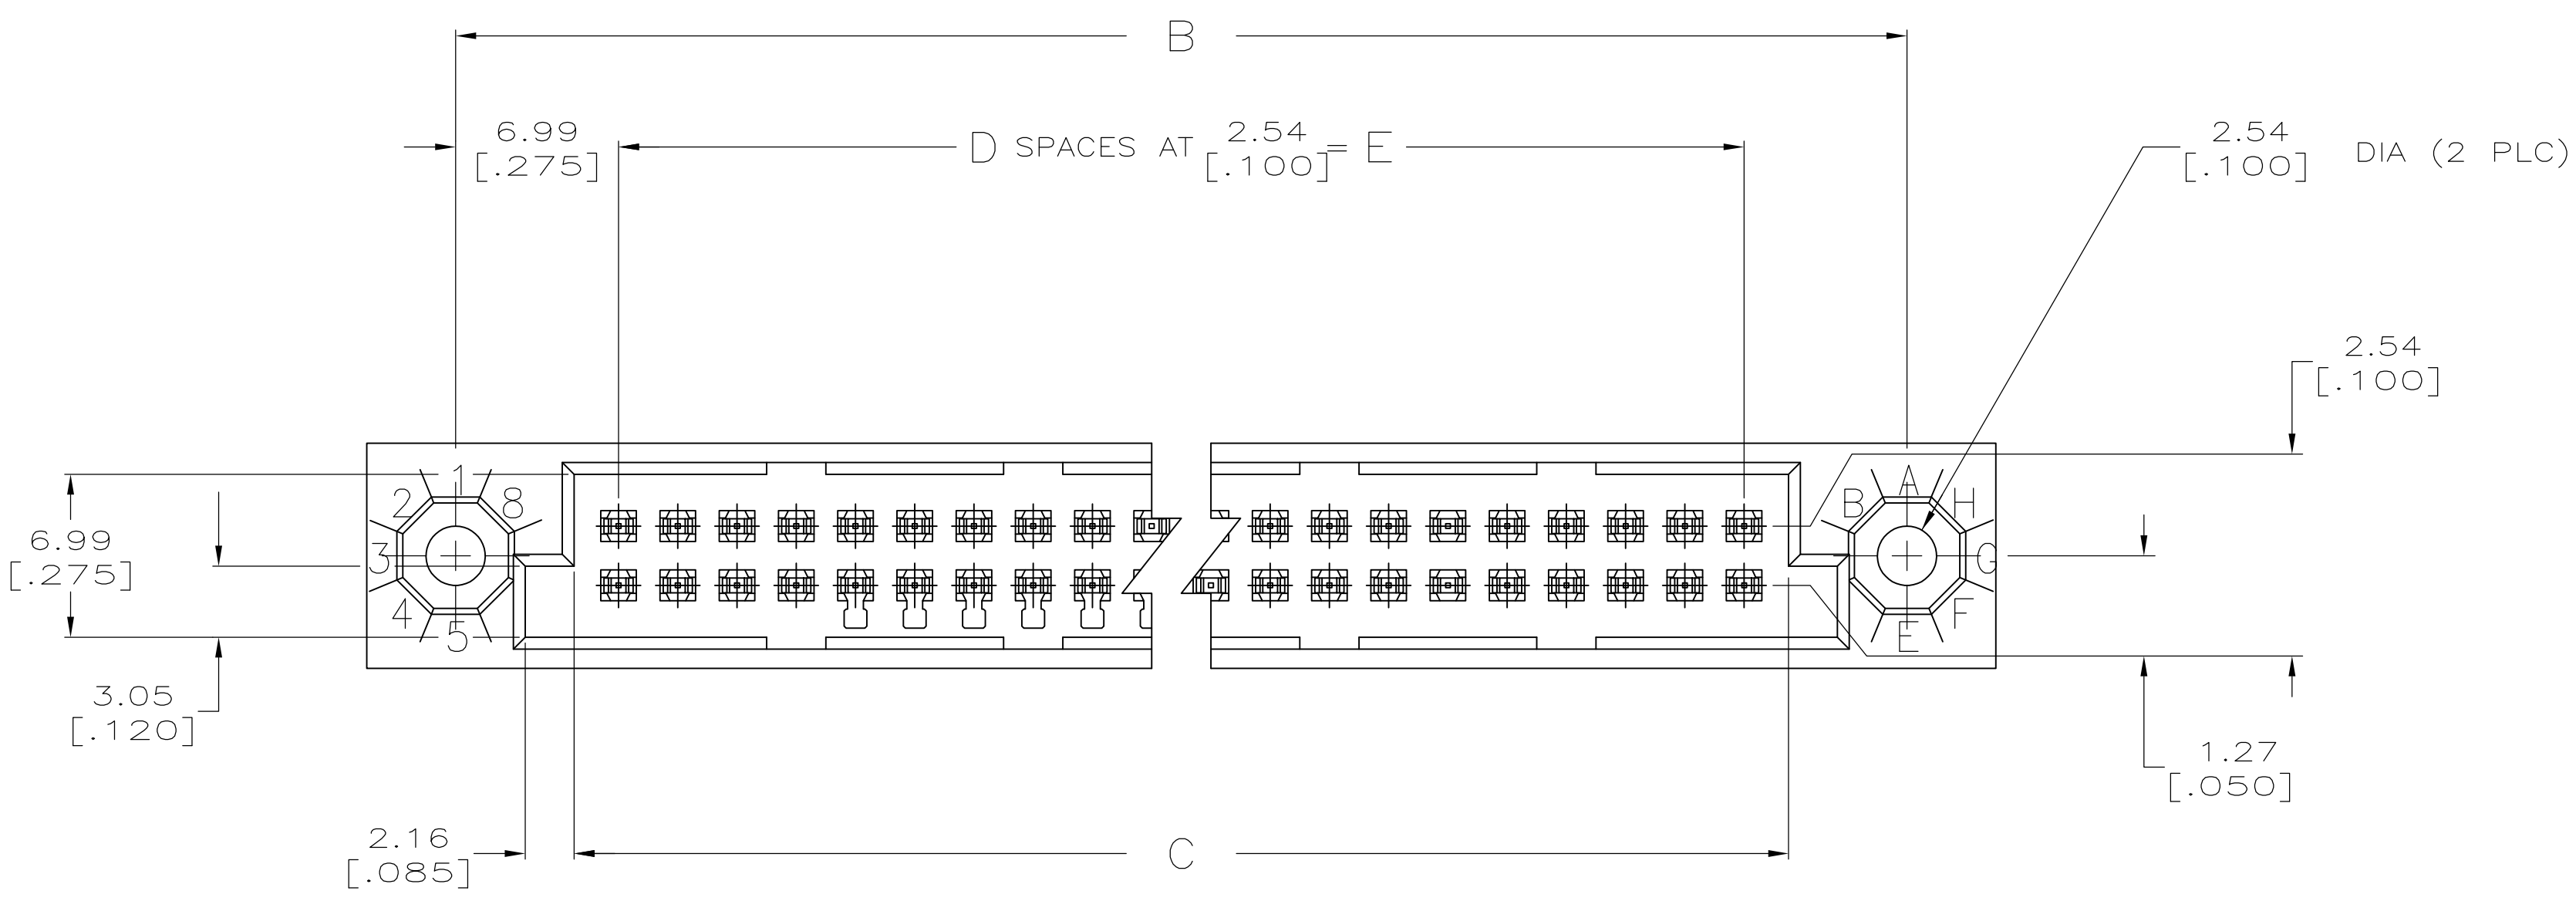

RECOMMENDED P.C. BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN  
R. K. SEIFRIED  
CHK  
F. KIBLER  
APVD  
—

04/09/90  
8-17-92  
—

TE Connectivity

NAME  
HDI, 2 ROW, PIN ASSEMBLY,  
4.83 [.190] LONG SOLDER PINS  
—

DIMENSIONS:  
mm [INCHES]

0 PLC ± —  
1 PLC ± —  
2 PLC ± —  
3 PLC ± 0.13 [.005]  
4 PLC ± —  
ANGLES ± —

1  
2

3

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:

PRODUCT SPEC  
—  
APPLICATION SPEC  
—  
WEIGHT  
0

SIZE  
A1  
CAGE CODE  
00779  
DRAWING NO  
532430

RESTRICTED TO  
—

CUSTOMER DRAWING

SCALE  
4:1

SHEET  
1 OF 2

REV  
R

4805 (1/15)

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|-------------|------|-----|------|
| - | -   | SEE SHEET 1 | -    | -   | -    |

1

HOUSING MATERIAL: THERMOPLASTIC, COLOR-NATURAL.

2

CONTACT MATERIAL: PHOSPHOR BRONZE.

3

FINISH:  
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-9063; BASED ON TELCORDIA DR-1217-CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.  
TIN-LEAD PLATED POSTS.

4

SOLDER PIN POST RECOMMENDED P.C. BOARD HOLE SIZES ARE 0.94-1.09 [.037-.043]; RECOMMENDED PAD DIA IS 1.52 [.060].

5

DIMENSIONS IN BRACKETS ARE IN INCHES.

6

PART NUMBER IS OBSOLETE.

7

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

8

FINISH:  
CONTACT FINISH: .00127-.00254 [.000050-.000100] NICKEL UNDERPLATE ALL OVER; .000762 [.000030] GOLD PLATE IN CONTACT AREA, TIN-LEAD PLATED POSTS.

|   |                   |    |                    |                    |                    |             |            |
|---|-------------------|----|--------------------|--------------------|--------------------|-------------|------------|
| 8 | 124.46<br>[4.900] | 49 | 128.27<br>[5.050]  | 138.43<br>[5.450]  | 146.05<br>[5.750]  | 100         | 3-532430-9 |
| 8 | 73.66<br>[2.900]  | 29 | 77.47<br>[3.050]   | 87.63<br>[3.450]   | 95.25<br>[3.750]   | 60          | 3-532430-5 |
| 6 | 251.46<br>[9.900] | 99 | 255.27<br>[10.050] | 265.43<br>[10.450] | 273.05<br>[10.750] | 200         | 1-532430-9 |
| 6 | 238.76<br>[9.400] | 94 | 242.57<br>[9.550]  | 252.73<br>[9.950]  | 260.35<br>[10.250] | 190         | 1-532430-8 |
| 6 | 226.06<br>[8.900] | 89 | 229.87<br>[9.050]  | 240.03<br>[9.450]  | 247.65<br>[9.750]  | 180         | 1-532430-7 |
| 6 | 213.36<br>[8.400] | 84 | 217.17<br>[8.550]  | 227.33<br>[8.950]  | 234.95<br>[9.250]  | 170         | 1-532430-6 |
| 6 | 200.66<br>[7.900] | 79 | 204.47<br>[8.050]  | 214.63<br>[8.450]  | 222.25<br>[8.750]  | 160         | 1-532430-5 |
|   | 187.96<br>[7.400] | 74 | 191.77<br>[7.550]  | 201.93<br>[7.950]  | 209.55<br>[8.250]  | 150         | 1-532430-4 |
| 6 | 175.26<br>[6.900] | 69 | 179.07<br>[7.050]  | 189.23<br>[7.450]  | 196.85<br>[7.750]  | 140         | 1-532430-3 |
| 6 | 162.56<br>[6.400] | 64 | 166.37<br>[6.550]  | 176.53<br>[6.950]  | 184.15<br>[7.250]  | 130         | 1-532430-2 |
| 6 | 149.86<br>[5.900] | 59 | 153.67<br>[6.050]  | 163.83<br>[6.450]  | 171.45<br>[6.750]  | 120         | 1-532430-1 |
|   | 137.16<br>[5.400] | 54 | 140.97<br>[5.550]  | 151.13<br>[5.950]  | 158.75<br>[6.250]  | 110         | 1-532430-0 |
|   | 124.46<br>[4.900] | 49 | 128.27<br>[5.050]  | 138.43<br>[5.450]  | 146.05<br>[5.750]  | 100         | 532430-9   |
| 6 | 111.76<br>[4.400] | 44 | 115.57<br>[4.550]  | 125.73<br>[4.950]  | 133.35<br>[5.250]  | 90          | 532430-8   |
| 6 | 99.06<br>[3.900]  | 39 | 102.87<br>[4.050]  | 113.03<br>[4.450]  | 120.65<br>[4.750]  | 80          | 532430-7   |
| 6 | 86.36<br>[3.400]  | 34 | 90.17<br>[3.550]   | 100.33<br>[3.950]  | 107.95<br>[4.250]  | 70          | 532430-6   |
|   | 73.66<br>[2.900]  | 29 | 77.47<br>[3.050]   | 87.63<br>[3.450]   | 95.25<br>[3.750]   | 60          | 532430-5   |
| 6 | 60.96<br>[2.400]  | 24 | 64.77<br>[2.550]   | 74.93<br>[2.950]   | 82.55<br>[3.250]   | 50          | 532430-4   |
|   | 48.26<br>[1.900]  | 19 | 52.07<br>[2.050]   | 62.23<br>[2.450]   | 69.85<br>[2.750]   | 40          | 532430-3   |
|   | 35.56<br>[1.400]  | 14 | 39.37<br>[1.550]   | 49.53<br>[1.950]   | 57.15<br>[2.250]   | 30          | 532430-2   |
| 6 | 22.86<br>[.900]   | 9  | 26.67<br>[1.050]   | 36.83<br>[1.450]   | 44.45<br>[1.750]   | 20          | 532430-1   |
| E | D                 | C  | B                  | A                  | POSN               | PART NUMBER |            |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm [INCHES]

0 PLC  
1 PLC  
2 PLC  
3 PLC  
4 PLC

± -  
± -  
± -  
± 0.13 [.005]  
± -

ANGLES  
FINISH

PRODUCT SPEC  
APPLICATION SPEC

SIZE  
WEIGHT

04/09/90  
8-17-92

TE Connectivity

HDI, 2 ROW, PIN ASSEMBLY,  
4.83 [.190] LONG SOLDER PINS

00779532430

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV R

OBSOLETE

4805 (1/15)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-532430-0](#)