

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0855135011

Status:


Active

Overview:

Magnetic and Modular Jacks/Plugs

Description:

Modular Jack, Vertical, Top Entry, Surface Mount, 6/4, Low Profile, 22" Reel

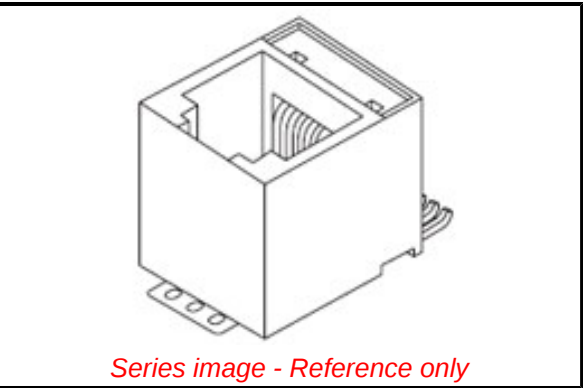

Documents:		
3D Model		Packaging Specification PK-85513-001-002 (PDF)
Drawing (PDF)		Test Summary STR-1425-001 (PDF)
Product Specification PS-85513-002-001 (PDF)		RoHS Certificate of Compliance (PDF)
Application Specification AS-85513-001-001 (PDF)		Product Literature (PDF)
Agency Certification		
UL		E107635
General		
Product Family		Modular Jacks/Plugs
Series		85513
Comments		Reflow Capable, Small Panel Cutout, Reflow Capable, Small Panel Cutout
Component Type		PCB Jack
Magnetic		No
Overview		Magnetic and Modular Jacks/Plugs
Performance Category		3
Power over Ethernet (PoE)		N/A
Product Literature Order No		987650-8441
Product Name		Modular Jack 6/4
UPC		822350833714
Physical		
Boot Color		N/A
Color - Resin		Black
Durability (mating cycles max)		2500
Flammability		94V-0
Inverted / Top Latch		No
Jack Height		12.70mm
Lightpipes/LEDs		None
Material - Metal		Copper Alloy
Material - Plating Mating		Gold over Palladium Nickel
Material - Plating Termination		Tin
Material - Resin		High Temperature Thermoplastic
Net Weight		2.260/g
Orientation		Vertical (Top Entry)
PCB Locator		No
PCB Retention		Yes
Packaging Type		Embossed Tape on Reel
Pitch - Mating Interface		1.02mm
Pitch - Termination Interface		1.27mm
Plating min - Mating		0.051µm, 1.016µm
Plating min - Termination		1.905µm
Port Configuration		1x1
Positions / Loaded Contacts		6/4
Surface Mount Compatible (SMC)		Yes
Temperature Range - Operating		-40° to +85°C
Termination Interface: Style		Surface Mount
Waterproof / Dustproof		No
Wire/Cable Type		N/A

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

ED/71/2019 (16 July

2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

85513 Series

Mates With

90075 Modular Plug

Electrical

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	125V DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	045
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Application Specification	AS-85513-001-001
Packaging Specification	PK-85513-001-002
Product Specification	PS-85513-002-001
Sales Drawing	SD-85513-010
Test Summary	STR-1425-001

This document was generated on 09/18/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[85513-5011](#)