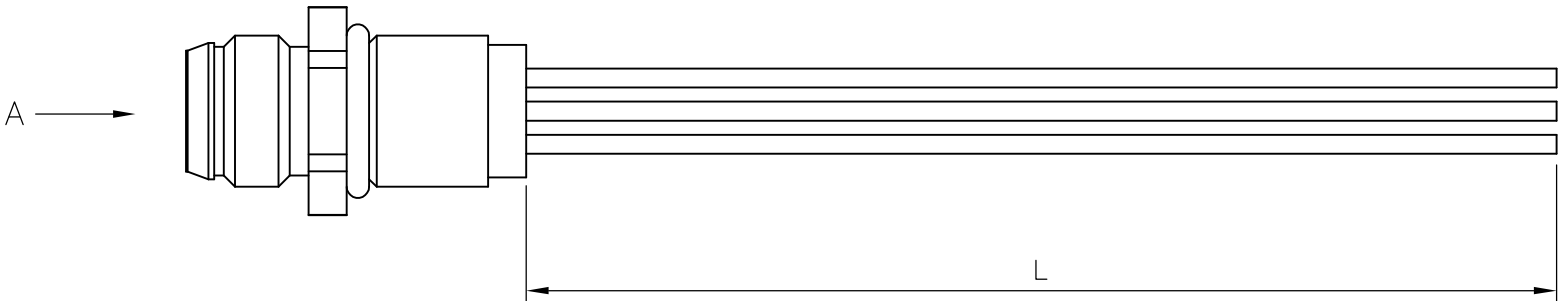




4		3		2		1							
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC		DIST		REVISIONS					
© COPYRIGHT — By —		ALL RIGHTS RESERVED.		H		—		P	LTR	DESCRIPTION	DATE	DWN	APVD
NOTES: Tolerances cable lengths: 0m to 0.5m +30mm 0.5m to 1.0m +50mm 1.0m to 3.0m +100mm < 3.0m +1.5%									A	INITIAL RELEASE	12NOV2013	GSK	BvH
									A1	ECR-15-003371	04MAR2015	GSK	BvH
													
VIEW 'A'													
TECHNICAL DATA													
Operating voltage		max. 30 V AC/DC											
Operating current per contact		max. 4 A											
Locking of ports		Screw thread M8 x 1 mm (recommended torque 0.4 Nm) self-securing											
Protection		IP65 and IP67 when plugged and screwed down (EN 60529)											
Temperature range		-25...+85 °C											
CABLE													
No./diameter of wires		3 x 0.34 mm²											
Wire isolation		PP (br, bk, bl) (UL/CSA)											
Outer diameter		approx. 2.7 mm											
Bend radius (moving)		10 x outer diameter											
Temperature range (fixed)		-40...+80 °C											
Commercial data													
		3 pos		0.2mtr		2273014-1		3X22AWG PANELMOUNT 0.2m WIRES				1	
				LENGTH"L"		TE PN		DESCRIPTION				ITEM	
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN 12NOV2013 SATHISH KUMAR.G		 TE Connectivity							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK 12NOV2013 B.VELDHOVEN									
		0 PLC ± -		APVD 12NOV2013 A.VAN ZANDVOORT		NAME M8 MALE PANEL MLD REAR MT M8 FAST PIGT							
		1 PLC ± -		PRODUCT SPEC									
		2 PLC ± -		108-19483									
3 PLC ± -		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO									
4 PLC ± -		114-32127											
ANGLES ± -		FINISH		WEIGHT		A300779C-2273014							
MATERIAL				-									
CUSTOMER DRAWING				SCALE		NTS		SHEET		1 OF 1		REV	
												A1	

1470-19 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2273014-1](#)