
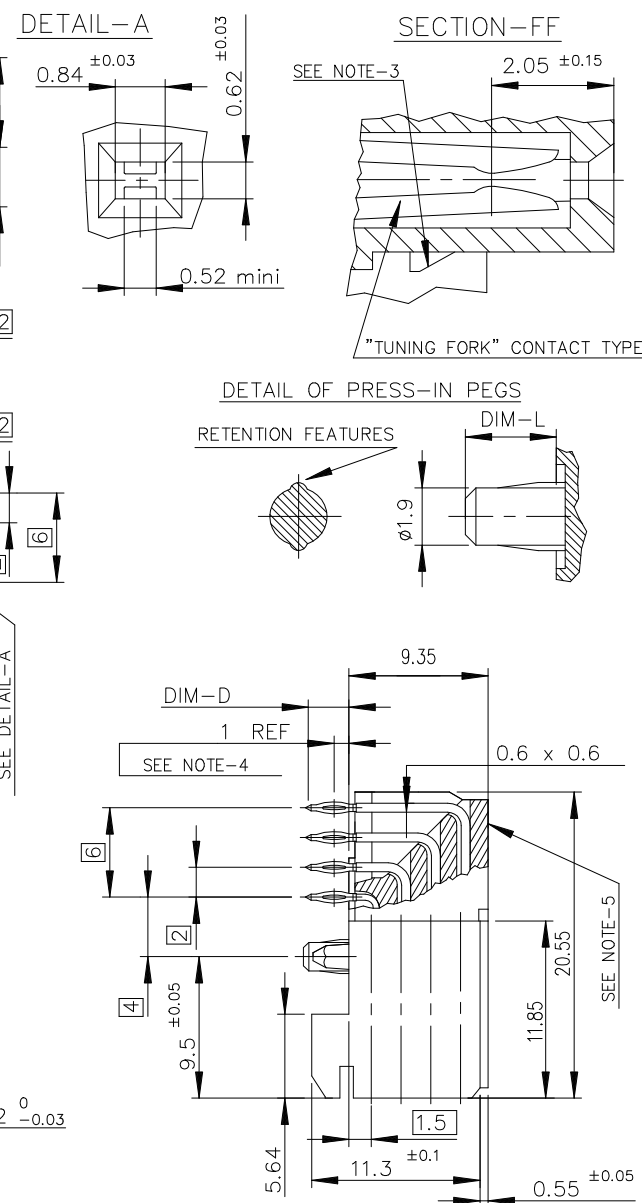


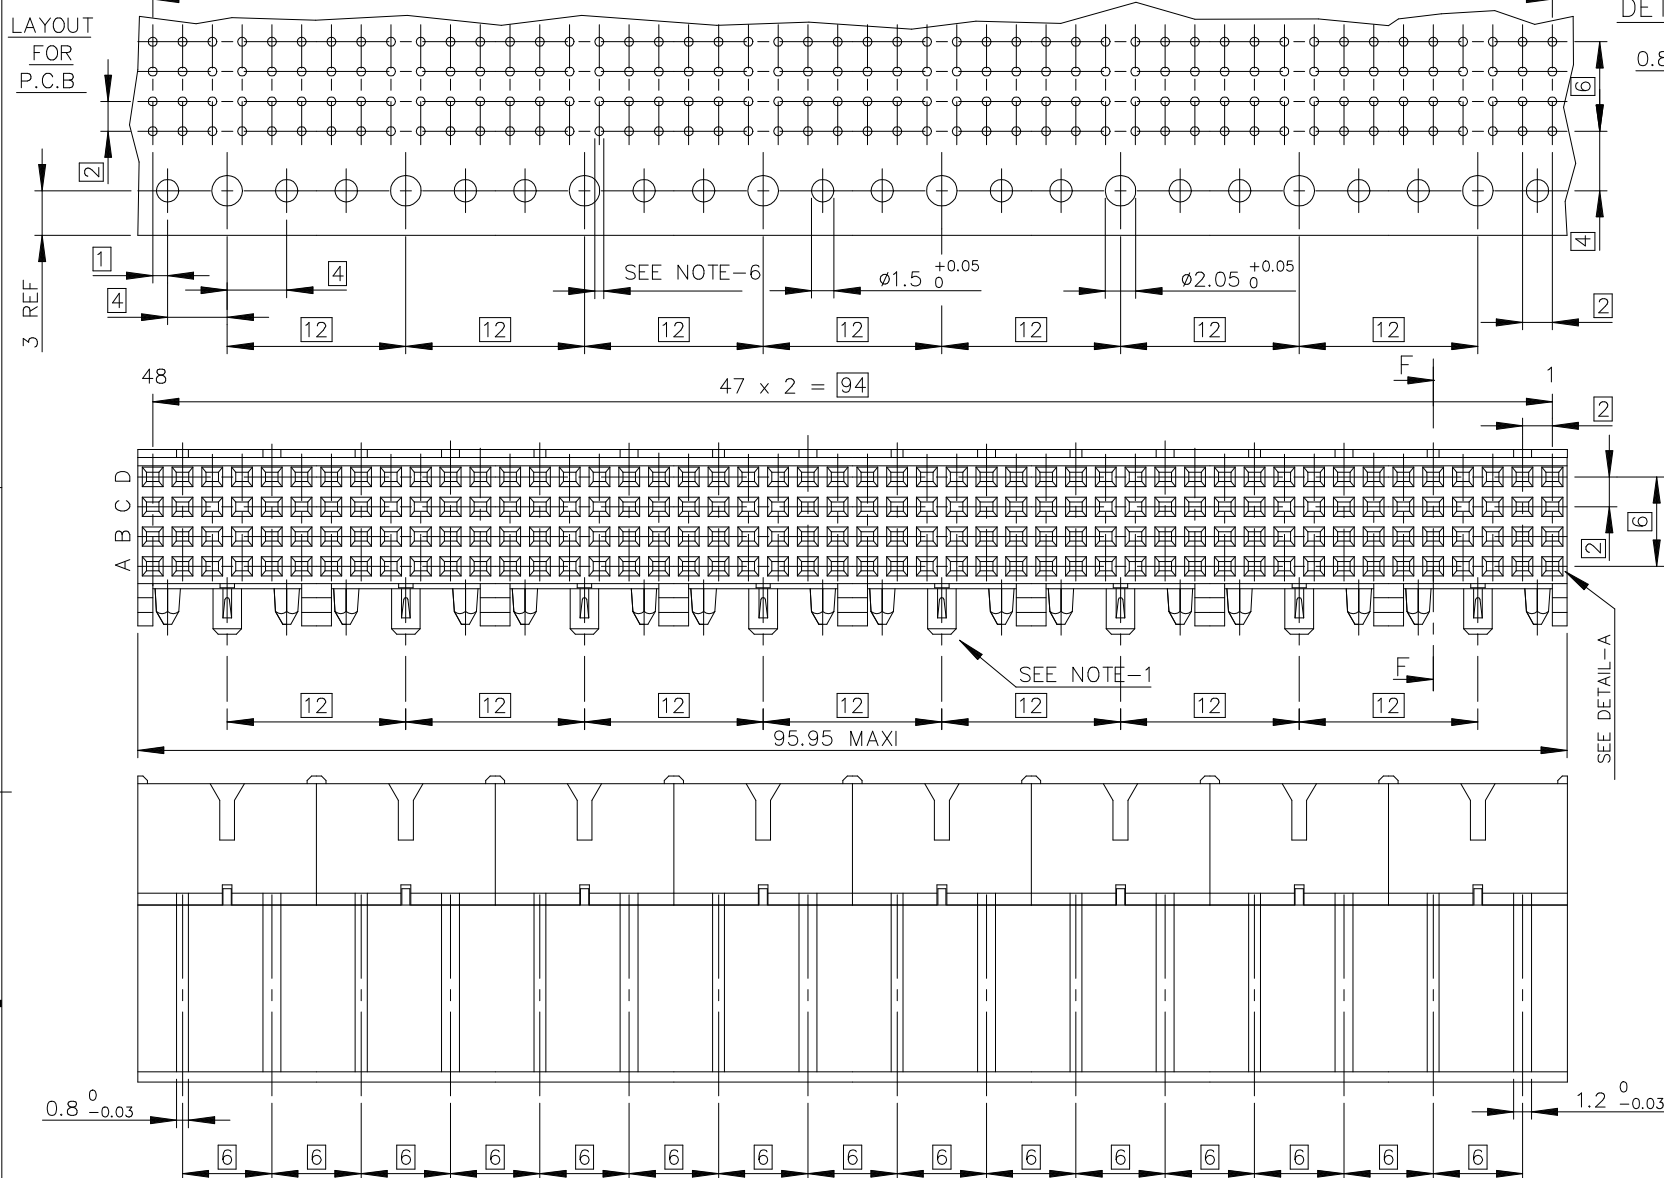

NOTE-1: PRESS-IN RETENTION PEG

NOTE-2: CONNECTORS WITH PCB-2.4mm ARE COMPATIBLE WITH WIDE AND NARROW BODIES

NOTE-3: PLUG FOR CODING KEY FIXING

NOTE-4: EYE OF THE NEEDLE PRESS-FIT CTS TYPE

NOTE-5: FLAT ROCK INSERTION TOOLING IN PCB,
SEE DRW REF:C-8626-1003

NOTE-6: METALIZED HOLE DEFINITION,SEE
GS-12-447

NOTE-7: IF SUFFIX "P" IS ADDED IN P/N,
PACKAGING IS IN TRAYS,
BUT CONNECTOR MARKING IS WITHOUT "P"
Example : HM1FxxxxxxxxHYPLF,
marking:HM1FxxxxxxxxHYLF

NOTE-8: FOR PLATING PERFORMANCE LEVEL $\triangle$
REFER DRAWING # 10159409.

NOTE-9: A $\triangle$ SYMBOL WILL BE NEXT TO ANY DIMENSION
VIEW OR NOTE WHICH HAS BEEN MODIFIED
WITH THE CURRENT DRAWING REVISION.

- 'Y' REFER PLATING PERFORMANCE LEVEL
SEE NOTE 8

PART NUMBER

Part Number: HM1F44FDP000HYLF

TERMINATION TYPE	D = 2.90 ±0.3	L = 3 ±0.05
---------------------	---------------	-------------

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE : GS-12-447

[illegible]