
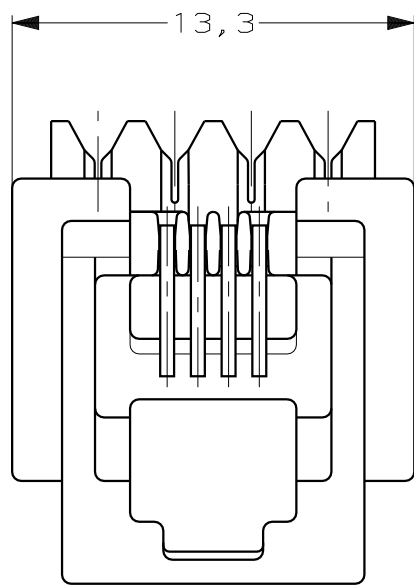
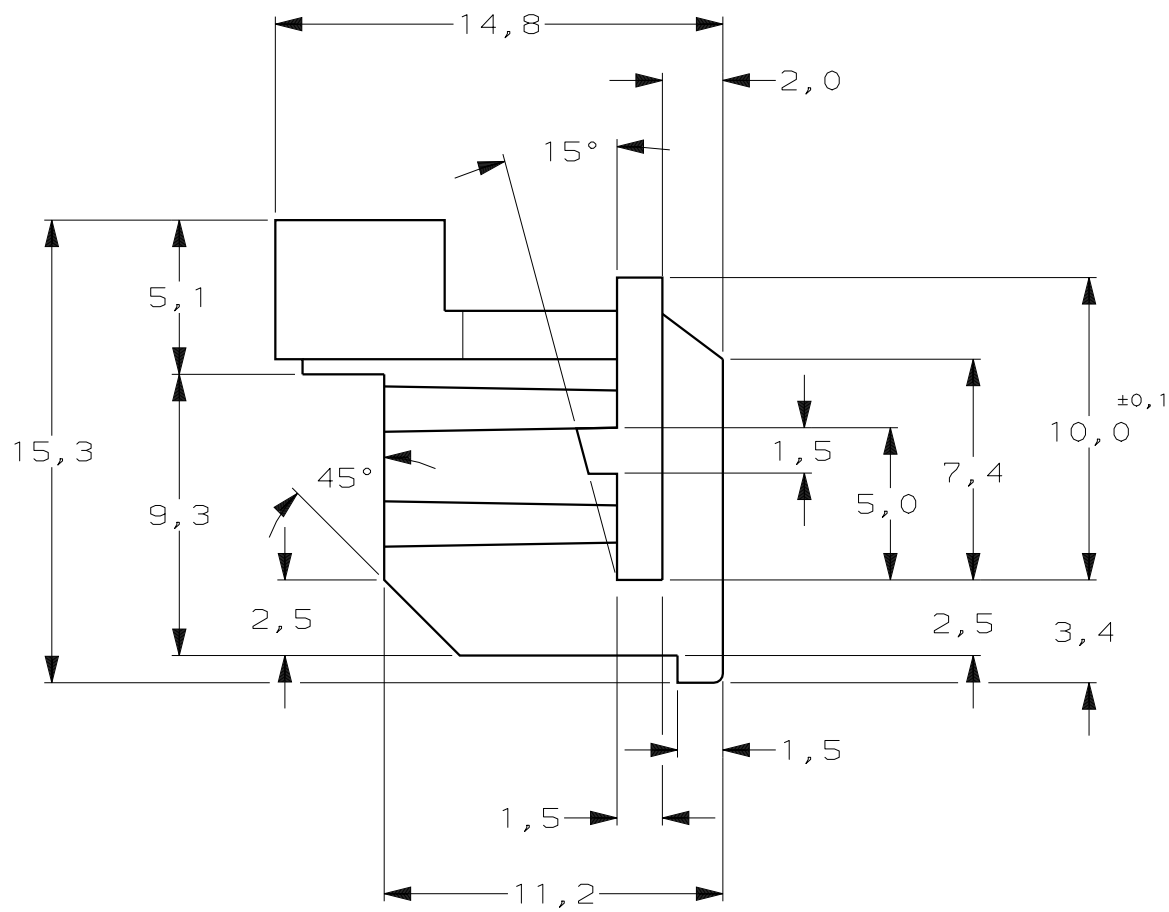
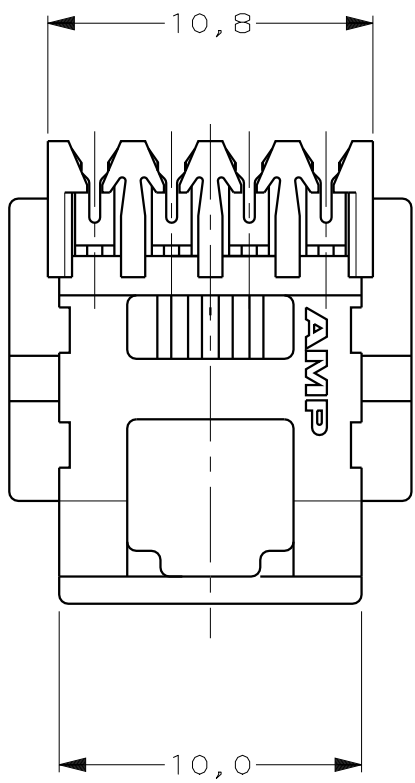
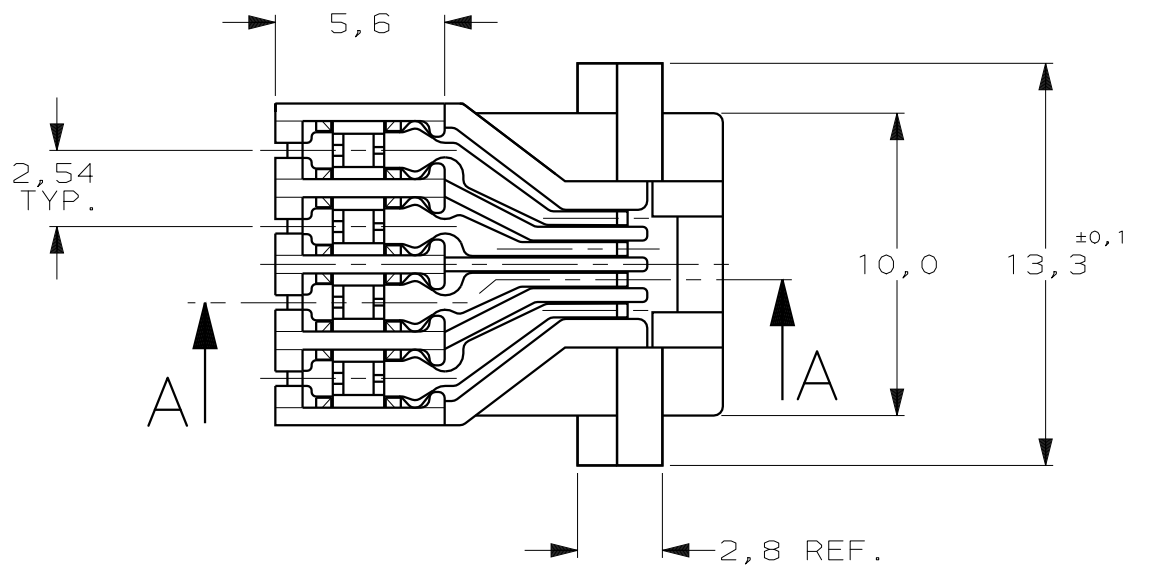


- NOTES:
- FOR APPLICATION INFORMATION SEE AMP SPECIFICATION 114-19005.
 - FOR PERFORMANCE REQUIREMENTS SEE AMP SPECIFICATION 108-19039.
 - GENERAL TOLERANCE $\pm 0,15\text{mm}$ UNLESS OTHERWISE SPECIFIED.

DO NOT SCALE
DIMENSIONS IN mm

METRIC


THIRD ANGLE
PROJECTION



CONTACT PLATING IN THIS AREA :
1,25 μm MIN. TIN

CONTACT AREA GOLD PLATING THICKNESS :
SEE TABLE.

UNDERPLATING ON ENTIRE CONTACT :
1,25 μm NICKEL.

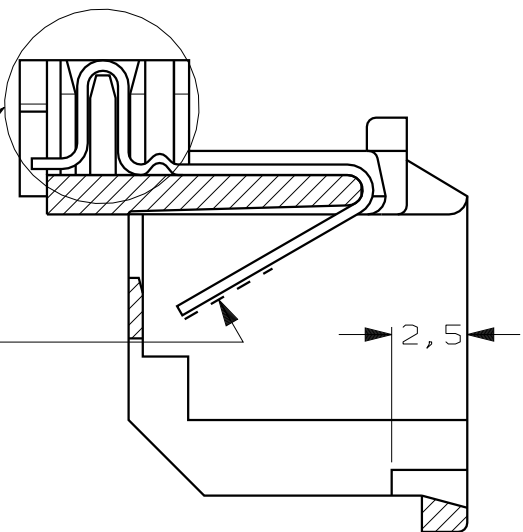

SEC. A-A

OBSOLETE

800 pcs. ON 60 cm. DIA REEL		0,8 μm			HOUSING : ABS COLOR : CLEAR		2-216780-2		
		1,25 μm					2-216780-1		
3000 pcs. IN A BOX		0,8 μm			CONTACTS : PHOS.PH. BRONZE		216780-2		
		1,25 μm					216780-1		
PACKAGING		GOLD PLATING IN CONTACT AREA			MATERIAL		ORDERNUMBER		
-	-	-	-	-	CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED © COPYRIGHT 19- BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED.AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION ,19  AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.				
-	-	-	-	-					
-	-	-	-	-					
-	-	-	-	-					
-	-	-	-	-					
F	ECR-05-013405	PW	JB	18 OCT 05	NAME		MODULAR JACK, 4 POS./4 CONT. WITH INSULATION DISPLACEMENT CONTACTS		
E	EH-0176-98	EvE	WB	10 FEB 98					
LTR.	REVISION RECORD	DR.	CHK.	DATE					
DR. : L.V.D.HEIJDEN		CHK. : M. DE WINTER		APP. : L. VAN SOEST		DWG.No.			
DATE: 20 OKT 89		DATE: 26-10-89		DATE: -		C-216780			
						REV.LTR.		SHEET	
						F		1 OF 1	
								A2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-216780-2](#)