
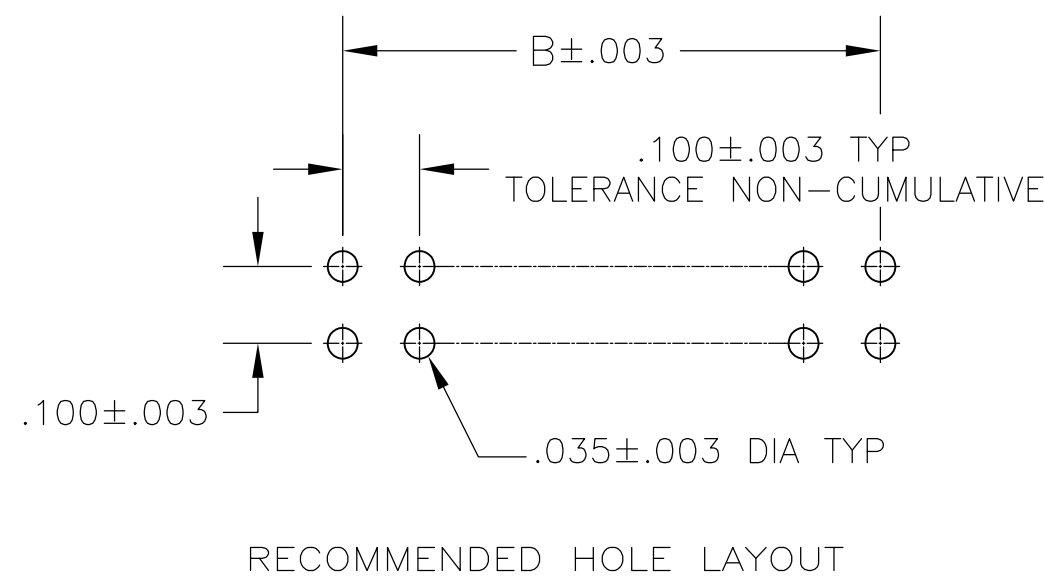
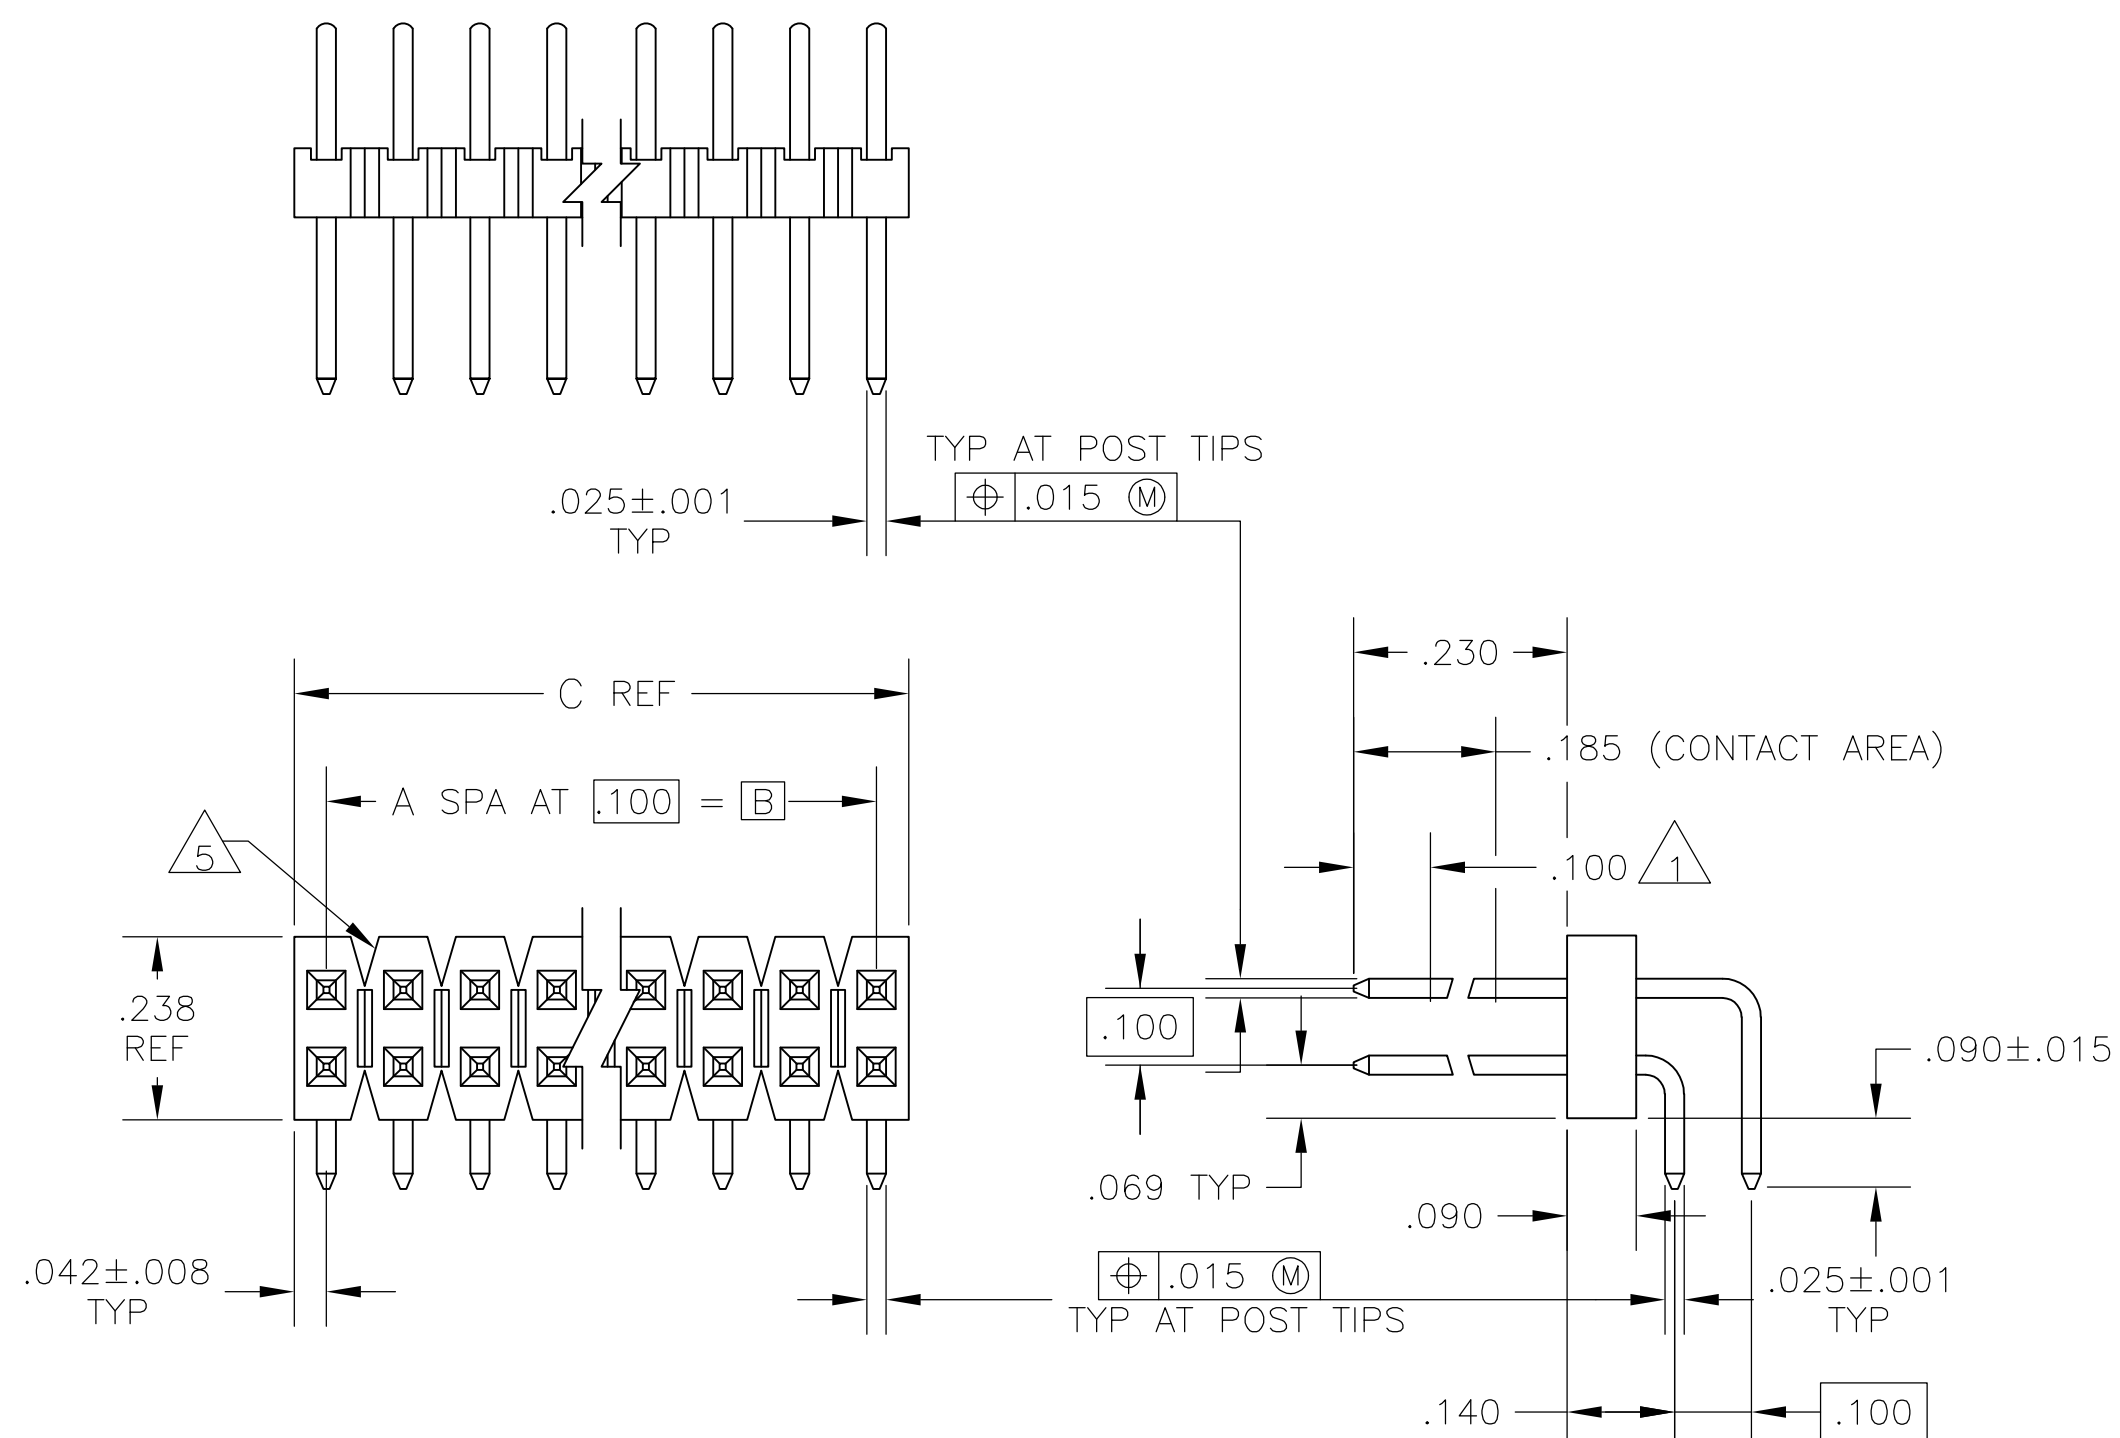




- | | |
|---|---|
| 1 | POINT OF MEASUREMENT FOR PLATING THICKNESS |
| 2 | ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS |
| 3 | TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD |
| 4 | .000030 GOLD ON THE CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL |
| 5 | BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT |
| 6 | .000030 GOLD ON THE CONTACT AREA, .000100-.000200 MATTE TIN ON THE SOLDER TAIL, ALL OVER .000050 NICKEL |
| 7 | HIGH TEMPERATURE CONFIGURATION |
| 8 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

8 7	6 7	3.984	3.900	39	80	9-103801-0	8 7	6 7	3.984	3.900	39	80	4-103801-0
8 7	6 6	3.884	3.800	38	78	8-103801-0	8 7	6 6	3.884	3.800	38	78	3-103801-0
8 7	6 5	3.784	3.700	37	76	8-103801-8	8 7	6 5	3.784	3.700	37	76	3-103801-8
8 7	6 4	3.684	3.600	36	74	8-103801-7	8 7	6 4	3.684	3.600	36	74	3-103801-7
8 7	6 3	3.584	3.500	35	72	8-103801-6	8 7	6 3	3.584	3.500	35	72	3-103801-6
8 7	6 2	3.484	3.400	34	70	8-103801-5	8 7	6 2	3.484	3.400	34	70	3-103801-5
8 7	6 1	3.284	3.300	33	68	8-103801-4	8 7	6 1	3.284	3.300	33	68	3-103801-4
8 7	6 0	3.284	3.200	32	66	8-103801-3	8 7	6 0	3.284	3.200	32	66	3-103801-3
8 7	6 0	3.184	3.100	31	64	8-103801-2	8 7	6 0	3.184	3.100	31	64	3-103801-2
8 7	6 0	3.084	3.000	30	62	8-103801-1	8 7	6 0	3.084	3.000	30	62	3-103801-1
8 7	6 0	2.984	2.900	29	60	3-103801-0	8 7	6 0	2.984	2.900	29	60	3-103801-0
8 7	6 0	2.884	2.800	28	58	7-103801-9	8 7	6 0	2.884	2.800	28	58	2-103801-9
8 7	6 0	2.784	2.700	27	56	7-103801-8	8 7	6 0	2.784	2.700	27	56	2-103801-8
8 7	6 0	2.684	2.600	26	54	7-103801-7	8 7	6 0	2.684	2.600	26	54	2-103801-7
8 7	6 0	2.584	2.500	25	52	7-103801-6	8 7	6 0	2.584	2.500	25	52	2-103801-6
8 7	6 0	2.484	2.400	24	50	7-103801-5	8 7	6 0	2.484	2.400	24	50	2-103801-5
8 7	6 0	2.384	2.300	23	48	7-103801-4	8 7	6 0	2.384	2.300	23	48	2-103801-4
8 7	6 0	2.284	2.200	22	46	7-103801-3	8 7	6 0	2.284	2.200	22	46	2-103801-3
8 7	6 0	2.184	2.100	21	44	7-103801-2	8 7	6 0	2.184	2.100	21	44	2-103801-2
8 7	6 0	2.084	2.000	20	42	7-103801-1	8 7	6 0	2.084	2.000	20	42	2-103801-1
8 7	6 0	1.984	1.900	19	40	7-103801-0	8 7	6 0	1.984	1.900	19	40	2-103801-0
8 7	6 0	1.884	1.800	18	38	6-103801-9	8 7	6 0	1.884	1.800	18	38	1-103801-9
8 7	6 0	1.784	1.700	17	36	6-103801-8	8 7	6 0	1.784	1.700	17	36	1-103801-8
8 7	6 0	1.684	1.600	16	34	6-103801-7	8 7	6 0	1.684	1.600	16	34	1-103801-7
8 7	6 0	1.584	1.500	15	32	6-103801-6	8 7	6 0	1.584	1.500	15	32	1-103801-6
8 7	6 0	1.484	1.400	14	30	6-103801-5	8 7	6 0	1.484	1.400	14	30	1

REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER	REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.							DWN L. D. RINGLEY		 TE Connectivity				
							OK'D R. FLICKER						
DIMENSIONS: INCHES 							TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLG ± — 1 PLG ± — 2 PLG ± — 3 PLG ± .005 4 PLG ± — ANGLES ± —		NAME R. FLICKER				
							PRODUCT SPEC —		ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, RIGHT ANGLE, .100X.100 C/L, WITH .025 SQUARE POSTS				
MATERIAL: HOUSING : FLAME RETARDANT THERMOPLASTIC COLOR : BLACK POSTS : COPPER ALLOY							APPLICATION SPEC —		SIZE A1				
							FINISH SEE TABLE		CAGE CODE 00779				
CUSTOMER DRAWING							WEIGHT —		DRAWING NO C=103801				
							SCALE 4:1		SHEET 1 OF 1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103801-0](#)