


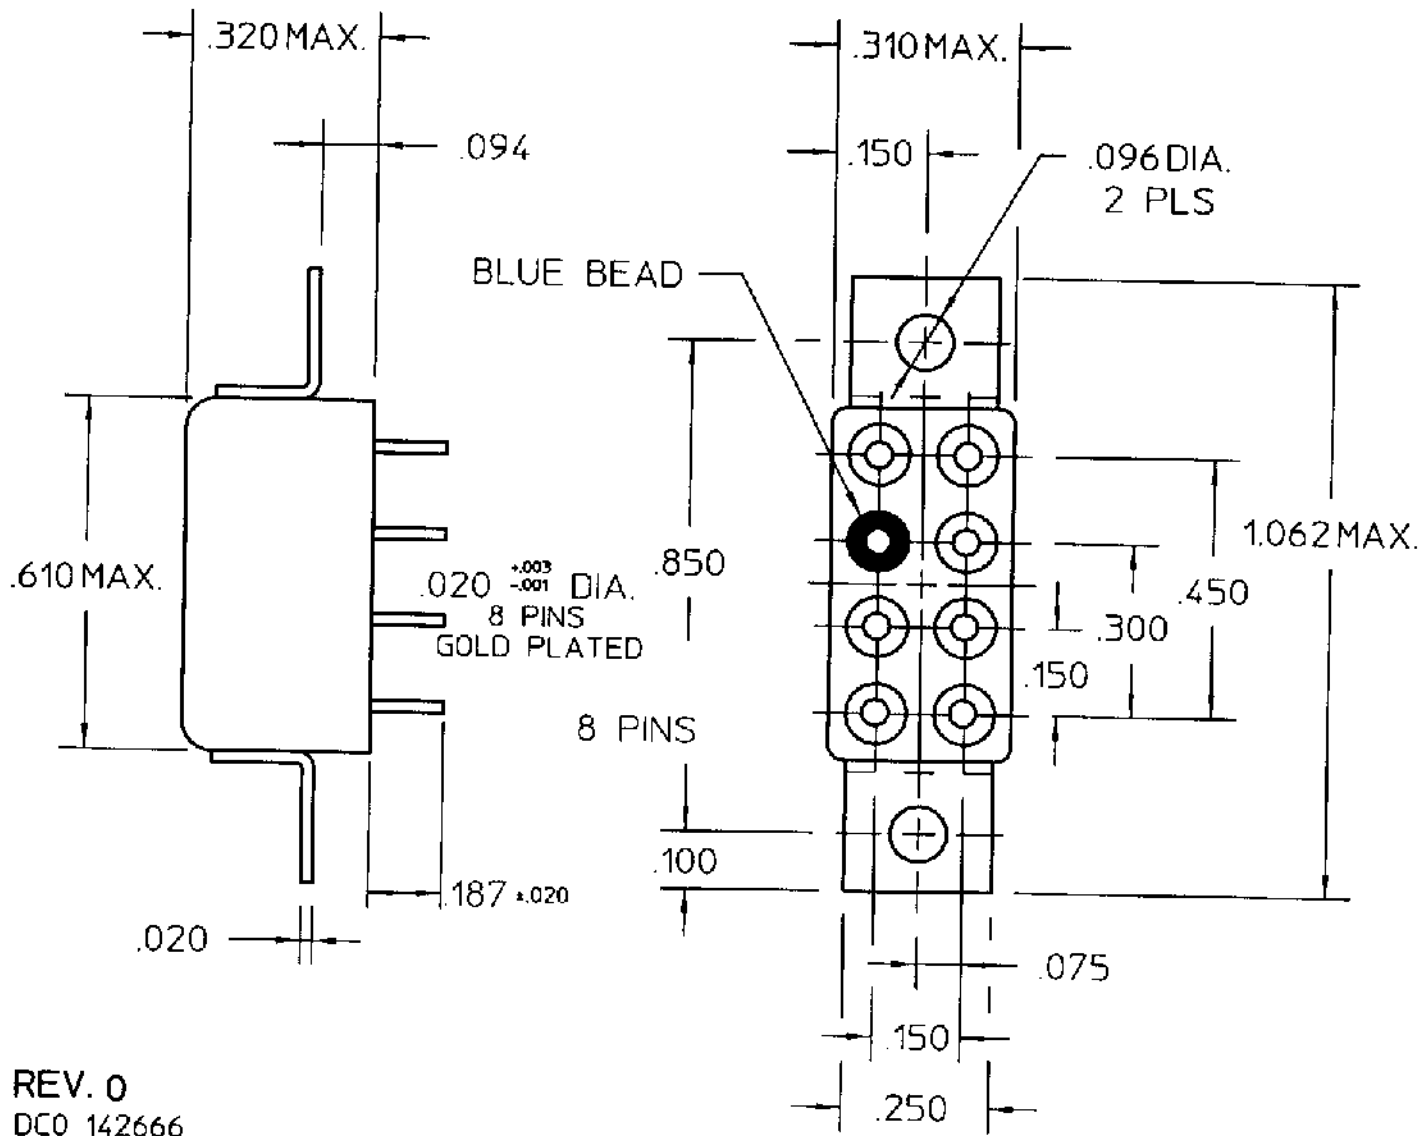

TOL $\pm .010$ UNLESS OTHERWISE SPECIFIED


COIL: @ 25°C
 RESISTANCE 1350 OHMS $\pm 10\%$
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 8.1 VDC MAX. 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
 CONTACT BOUNCE 2.0 MS MAX.

CUSTOMER DATA SHEET

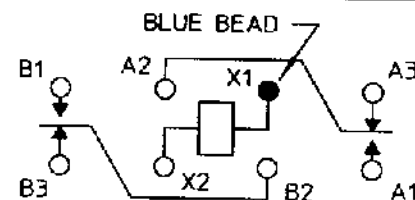

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 50,000 OPERATIONS

DR. PBB 1/26/01 CK.TLQ 1-26-01

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/13-123L REV.

'3SBC' RELAY

3SBC2146A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBC2146A2](#)