


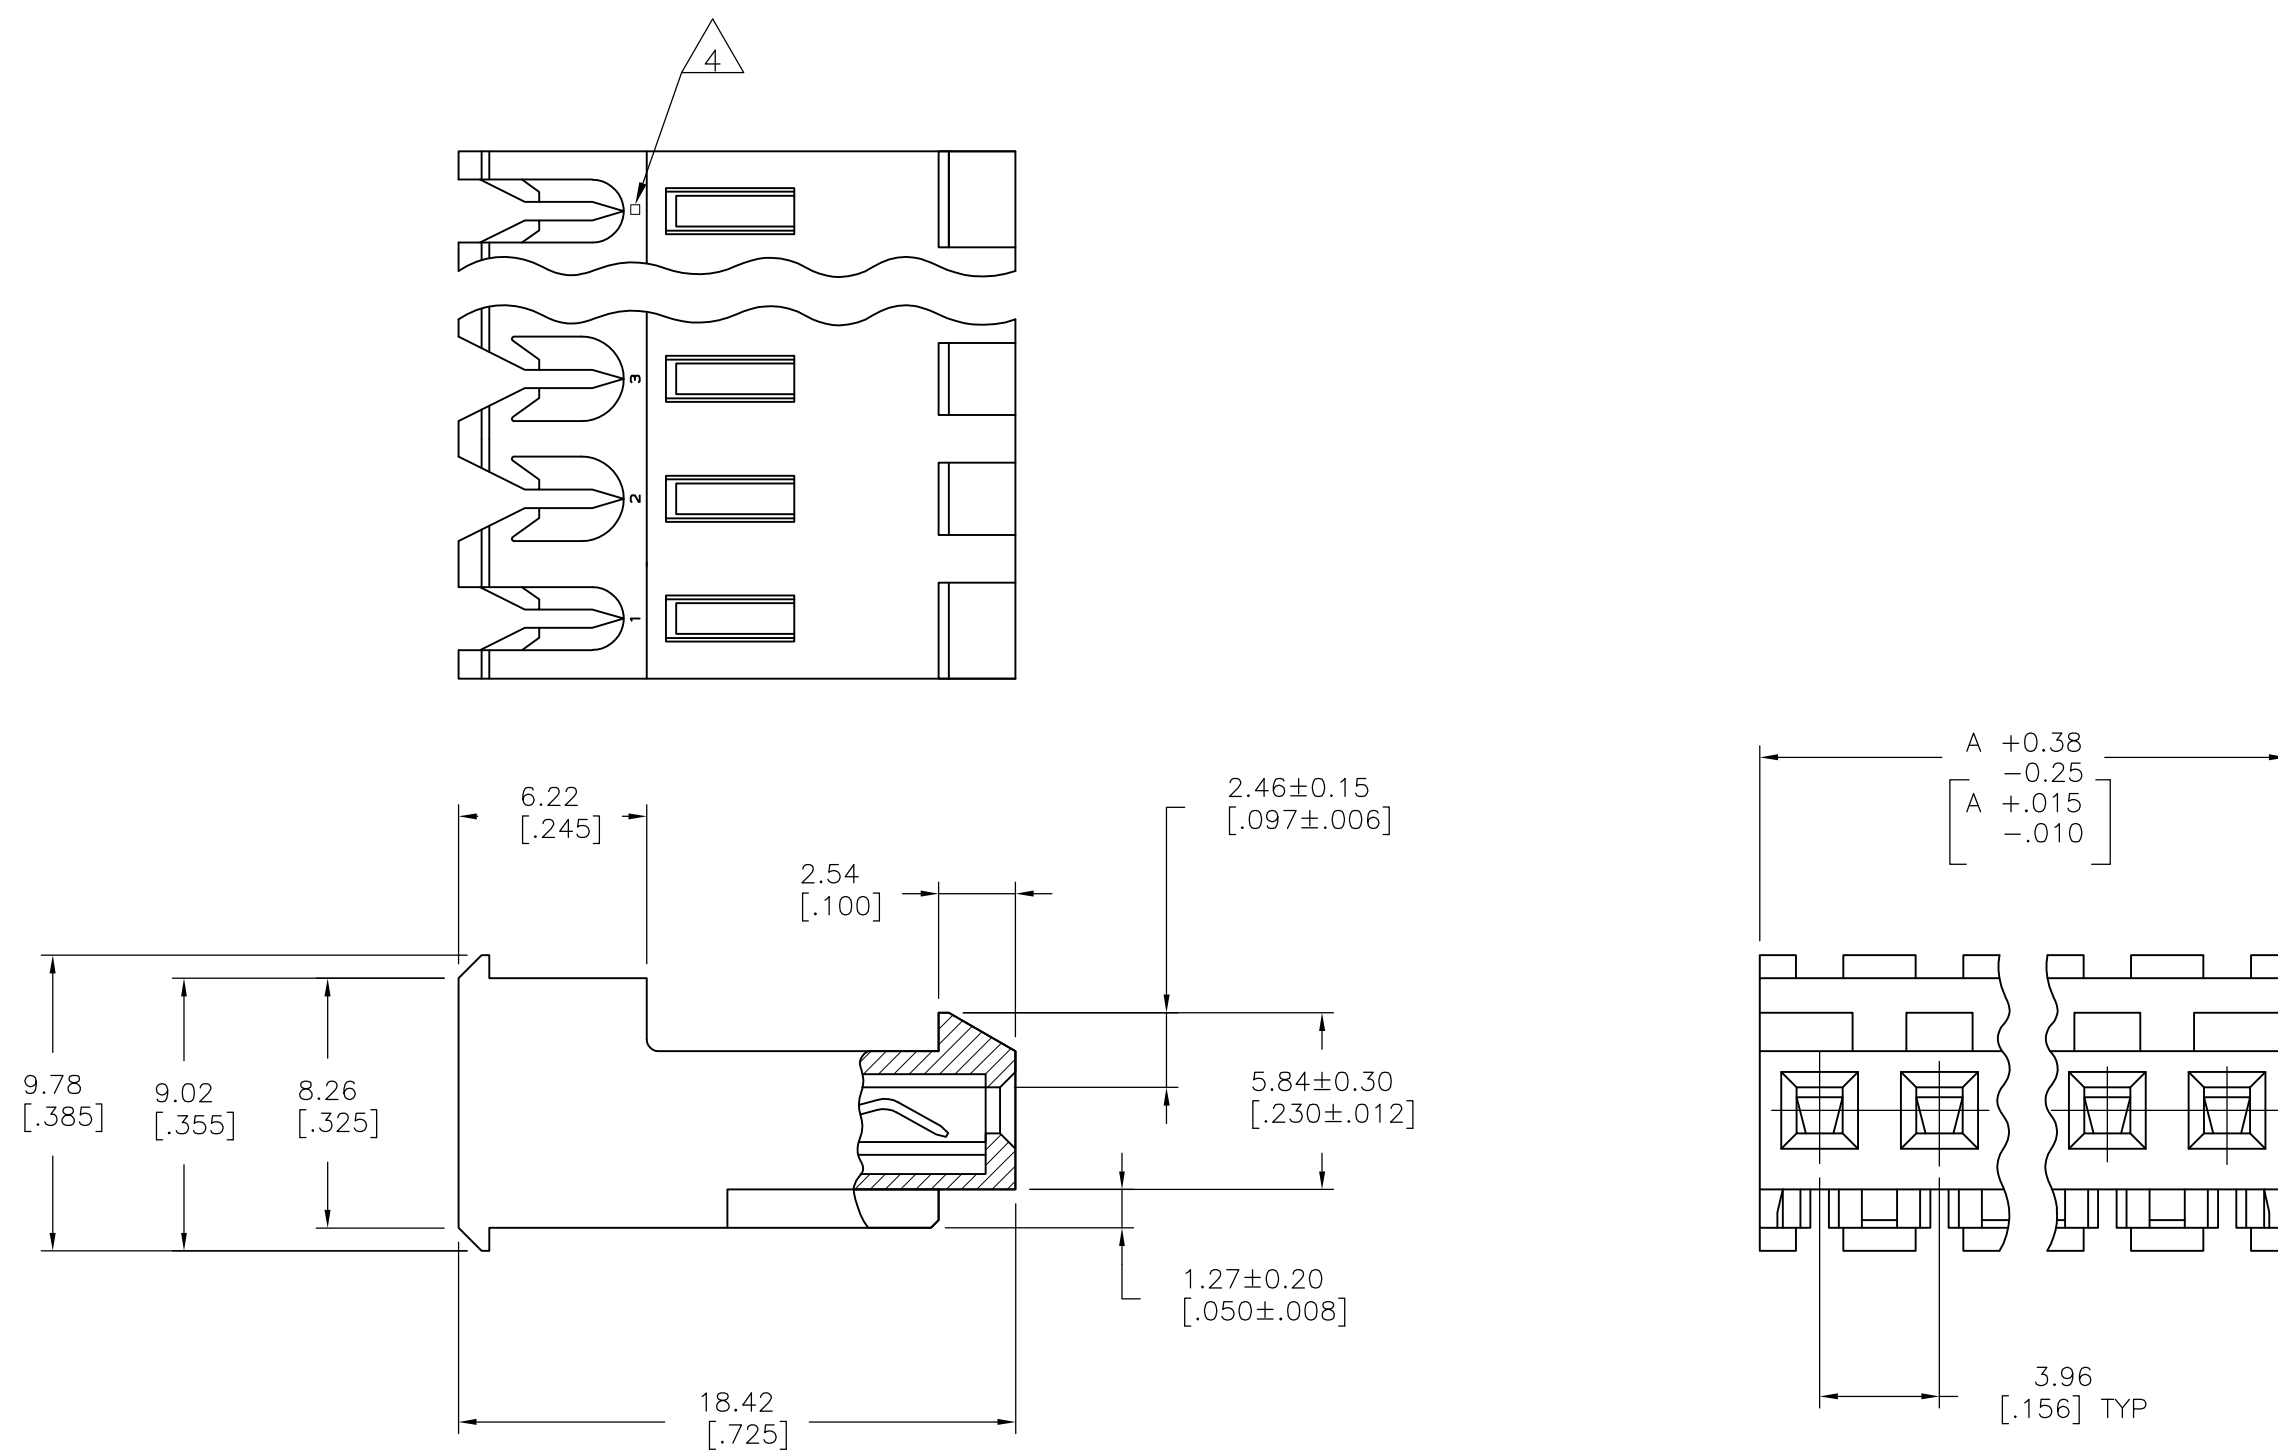

95.10	[3.744]	24	5-640595-4
91.14	[3.588]	23	5-640595-3
87.17	[3.432]	22	5-640595-2
83.21	[3.276]	21	5-640595-1
79.25	[3.120]	20	5-640595-0
75.29	[2.964]	19	4-640595-9
71.32	[2.808]	18	4-640595-8
67.36	[2.652]	17	4-640595-7
63.40	[2.496]	16	4-640595-6
59.44	[2.340]	15	4-640595-5
55.47	[2.184]	14	4-640595-4
51.51	[2.028]	13	4-640595-3
47.55	[1.872]	12	4-640595-2
43.59	[1.716]	11	4-640595-1
39.62	[1.560]	10	4-640595-0
35.66	[1.404]	9	3-640595-9
31.70	[1.248]	8	3-640595-8
27.74	[1.092]	7	3-640595-7
23.77	[.936]	6	3-640595-6
19.81	[.780]	5	3-640595-5
15.85	[.624]	4	3-640595-4
11.89	[.468]	3	3-640595-3
7.92	[.312]	2	3-640595-2

1 MATERIAL: CONNECTOR – NYLON UL94V-2 (BLUE).
CONTACTS – 0.30[.012] THICK COPPER ALLOY
(BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK
FOR CONTACTS 640595-2 THRU 2-640595-4]
(MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN
THICKNESS OVER NICKEL UNDERPLATE FOR
3-640595-2 THRU 5-640595-4).

2 CONTACTS ACCEPT 26 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.

3 CONTACTS MUST ACCEPT 1.14 ± 0.03 [.045 $\pm$.001] SQUARE POST AND REMAIN LOCKED IN POSITION.

4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.

5 DIMENSIONS IN BRACKETS ARE IN INCHES.

6 HOUSING FEATURES ARE: FEED-THRU WITH LOCKING RAMP.

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

7	SUPERSEDED BY 5-640595-4	95.10 [3.744]	24	2-640595-4
7	SUPERSEDED BY 5-640595-3	91.14 [3.588]	23	2-640592-3
7	SUPERSEDED BY 5-640595-2	87.17 [3.432]	22	2-640592-2
7	SUPERSEDED BY 5-640595-1	83.21 [3.276]	21	2-640592-1
7	SUPERSEDED BY 5-640595-0	79.25 [3.120]	20	2-640592-0
7	SUPERSEDED BY 4-640595-9	75.29 [2.964]	19	1-640592-9
7	SUPERSEDED BY 4-640595-8	71.32 [2.808]	18	1-640595-8
7	SUPERSEDED BY 4-640595-7	67.36 [2.652]	17	1-640595-7
7	SUPERSEDED BY 4-640595-6	63.40 [2.496]	16	1-640595-6
7	SUPERSEDED BY 4-640595-5	59.44 [2.340]	15	1-640595-5
7	SUPERSEDED BY 4-640595-4	55.47 [2.184]	14	1-640595-4
7	SUPERSEDED BY 4-640595-3	51.51 [2.028]	13	1-640595-3
7	SUPERSEDED BY 4-640595-2	47.55 [1.872]	12	1-640595-2
7	SUPERSEDED BY 4-640595-1	43.59 [1.716]	11	1-640595-1
7	SUPERSEDED BY 4-640595-0	39.62 [1.560]	10	1-640595-0
7	SUPERSEDED BY 3-640595-9	35.66 [1.404]	9	640595-9
7	SUPERSEDED BY 3-640595-8	31.70 [1.248]	8	640595-8
7	SUPERSEDED BY 3-640595-7	27.74 [1.092]	7	640595-7
7	SUPERSEDED BY 3-640595-6	23.77 [.936]	6	640595-6
7	SUPERSEDED BY 3-640595-5	19.81 [.780]	5	640595-5
7	SUPERSEDED BY 3-640595-4	15.85 [.624]	4	640595-4
7	SUPERSEDED BY 3-640595-3	11.89 [.468]	3	640595-3
	OBSOLETE	7.92 [.312]	2	-640595-2-

	DIM A	NO OF CIRCUITS	PART NO
--	-------	-------------------	---------

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN B. LEWIS 12FEB91		 TE Connectivity								
			CHK R. SWING 12FEB91										
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. CLARK 19FEB91		NAME							
		0 PLC ± -		PRODUCT SPEC		MTA-156 CONNECTOR ASSEMBLY, 26 AWG, STANDARD							
		1 PLC ± -		108-1051									
		2 PLC ± -		APPLICATION SPEC									
3 PLC ± 0.13 [.005]		4 PLC ± -		114-1020		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
MATERIAL		FINISH		WEIGHT		A2		00779		C-640595		—	
				CUSTOMER DRAWING				SCALE 4:1		SHEET 1 of 1		REV R2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-640595-4](#)