



Sep.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

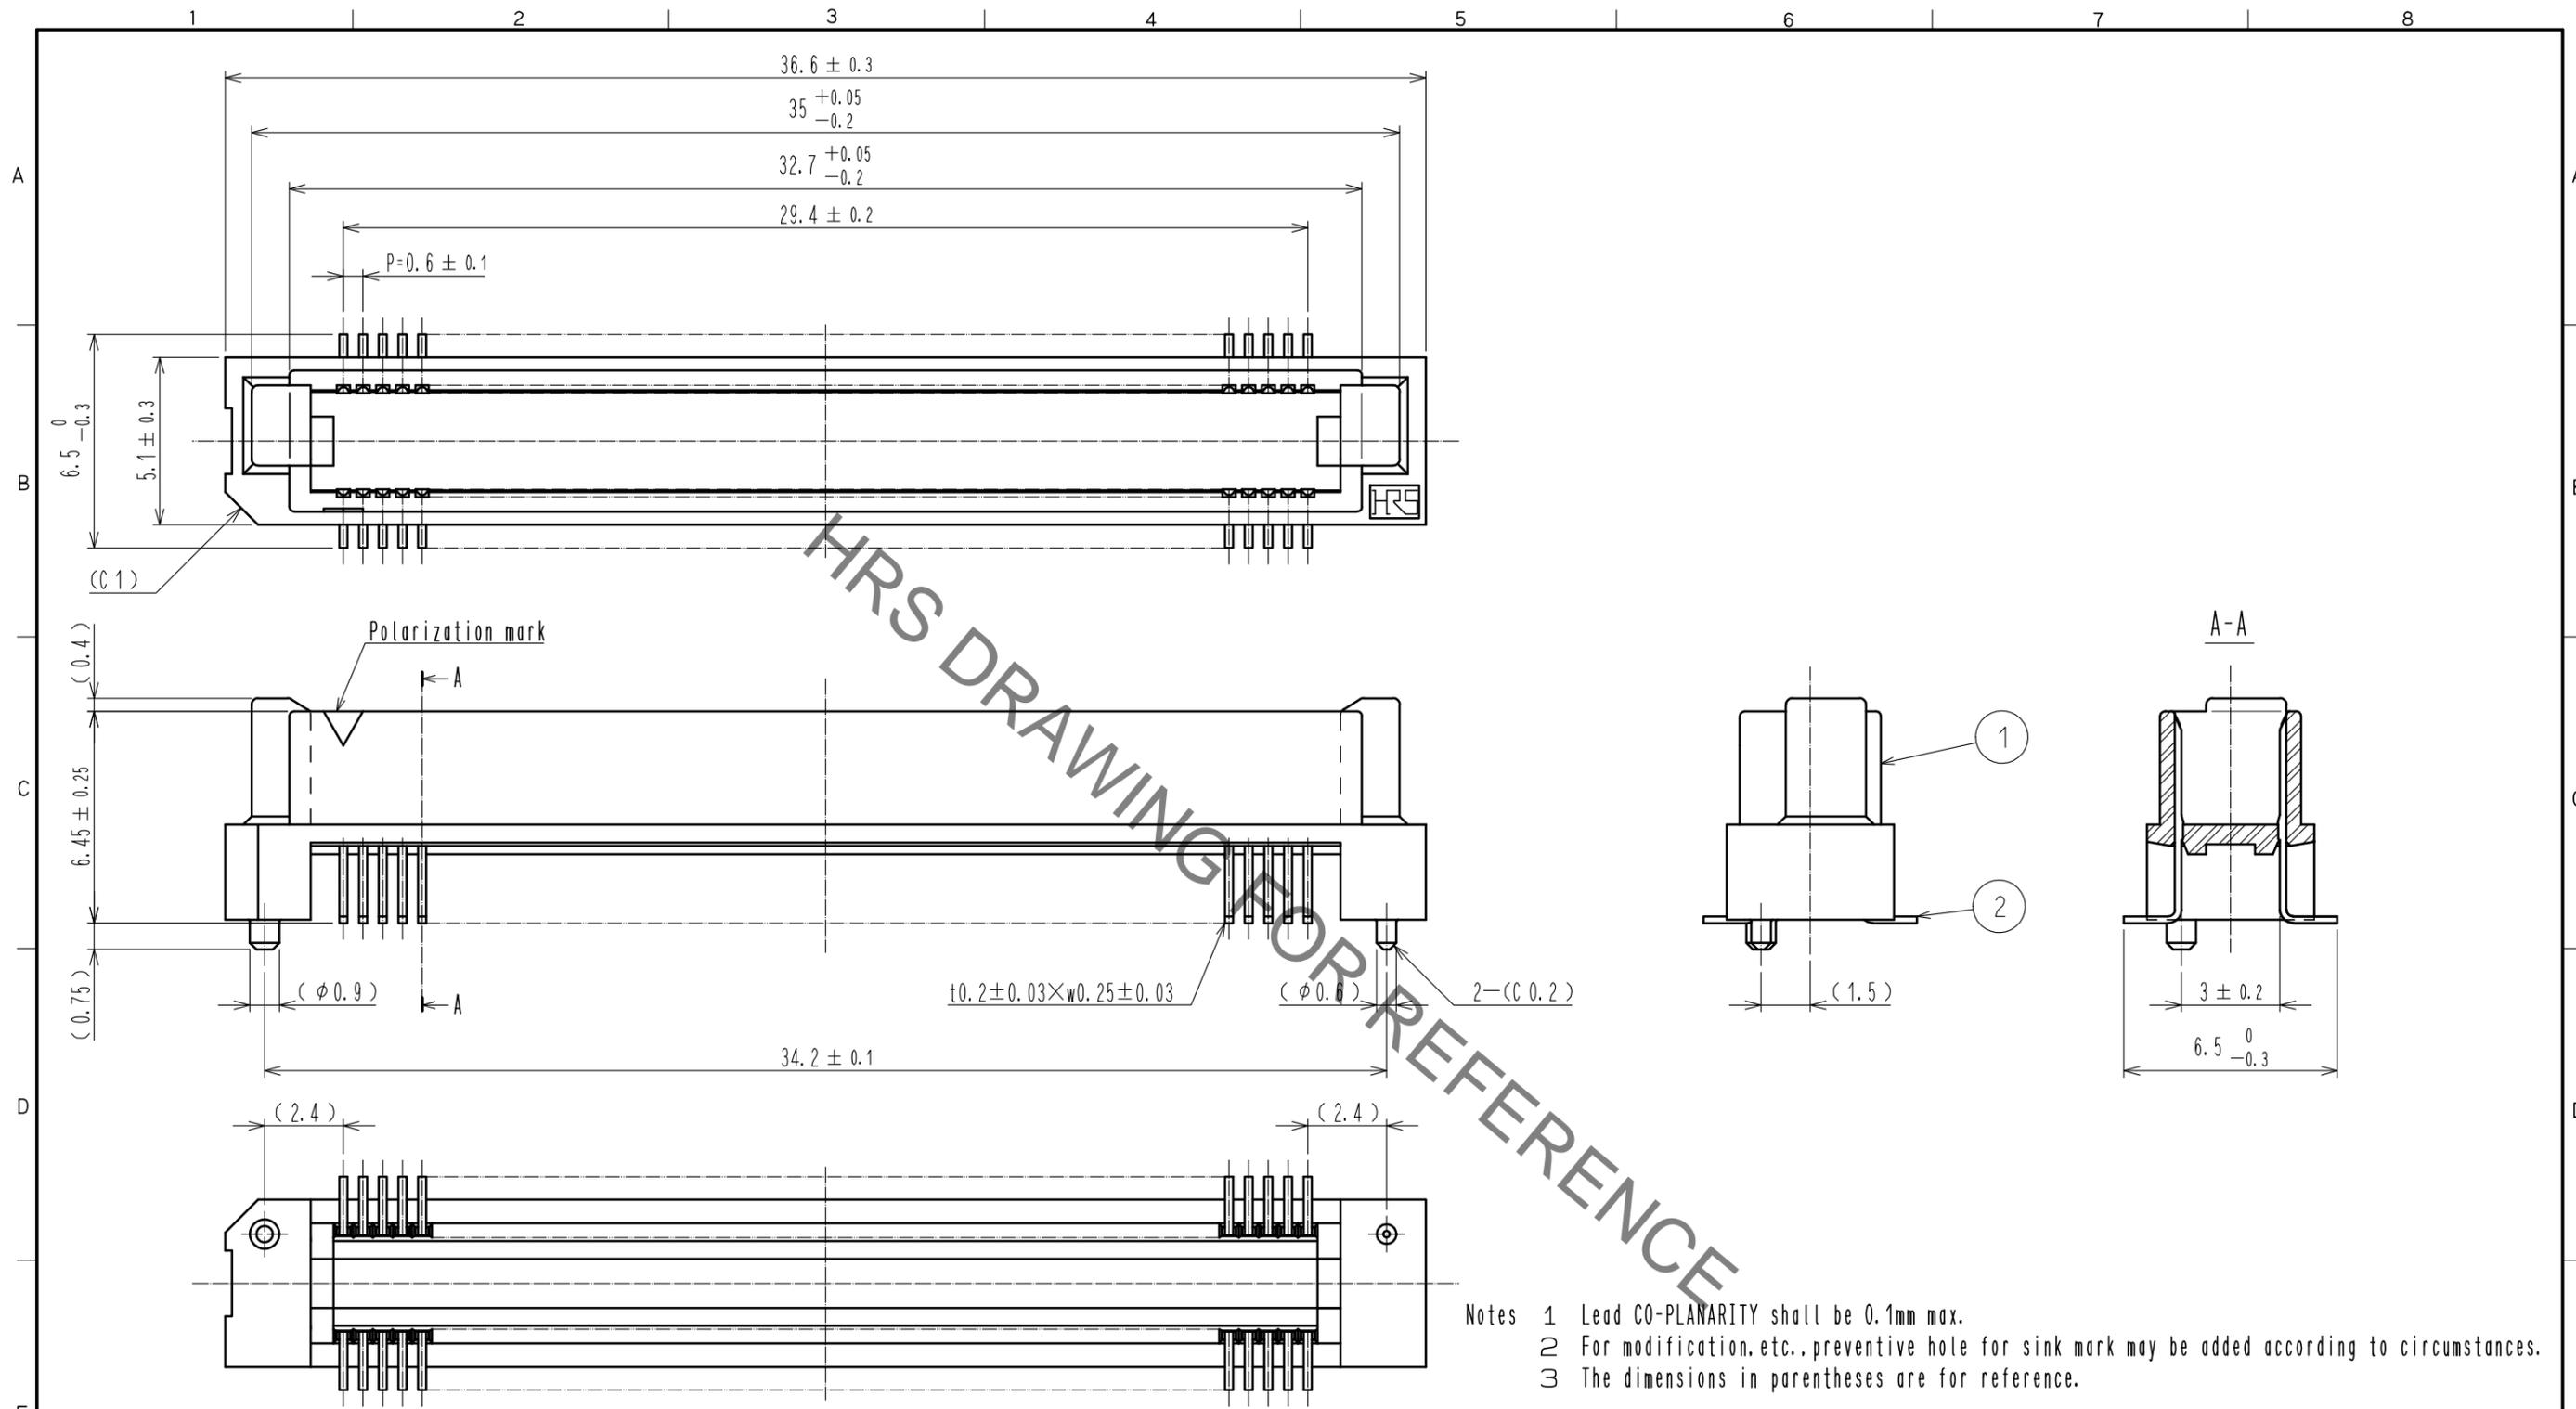

Recommended land pattern dimension of PCB (mounting side) (2:1)

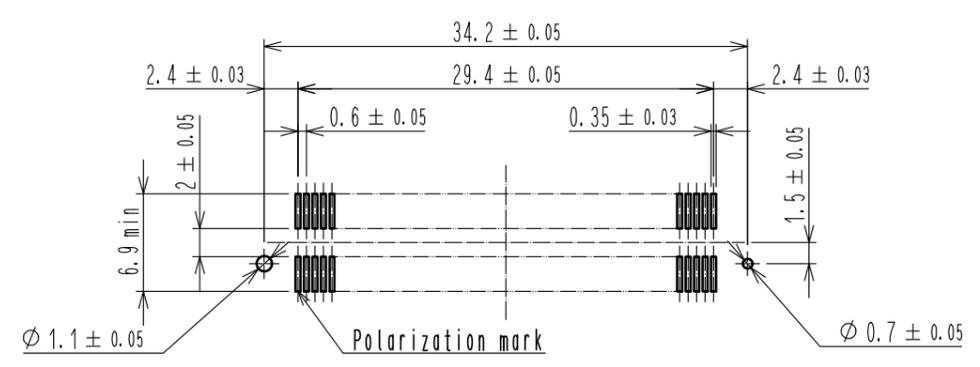

1	PPS	Light brown (UL94V-0)	2	PHOSPHOR BRONZE	Contact area : Gold 0.1μm min. Lead area : Tin-plating 1μm min. Under plating : Nickel 1μm min.
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00006415	DESIGNED KS. NAKAJIMA
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	20051117	DRAWING NO. EDC-150843-71-25	CHECKED HT. YAMAGUCHI
		CHECKED : HS. OZAWA	20051117	PART NO. FX8C-100P-SV2(71)	DATE 20200803
		DESIGNED : KY. NAKAMURA	20051117	CODE NO. CL578-0545-4-71	
		DRAWN : KY. NAKAMURA	20051117		



Sep.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

【 Precaution 】

When a board with multiple connectors mounted is mated, the connector may be damaged or deformed.
Please divide one side of the board so only one connector is mated per board.

OK

NG

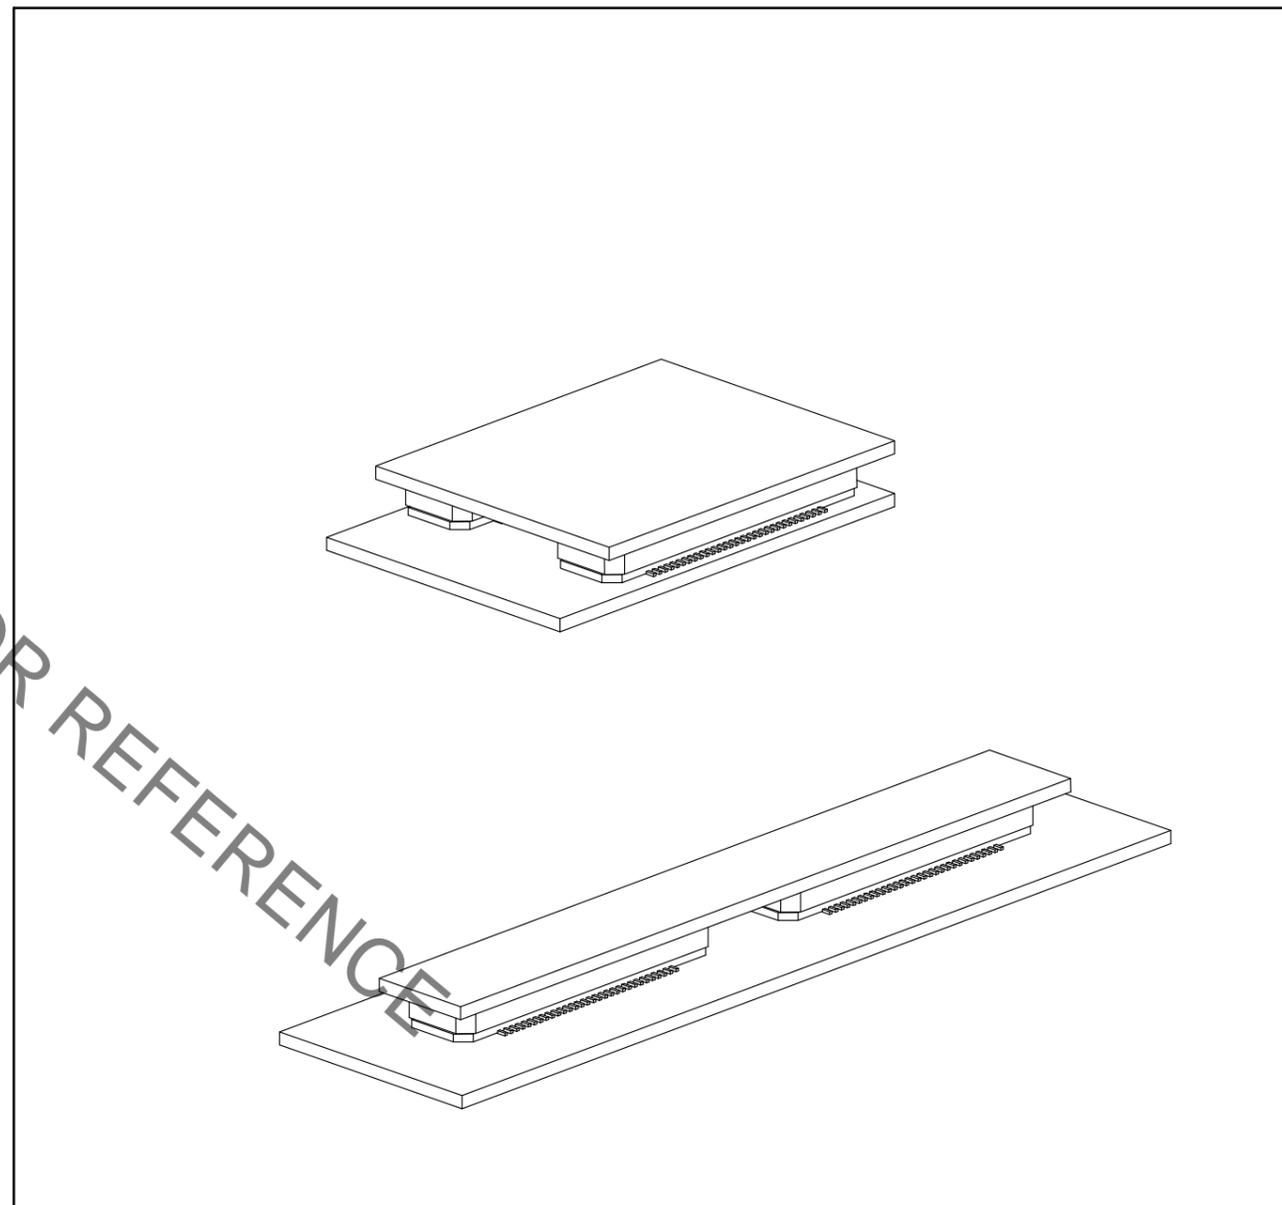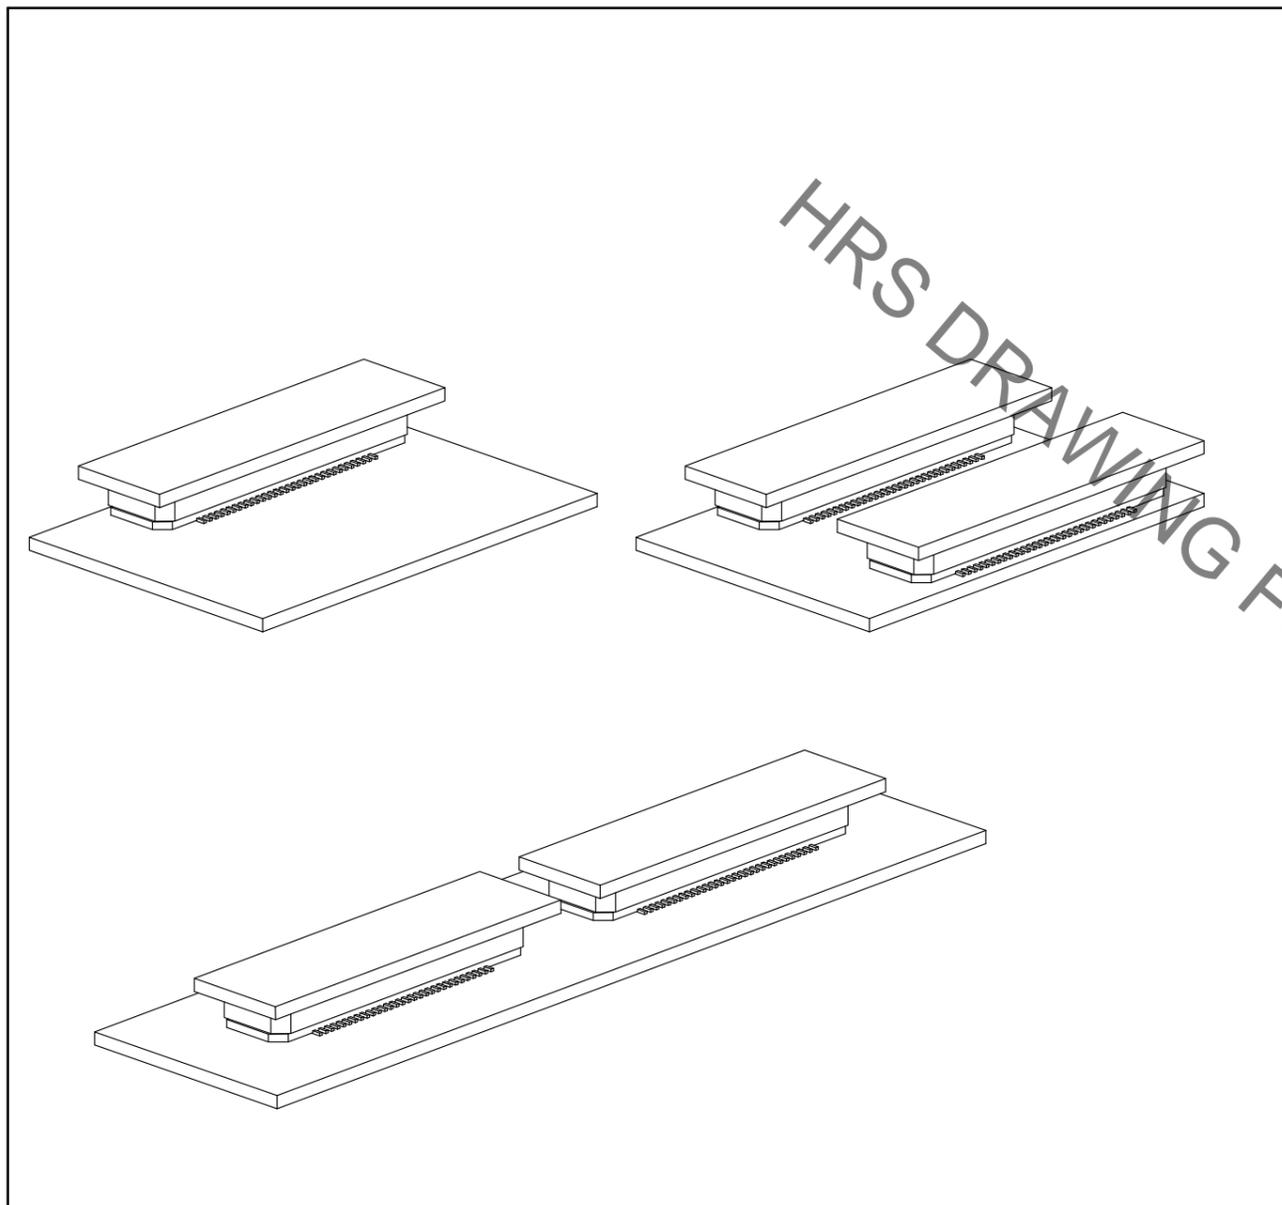

HRS DRAWING FOR REFERENCE

HRS	DRAWING NO.	EDC-150843-71-25
	PART NO.	FX8C-100P-SV2(71)
	CODE NO.	CL578-0545-4-71
		2/2