

## NLP250 Medical Series

Single Output

### Data Sheet


**Total Power:** 250 W  
**Input Voltage:** 85 - 264 Vac  
**# of Outputs:** Single

### SPECIAL FEATURES

- Medical safeties
- Active PFC and EN61000-3-2 compliant
- 250 W on main channel with forced air
- Low profile fits 1U applications
- U-Channel for maximum thermal performance
- Optional cover (CJ suffix)
- 5 V standby output
- 12 V fan output
- Integrated control and monitoring features
- Overcurrent, overvoltage and overtemperature protection
- Compliance to EN55022-B conducted noise standard
- Dual AC fuses
- RoHS compliant
- Two year warranty

### SAFETY

- VDE0750/EN60950  
IEC950/IEC60601-1  
File No. 1177400-3336-0759
- UL60601-1  
File No. E186249
- Certificate No. 40014041
- CB Ref DE1-36628

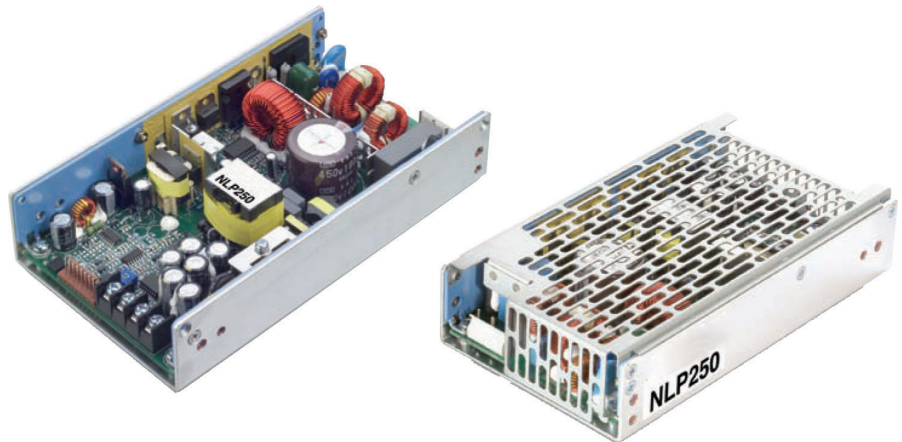

### Electrical Specifications

| Input                                     |                                              |                                                         |
|-------------------------------------------|----------------------------------------------|---------------------------------------------------------|
| Input voltage range                       | Universal input                              | 85 - 264 Vac                                            |
| Input frequency range                     |                                              | 47 - 63 Hz                                              |
| Input surge current                       | 264 Vac (cold start)                         | 40 A max.                                               |
| Safety ground leakage current             | 264 Vac, 50 Hz                               | 150 µA                                                  |
| Input current                             | 120 Vac @ 250 W<br>230 Vac @ 250 W           | 2.78 A rms<br>1.36 A rms                                |
| Input fuse                                | UL/IEC127                                    | T6.4 AH, 250 Vac In live and neutral                    |
| Output                                    |                                              |                                                         |
| Maximum power                             | 200 LFM forced air<br>250 LFM with cover     | 250 watts                                               |
| Adjustment range                          | Main output                                  | ± 5%                                                    |
| Total regulation (line and load)          | Main output<br>Auxiliary outputs             | ± 2.0%<br>± 5.0%                                        |
| Turn-on delay                             | @ 120 Vac Input                              | 2.0 s max.                                              |
| Transient response                        | Main output<br>50 - 100%<br>Step at 0.5 A/µs | 5.0% or 250 mV<br>max. dev., 1 ms max<br>recovery to 1% |
| Temperature coefficient                   |                                              | ±0.02%/°C                                               |
| Overvoltage protection                    | Main output                                  | 115%, ± 5%                                              |
| Short circuit protection                  | Cyclic operation                             | Continuous                                              |
| Minimum output current                    | Singles                                      | 0 A                                                     |
| Auxiliary outputs<br>(See Note 8, page 3) | 5 Vsb<br>12 V (fan)                          | 5 V @ 1.0 A<br>12 V @ 0.3A                              |

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated

| EMC Characteristics <sup>(5)</sup>    |                                                        |                                          |
|---------------------------------------|--------------------------------------------------------|------------------------------------------|
| Conducted emissions                   | EN55022, FCC part 15                                   | Level B                                  |
| Harmonic current correction           | EN61000-3-2                                            | Compliant                                |
| Voltage flicker                       | EN61000-3-3                                            | Compliant                                |
| ESD air                               | EN61000-4-2                                            | Level 3                                  |
| ESD contact                           | EN61000-4-2                                            | Level 3                                  |
| Radiated immunity                     | EN61000-4-3                                            | Level 3                                  |
| Fast transients                       | EN61000-4-4                                            | Level 3                                  |
| Surge                                 | EN61000-4-5                                            | Level 3                                  |
| Conducted immunity                    | EN61000-4-6                                            | Level 3                                  |
| Voltage dips                          | EN61000-4-11                                           | Compliant                                |
| General Specifications                |                                                        |                                          |
| Hold-up time                          | 85 Vac @ 50 Hz                                         | 20 ms @ 250 W                            |
| Efficiency                            | 115 Vac @ 250 W<br>230 Vac @ 250 W                     | 84% typ.<br>86% typ.                     |
| Isolation voltage                     | Input/output<br>Input/chassis                          | 4000 Vac<br>2000 Vac                     |
| Safety approvals (see note 6, page 3) | UL/cUL UL60601-1, VDE EN60601-1, CAN/CSA22.2 No. 601-1 |                                          |
| Weight                                |                                                        | 650g (22 oz)                             |
| MTBF (@25 °C)                         | Telcordia SR-332<br>MIL-HDBK-217F                      | 317,000 hours min.<br>158,000 hours min. |

| Environmental Specifications   |                                                    |                  |
|--------------------------------|----------------------------------------------------|------------------|
| Thermal performance            | Operating ambient,                                 | 0 °C to +70 °C   |
|                                | (See derating curve)                               |                  |
|                                | Non-operating                                      | -40 °C to +85 °C |
|                                | 0 °C to 50 °C ambient,                             | 250 W            |
|                                | 200 LFM forced air<br>250 LFM with cover           |                  |
|                                | 0 °C to 50 °C ambient,<br>0 °C to 40 °C with cover | 175 W            |
|                                | Convection cooled                                  |                  |
|                                | 50 °C to 70 °C ambient,                            | Derate linearly  |
|                                | Convection cooled                                  | to 50% load      |
| Relative humidity              | Non-condensing                                     | 5 - 95% RH       |
| Altitude                       | Operating                                          | 10,000 feet max. |
|                                | Non-operating                                      | 30,000 feet max. |
| Vibration (See Note 7, page 3) | 5-500 Hz                                           | 2.5 G rms peak   |
| Shock                          | Per MIL-STD-810E                                   | 516.4 Part IV    |


## Ordering Information

| Output Voltage | Output Current |                                 |                                   | Ripple <sup>(3)</sup> | Total Regulation | Model Numbers <sup>(9,10)</sup> |
|----------------|----------------|---------------------------------|-----------------------------------|-----------------------|------------------|---------------------------------|
|                | Min            | Max (free air) <sup>(1,4)</sup> | Max (forced air) <sup>(2,4)</sup> |                       |                  |                                 |
| 12 V           | 0 A            | 14.6 A                          | 21 A                              | 120 mV                | ± 2.0%           | NLP250N-99S12J                  |
| 24 V           | 0 A            | 7.3 A                           | 10.5 A                            | 240 mV                | ± 2.0%           | NLP250N-99S24J                  |


### Notes

- 1 Free air convection. Maximum continuous output power not to exceed 175W. Refer to Figure 1 for the derating curve.
- 2 200 LFM (250 LFM with cover) forced air cooling from the longer side. Maximum continuous output power not to exceed 250 W.
- 3 Figure is peak-to-peak for room temperature rating. Output noise measurements are made across a 20 MHz bandwidth using a 6 inch twisted pair, terminated with a 10  $\mu$ F tantalum capacitor and a 0.1  $\mu$ F ceramic capacitor.
- 4 CAUTION: Allow a minimum of 1 second after disconnecting line power when making thermal measurements. For optimum reliability no part of the heatsink should exceed 115 °C and no semi-conductor case temperature should exceed 120 °C.
- 5 No external filtering required during conducted emissions testing but some applications may require additional filtering to achieve system compliance. Compliance with radiated EMI specifications may require mounting in a suitable enclosure.
- 6 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- 7 Three orthogonal axes, random vibration 10 minutes for each axes, 2.4 G
- 8 5 V sb (standby) output is available whenever AC is present, regardless of remote ON/OFF signal status. 12 V (fan) present when main output is present.
- 9 The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. "CJ" suffix indicates covered RoHS version.
- 10 NOTICE: Some models do not support all options. Please contact your local Artesyn Embedded Power representative or use the on-line model number search tool at <http://www.artesyn.com> to find a suitable alternative.
11. This product is a Component Power Supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and System Integrators, including through Distribution Channels. It is not intended for sale to End Users.


## Mechanical Drawing

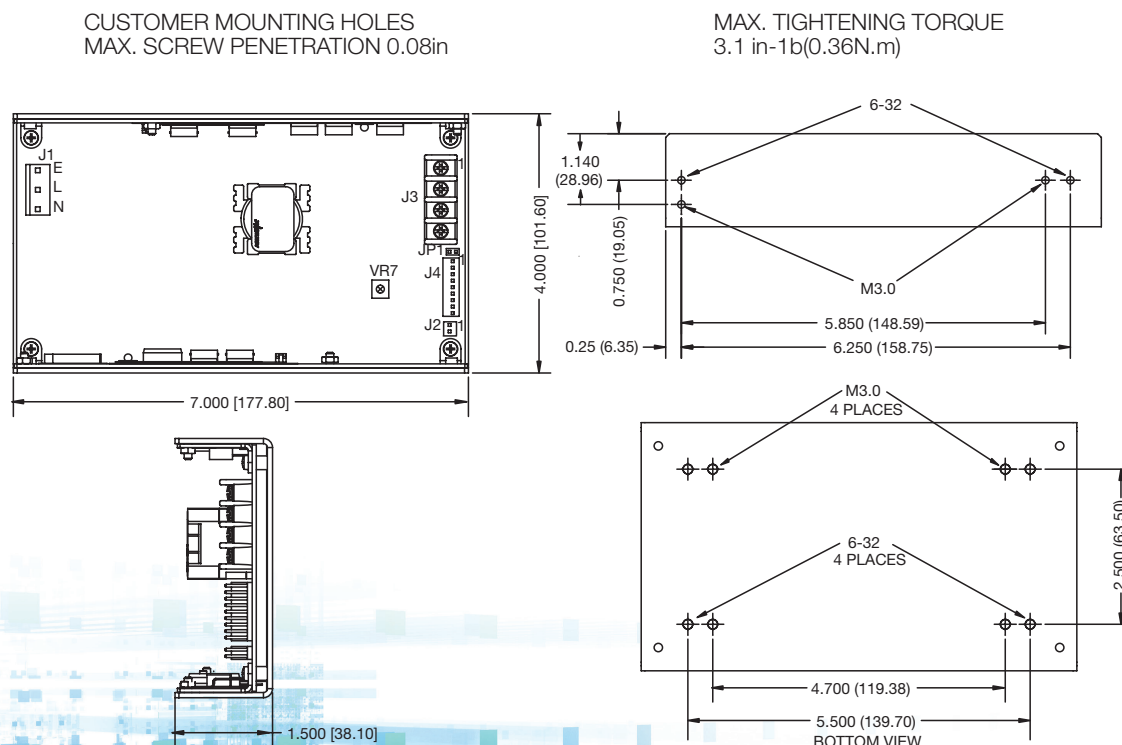

**Figure 1: Derating Curve**  
Output Power (Watts)  
Output Power (Watts)

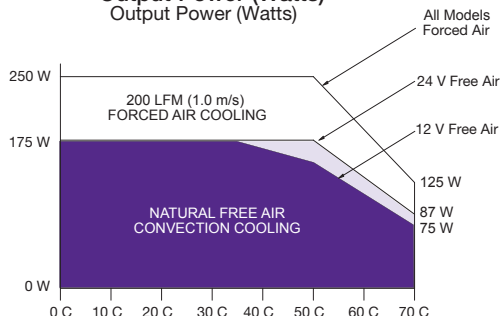

**Figure 1b: Derating Curve With Cover**  
Output Power (Watts)  
Output Power (Watts)

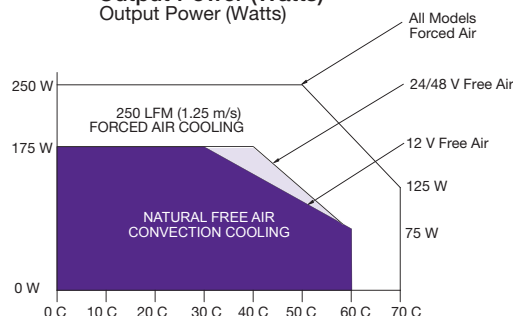

## Connector and Mating Connector Types

| Connector | Type                                                           | Mating Connector Type                                                                                                                               |
|-----------|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>J1</b> | Molex 09-65-2058 (5273 series) void pins 2 and 4 or equivalent | Molex 09-50-8051 or equivalent with Molex 08-52-0113 or equivalent crimp terminals                                                                  |
| <b>J2</b> | Molex 22-23-2021 (6373 series) or equivalent                   | Molex 22-01-3027 (2695 series) or equivalent with Molex 08-50-01113 (2759 series) or equivalent crimp terminals                                     |
| <b>J3</b> | Molex terminal block 387007504 or equivalent                   | Terminal block contains #6-32 screw with clamp washer suitable for wire size 12-22 awg (0.5-2.5 mm <sup>2</sup> ). Max Torque tp 1.36 Nm (12 in.lb) |
| <b>J4</b> | Molex 22-23-2091 (6373 series) or equivalent                   | Molex 22-01-3097 (2695 series) or equivalent with Molex 08-50-0113 (2759 series) or equivalent crimp terminals                                      |

## Pin Connections

| <b>J1</b> |              |
|-----------|--------------|
| Pin 1     | Ground/Earth |
| Pin 2     | Live         |
| Pin 3     | Neutral      |

## Pin Connections Continued

| <b>J2</b> |       |               |
|-----------|-------|---------------|
| Pin 1     | +12 V | Fan Voltage   |
| Pin 2     | SGND  | Return        |
| <b>J3</b> |       |               |
| Pin 1     | Vo    | + Main Output |
| Pin 2     | Vo    | + Main Output |
| Pin 3     | RTN   | Main Return   |
| Pin 4     | RTN   | Main Return   |

## Pin Connections Continued

| <b>J4</b> |        |                         |
|-----------|--------|-------------------------|
| Pin 1     | +S     | +Vo Remote Sense        |
| Pin 2     | -S     | Vo Remote Sense         |
| Pin 3     | LS     | Load Share Signal       |
| Pin 4     | PS OFF | Remote ON/OFF signal NO |
| Pin 5     | PS ON  | Remote ON/OFF signal NC |
| Pin 6     | SGND   | Signal Common           |
| Pin 7     | PW OK  | Power Good              |
| Pin 8     | 5 Vsb  | Stand-by Voltage        |
| Pin 9     | DC OK  | DC Power Good Signal    |

## WORLDWIDE OFFICES

### Americas

2900 South Diablo Way  
Suite B100  
Tempe, AZ 85282, USA  
+1 888 412 7832

### Europe (UK)

Ground Floor Offices, Barbary House  
4 Harbour Buildings, Waterfront West  
Brierley Hill, West Midlands  
DY5 1LN, UK  
+44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN**<sup>TM</sup>  
An Advanced Energy Company

[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com](http://www.artesyn.com)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)

NLP250 Medical DS Rev. 16Dec2019

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Artesyn Embedded Technologies:](#)

[NLP250N-99S12J](#)