

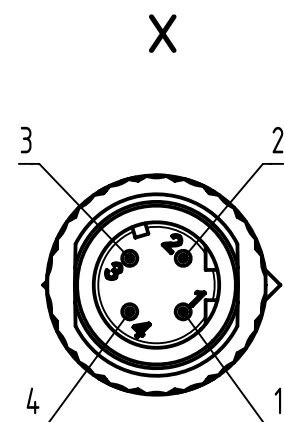
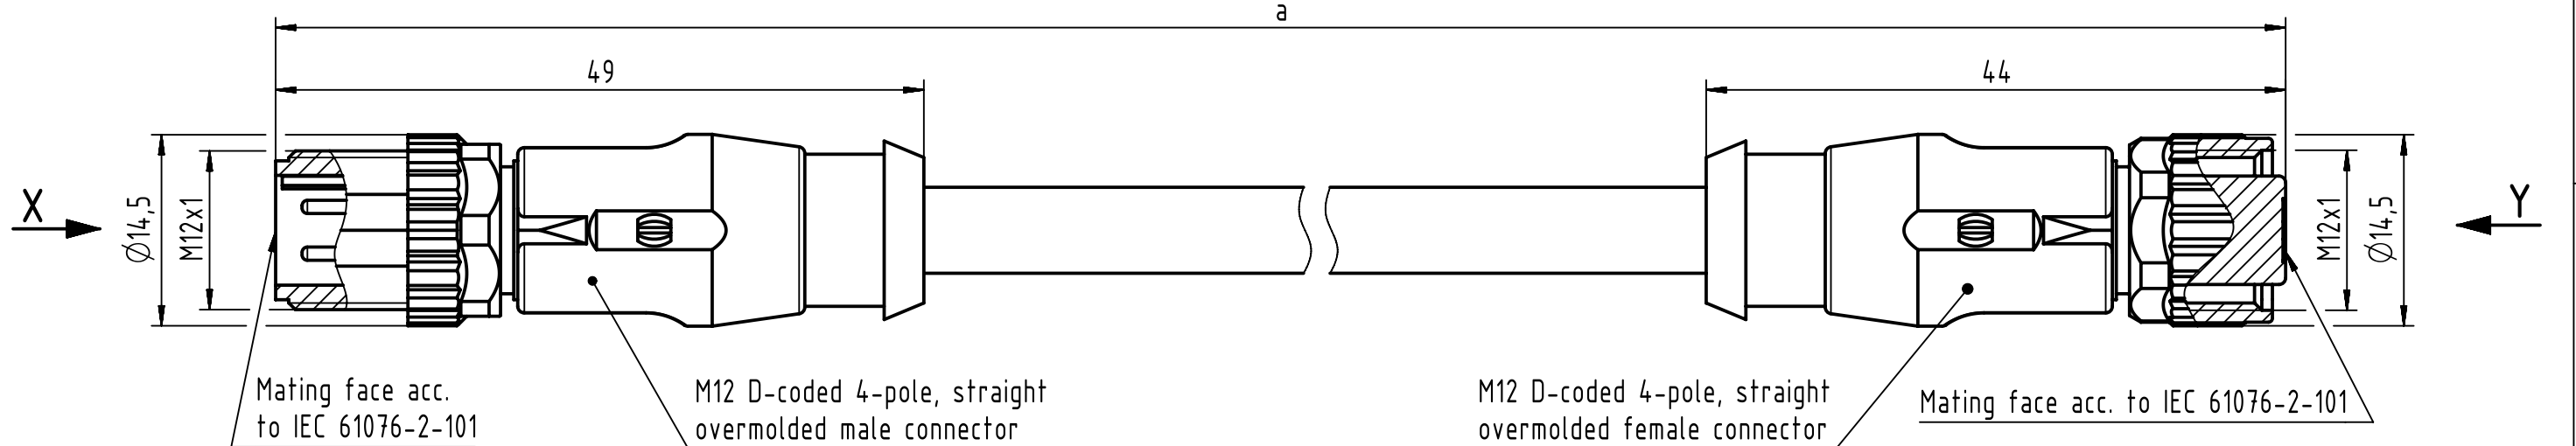
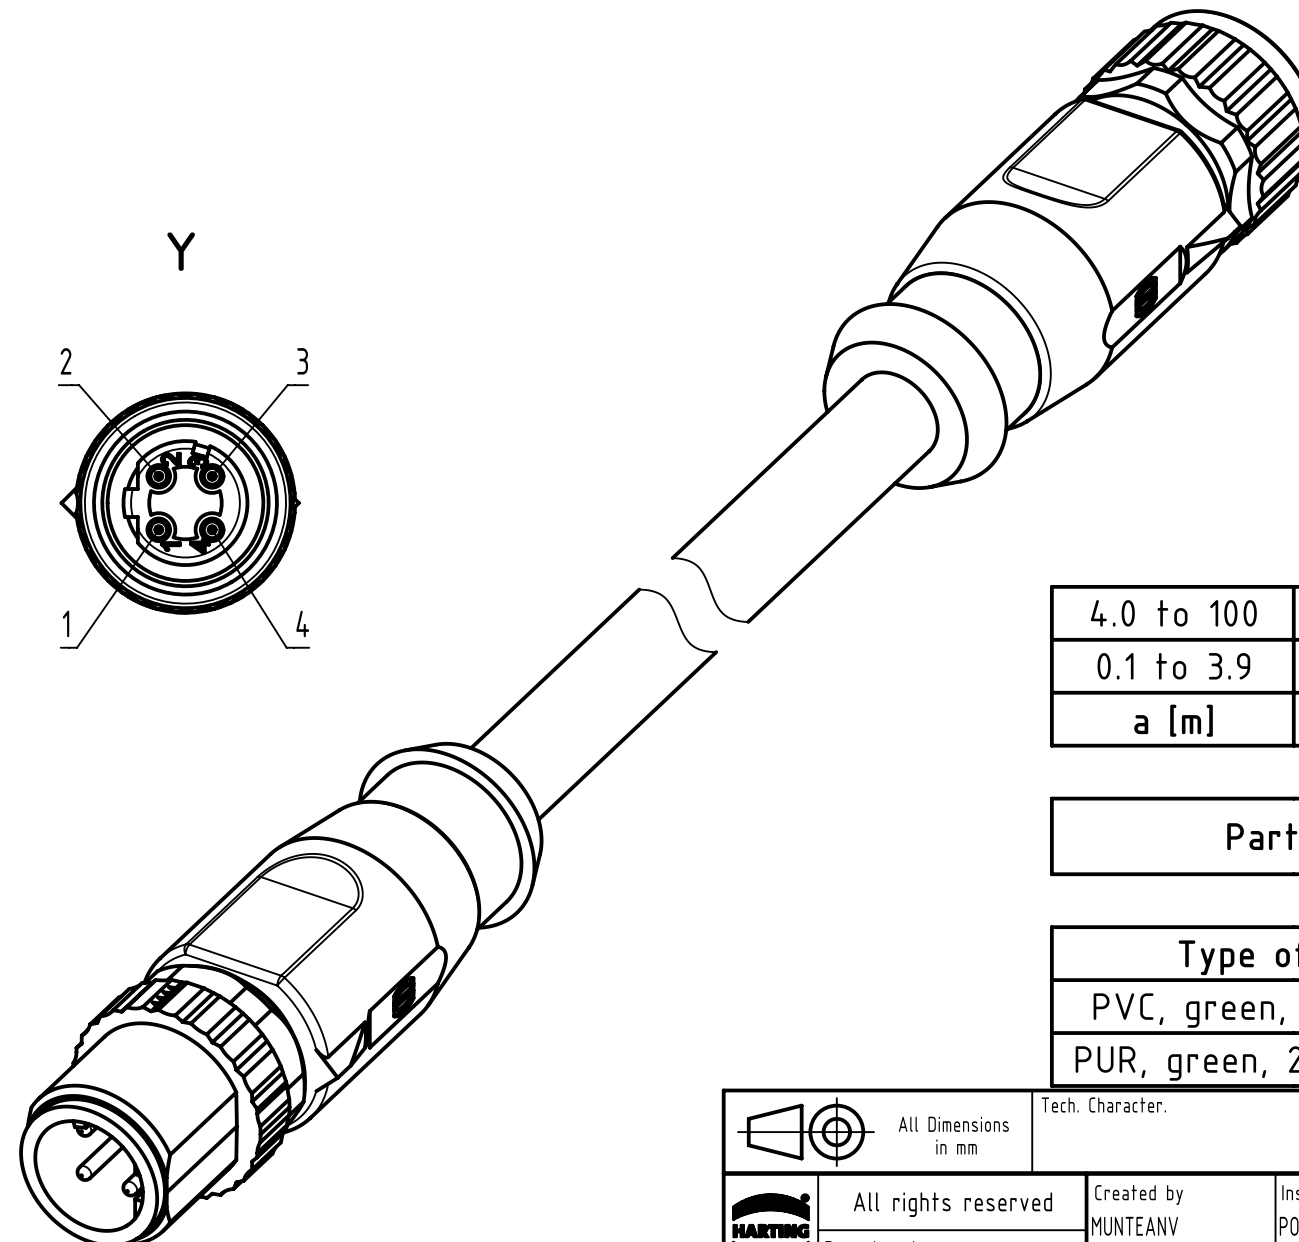


Connector Location A

Connector Location B

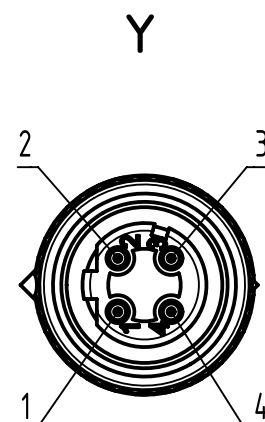

Loading-Plan:



length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
0.1	XXX=001	
Step	a [m]	<u>XXX</u>

4.0 to 100	+1%
0.1 to 3.9	+0.04
a [m]	Tolerance

Part no.	213492934-XX-XXX
----------	------------------

Type of cable	XX
PVC, green, 4xAWG22/7	XX=05
PUR, green, 2x2xAWG22/7	XX=77

- Protection level: IP67
- Temperature range: -30°C ... +70°C

		All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
		All rights reserved		Created by MUNTEANV		Inspected by POPESCUD		Standardisation AVRAM	
Department HCS - RO		Title M12 D-coded Cable Assembly		Date 2017-04-06		State Final Release		Doc-Key / ECM-Nr. 100588517/UGD/000/C 500000117781	
HARTING Customised Solutions D-32427 Minden		Type TB		Number 213492934XXXXX		Rev. C		Page 1/1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[21349293405010](#) [21349293405050](#) [21349293477010](#) [21349293477020](#) [21349293405005](#) [21349293405015](#)
[21349293405020](#) [21349293477015](#) [21349293477050](#) [21349293405075](#) [21349293405100](#) [21349293477100](#)
[21349293477005](#) [21349293477075](#)