

Heyco® Quick Connect Terminals

See pages 8-13 & 8-14 for mating Quick Connect Females.
For Heyco Applicators, see page 8-59

Male Terminal Tabs - .020 gauge







Crimp?	Ref Dwg	PART DATA			PART NO.	APPLICATION TOOLING*				
		Overall Length in.	AWG Range	Material		Die**	Feeds	Crimp Punch	Anvil	
Solder Connection Tabs										
No	4700	.61	Solder	Brass	4700	-	Bulk	-	-	-
Crimp Connection Tabs										
Yes	4710	.61	18	Brass	4710	-	Bulk	-	-	-
		4750		4750UXX5	Left to Right	C458	C463			
	8301	.61	18	Brass	8301	8301UXX5	Right to Left	C460	C465	
Dual Connection Tabs										
No	4720	.69	Dual	Brass	4720	-	Bulk	-	-	-

- All terminals feature a **rectangular “locking tab”** in center for added **strain relief** and **support** when inserted into Female Connector.
- Heyco Terminals meet all your application needs with **solder**, **crimp**, and **dual male** connections.
- DFARS Compliant

* Heyco high volume Application Tooling, designed for 3-5 ton presses - see page 8-59.
Heyco Mini Applicators, designed for 1.5-3 ton bench top presses, are available for Part Nos. 4750 and 4751 only. See page 8-59.

** “XX” represents Wire Gauge. Please specify Wire Gauge when ordering.

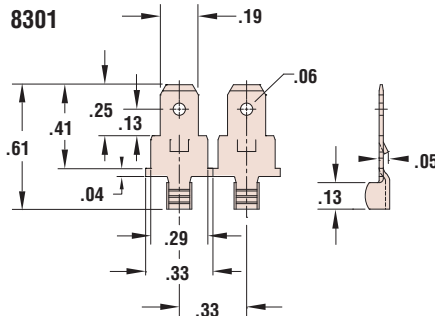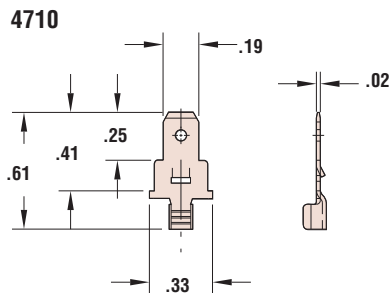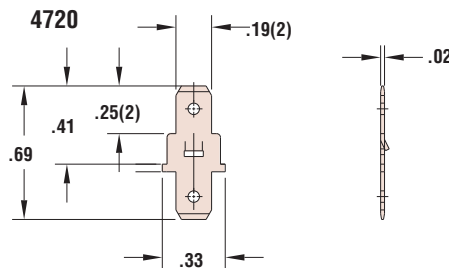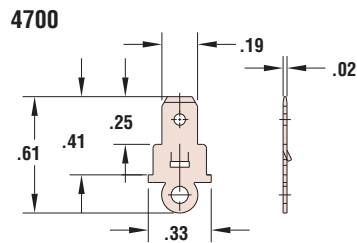

Materials

Alloy 260 Brass (70% Cu, 30% Zn. Higher Cu content resists dezincification)

Quick
Specs

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[4750](#) [4700](#) [4710](#) [4720](#)