

## Interface module - VIP-3/SC/FLK26 - 2315052

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and flat-ribbon cable connector, for mounting on NS 35 rails, with pin strip and short and long locking latches for socket strips, 26-pos.

### Product Features

- 10 to 64-pos.
- Metal foot
- According to IEC 60603-13
- 1:1 connection
- Screw connection



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	150.2 g
Custom tariff number	85369010
Country of origin	United States

### Technical data

#### Dimensions

Width	57.1 mm
Height	69 mm
Depth	62 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

# Interface module - VIP-3/SC/FLK26 - 2315052

## Technical data

### General

Max. perm. operating voltage	60 V AC/DC
Max. perm. current (per branch)	1 A
Number of positions	26
Status display	No
Mounting position	any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Rated surge voltage	0.6 kV
Degree of pollution	2
Overvoltage category	II

### Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

### Connection data for connection 2

Connection name	Controller level
Connection method	IDC/FLK pin strip (2.54 mm)
Number of connections	1
Number of positions	26

### Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Degree of pollution	2
Overvoltage category	II

## Interface module - VIP-3/SC/FLK26 - 2315052

### Classifications

#### eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

#### ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

#### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

### Approvals

#### Approvals

---

#### Approvals

CSA / cUL Recognized / UL Recognized / EAC / EAC / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

#### Approval details

## Interface module - VIP-3/SC/FLK26 - 2315052

### Approvals

CSA 	
mm <sup>2</sup> /AWG/kcmil	30-12
Nominal current IN	1 A
Nominal voltage UN	125 V

cUL Recognized 	
mm <sup>2</sup> /AWG/kcmil	30-12
Nominal current IN	1 A
Nominal voltage UN	125 V

UL Recognized 	
mm <sup>2</sup> /AWG/kcmil	30-12
Nominal current IN	1 A
Nominal voltage UN	125 V

EAC

EAC

cULus Recognized 

### Accessories

Accessories

System cable

## Interface module - VIP-3/SC/FLK26 - 2315052

### Accessories

Cable - VIP-CAB-FLK26/0,14/0,5M - 2318622



Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 0.5 m

---

Cable - VIP-CAB-FLK26/0,14/1,0M - 2318635



Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1 m

---

Cable - VIP-CAB-FLK26/0,14/1,5M - 2318648



Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1.5 m

---

Cable - VIP-CAB-FLK26/0,14/2,0M - 2318651



Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 2 m

---

Cable - VIP-CAB-FLK26/0,14/3,0M - 2318664



Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 3 m

## Interface module - VIP-3/SC/FLK26 - 2315052

### Accessories

Cable - VIP-CAB-FLK26/0,14/4,0M - 2318677



Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 4 m

---

Cable - VIP-CAB-FLK26/0,14/6,0M - 2318680



Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 6 m

---

Cable - VIP-CAB-FLK26-0,14/... - 2318693



Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: Variable

---

Cable - FLK 26/EZ-DR/ 50/KONFEK - 2299385



Round cable set, with two 26-pos. socket strips, (1:1 connection), cable length: 0.5 m

---

Cable - FLK 26/EZ-DR/ 100/KONFEK - 2299398



Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 1 m

## Interface module - VIP-3/SC/FLK26 - 2315052

### Accessories

Cable - FLK 26/EZ-DR/ 150/KONFEK - 2299408



Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 1.5 m

---

Cable - FLK 26/EZ-DR/ 200/KONFEK - 2299411



Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 2 m

---

Cable - FLK 26/EZ-DR/ 300/KONFEK - 2299424



Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 3 m

---

Cable - FLK 26/EZ-DR/ 400/KONFEK - 2299437



Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 4 m

---

Cable - FLK 26/EZ-DR/ 600/KONFEK - 2299440



Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 6 m

## Interface module - VIP-3/SC/FLK26 - 2315052

### Accessories

Cable - FLK 26/EZ-DR/ 800/KONFEK - 2299453



Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 8 m

---

Cable - FLK 26/EZ-DR/1000/KONFEK - 2299466



Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 10 m

---

Cable - FLK EZ-DR.../.../... - 2295059



Round cable, with preassembly, not shielded, variable cable length

---

### Terminal marking

Marker for terminal blocks - UC-TM 4 - 0818111



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter,  
Mounting type: Snap into tall marker groove, for terminal block width: 4.2 mm, Lettering field: 3.6 x 10.5 mm

---

Marker for terminal blocks - UC-TM 6 - 0818085



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter,  
Mounting type: Snap into tall marker groove, for terminal block width: 6.2 mm, Lettering field: 5.6 x 10.5 mm

## Interface module - VIP-3/SC/FLK26 - 2315052

### Accessories

Zack marker strip - ZB 5,08:UNBEDRUCKT - 0809793



Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 5.08 mm, Lettering field: 4.98 x 10.5 mm

---

Zack marker strip - ZB 22:UNBEDRUCKT - 0811862




Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 22 mm, Lettering field: 10.5 x 21.8 mm

---

### Drawings

Circuit diagram

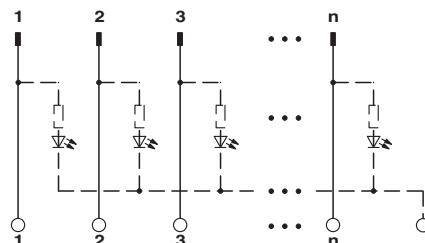

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2315052](#)