


TECHNICAL DATA	RATING AND TYPE	(AMPERE ² SECONDS)				NOM. WATTS LOSS
		PRE- ARCING	TOTAL AT 240V	TOTAL AT V	TOTAL AT V	
Bussmann	SF25H40	50	600			7
RANGE SEMICONDUCTOR	SF25H50	100	1,400			7
	SF25H60	170	2,200			9
REF. SF25H	SF25H75	300	2,850			9
CURRENT RATING	SF25H100	670	8,700			11
40-200 AMPS	SF25H125	1,200	12,000			14
	SF25H140	1,800	18,000			15
	SF25H160	1,800	18,000			18
	SF25H200	2,800	28,000			21
SPECIFICATION						
DRG. No. E5785150						
DATE MARCH 1990						

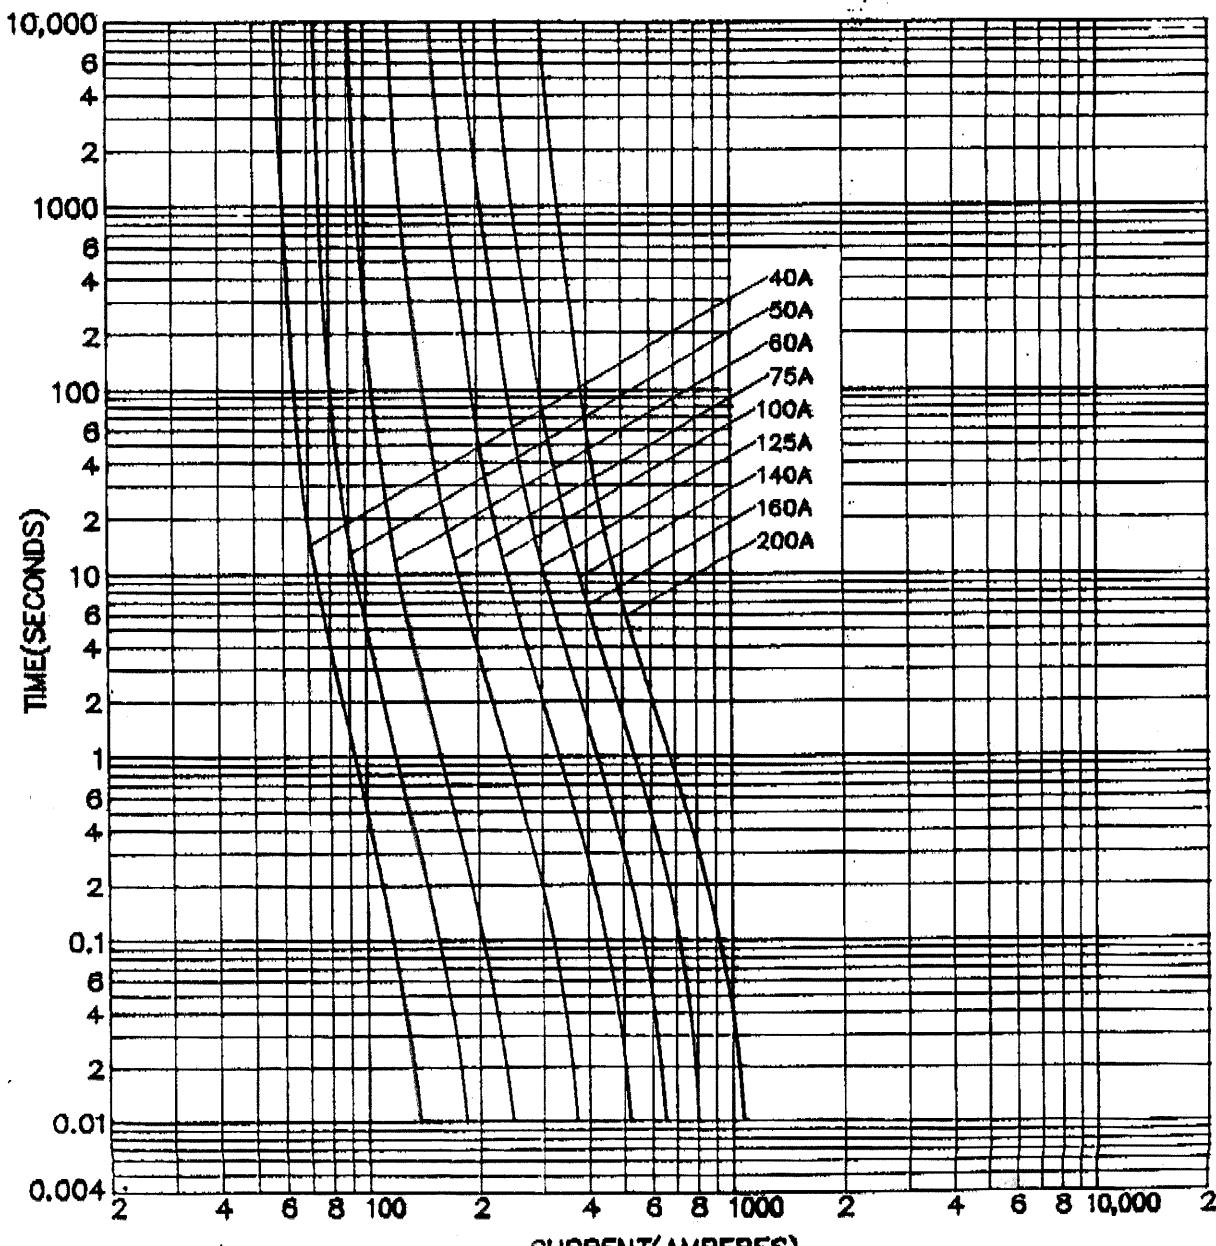

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[SF25H100](#)