


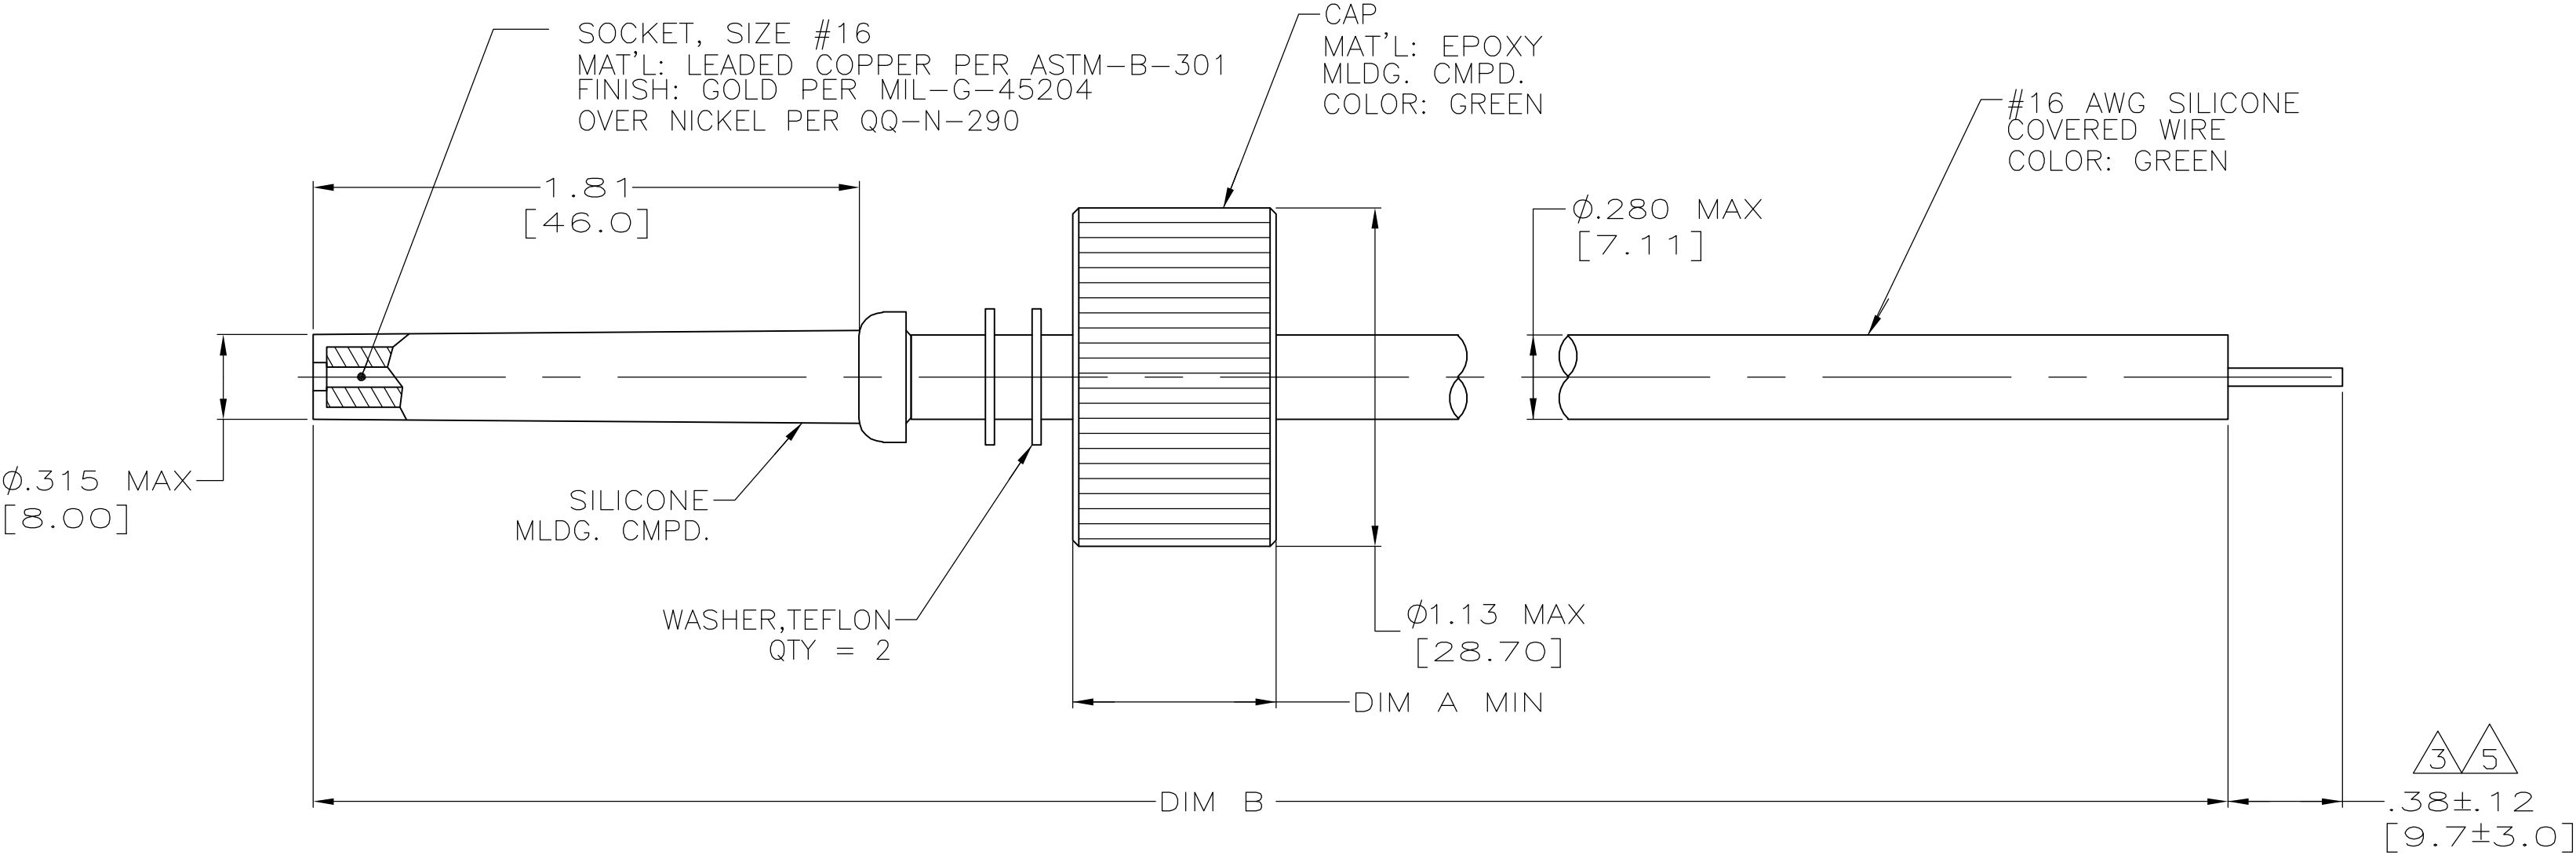

1. MARKED PER MIL-STD-130.
2. LEADS WILL MATE WITH AMP LGH-3. RECEPTACLE WITH 1.81 [46.0] BARREL DEPTH.
- 3 PIGTAIL IS SOLDER DIPPED.
4. OPERATING VOLTAGE: 40 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.
- 5 INSULATION CUT, BUT NOT REMOVED.

5	60.00±1.00 [1524.0±25.4]	67 [17.0]	5-868355-2
3	60.00±1.00 [1524.0±25.4]	.67 [17.0]	868355-2
3	18.00±.12 [457.2±3.0]	.55 [13.8]	868355-1
REMARKS	DIM B	DIM A MIN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 12-9-97	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK D.EABY 12-12-97		
	0 PLC ± -	APVD -	NAME LEAD ASSY, SGL END, LGH-3 WIRE COLOR: GREEN	
	1 PLC ± -	PRODUCT SPEC -		
	2 PLC ± .02 [0.5]	APPLICATION SPEC -		
MATERIAL SEE CALLOUTS	FINISH SEE CALLOUTS	WEIGHT -	SIZE A2	CAGE CODE 00779
CUSTOMER DRAWING		DRAWING NO C=868355	RESTRICTED TO -	REV C
		SCALE 2:1	SHEET 1 of 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[868355-2](#)