
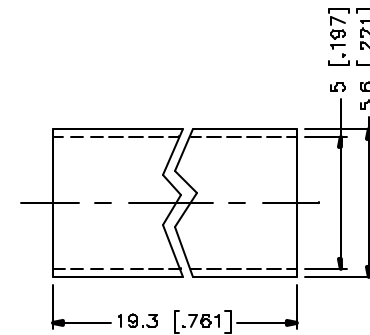

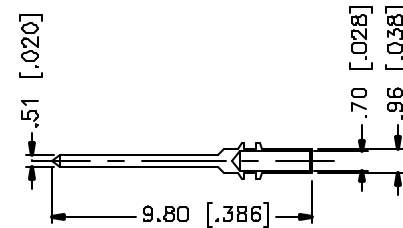
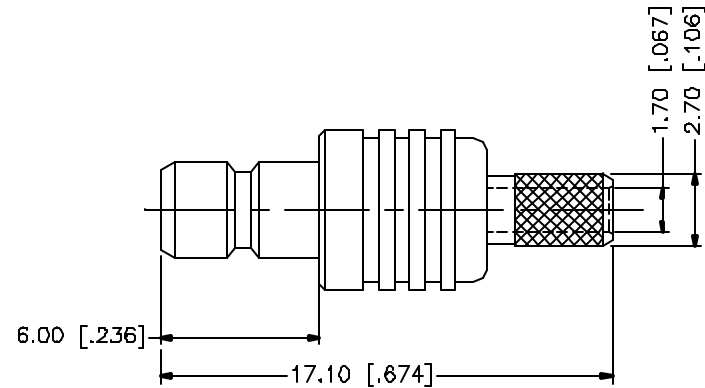


REV.	DATE	DESCRIPTION
NC	08/27/04	INITIAL RELEASE

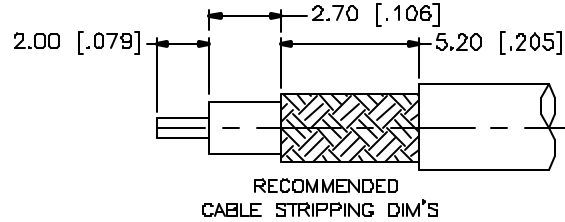

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8					DRAWN	G.R.S.	08/27/04						
7					CHECKED				PART DESCRIPTION SMB MINI 75ohm CRIMP JACK (FOR RG-179 BOUBLE BRAID CABLE)				
6					ISSUED								
5	HEAT SHRINK TUBE				1	SHEET	1 OF 1			PART NO. 142190-75			
4	FERRULE	COPPER	GOLD		1								
3	CONTACT PIN	BRASS	GOLD		1				DWG. NO. 142190-75.DWG				
2	INSULATOR	TEFLON	NATURAL	1				REV. NC					SIZE A
1	BODY	BRASS	GOLD	1									
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE C:/142/142190-75.DWG					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[142190-75](#)