


PANDUIT PART NUMBER	COPPER CONDUCTOR SIZE	LOCOMOTIVE CONDUCTOR SIZE	BARREL		OVERALL LENGTH "A"	WIRE STRIP LENGTH	PANDUIT PART NUMBERS
			I.D.	O.D.			CT-920, CT-920CH, CT-930, CT-930CH, CT-940CH*, CT-2920 CT-2940*
							DIE PART NO./ DIE SET COLOR & INDEX NO./ NUMBER OF CRIMPS
SCSF8-L	-----	37/24	0.18	0.27	1.50	11/16	CD-920-8 RED P21 1 CRIMP
SCSF6-L	#6 WELD CLASS K & M	61/24	0.22	0.31	1.75	13/16	CD-920-6 BLUE P24 1 CRIMP
SCSF4-L	#4 WELD CLASS K & M	105/24	0.28	0.38	1.75	13/16	CD-920-4 GREY P29 1 CRIMP
SCSF2-E	#2 WELD CLASS K & M	150/24	0.36	0.47	1.87	7/8	CD-920-2 BROWN P33 1 CRIMP
SCSF1-X	#1 WELD CLASS K & M	225/24	0.39	0.52	1.87	7/8	CD-920-1/0 PINK P42 1 CRIMP
SCSF1/0-X	1/0 WELD CLASS K & M	275/24	0.45	0.58	2.50	1-3/16	CD-920-2/0 BLACK P45 2 CRIMPS
SCSF2/0-X	2/0 WELD CLASS K & M	325/24	0.51	0.64	2.50	1-3/16	CD-920-3/0 ORANGE P50 2 CRIMPS
SCSF3/0-X	3/0 WELD CLASS K & M	450/24	0.57	0.71	2.50	1-3/16	CD-920-4/0 PURPLE P54 2 CRIMPS
SCSF4/0-X	4/0 WELD CLASS K & M	550/24	0.63	0.77	2.50	1-3/16	CD-920-250 YELLOW P62 2 CRIMPS
SCSF250-X	250 WELD CLASS K & M	650/24	0.70	0.88	2.50	1-3/16	CD-920-300 WHITE P66 2 CRIMPS
SCSF300-6	300 WELD CLASS K & M	775/24	0.76	0.95	2.56	1-1/4	CD-920-350 RED P71 2 CRIMPS
SCSF350-6	350 WELD CLASS K & M	925/24	0.84	1.06	2.94	1-1/4	CD-920-400 BLUE P76 2 CRIMPS

*CD-920 DIES CAN BE USED WITH CT-940CH AND CT-2940 TOOLS WITH CD-940-DA DIE ADAPTER



- NOTES:
- 1. MATERIAL: HIGH CONDUCTIVITY SEAMLESS COPPER TUBING
 - 2. ELECTRO -TIN PLATED
 - 3. BARREL COLOR CODED WITH DIE SET INDEX NUMBER
 - 4. UL LISTED WITH LOCOMOTIVE & WELD CABLE CONDUCTORS FOR APPLICATIONS UP TO 35KV, FILE E52164
 - 5. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS
 - 6. CSA CERTIFIED FOR APPLICATIONS UP TO 600V, FILE LR31212
 - 7. FOR USE WITH COPPER CABLES ONLY

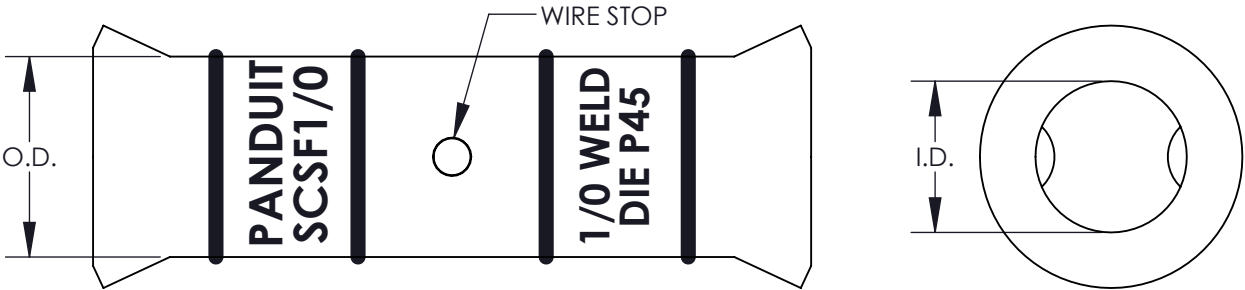

									PANDUIT CORP. TINLEY PARK, ILLINOIS		
									SCSF #8 - 350 COPPER SPLICES CUSTOMER DRAWING		
02	6/11	JHNU	RGB	REVISED PART NUMBER: SCSF2-E WAS SCSF2-Q	N41158BA-C41158	RGB	RGB	UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION	
01	4/01	BDK		ADDED THE LETTER "P" TO THE DIE INDEX NUMBER, COMBINED EXISTING TOOL CHART COLUMNS, RELOCATED DIE ADAPTER NOTE, FILESPEC WAS N41158CB_PCD							
00	6/95	WB	WJB	DRAWING RELEASED	03378	KS	LA	DRAWN BY WJB	MAT'L:	SCALE NONE	
REV	DATE	BY	CHK	DESCRIPTION	ECN	-R	SUP	DATE 6/95	CHK'D	DRAWING NO / CAD FILE C41158_02	DWG B SIZE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[SCSF8-L](#) [SCSF2-E](#)