

Thermometrics temperature sensor solutions

AmphenolAdvanced Sensors

Global Excellence in Temperature Sensors

The Thermometrics temperature product line contributes more than 70 years of technology experience in the design and manufacture of high quality sensors to the Amphenol Advanced Sensors portfolio of sensor-based solutions.

Thermometrics pioneered lead frame technology, unifying the probe terminal and thermistor lead into a single constructed metal substrate. This innovation was the building block to today's fully automated volume production process, which ensures the highest degree of quality and performance.

Thermometrics continues to invest in leading edge temperature sensor and sensor packaging technology for the Thermometrics product line, particularly in developing custom solutions for industry and for specific customer application needs. From chips to value-added assemblies and for temperature ranges from -196°C to 1150°C, Thermometrics products play a vital role in measurement, control and protection of industrial- and consumer-based applications worldwide.



High-Performance, Competitively Priced Products for a Wide Range of Applications



Aerospace

- Anti-icing
- Environmental control systems
- Temperature scanning systems



Transportation

- Engine management
- Dashboard display sensors
- Cabin comfort sensors—non-contact infrared, solar and light
- Circuit protection
- Safety systems
- Coolant/transmission fluid pressure/temperature
- Exhaust gas temperature
- Air quality
- Active/passive incar

Commercial

- High voltage and short circuit protection
- HVAC
- Energy management
- Liquid level detection
- Telecommunications equipment
- Computers
- Office machines



Industrial

- Circuit protection
- Temperature measurement and control
- Liquid level detection
- High voltage protection
- Short circuit and other hazard protection
- Process control
- Boilers and water heaters

Consumer Electronics

Level control

Overload protection

• Food and beverage

• Boilers and water heaters

Appliances



Healthcare

- Tympanic temperature
- Heart/lung machines
- Thermal dilution catheters (heart)
- Urinary catheters
- Oral and skin temperature
- Sleep apnea
- Esophageal catheters
- Glucose monitoring
- · Body mapping
- Oxygen tents
- Clinical mattresses
- Humidifiers
- Anesthesia
- Fluid heaters
- Sterilizers
- Culture ovens
- Cryogenics



Calibration Services

- Primary temperature standard
- NIST calibration services

Critical Information for Real Time Decisions



For Flight

From cabin comfort to test cell systems monitoring, our sensors play a role in temperature measurement for commercial, civil and military aerospace applications—fixed-wing and rotary, and both engine and airframe.

Sensors monitor engine thrust, reliability and emissions in test cells, while also monitoring test cell throughput. In the cabin, our HVAC sensors provide climate control for a comfortable environment while a variety of other sensors monitor temperature in appliances like coffee makers, microwaves and refrigerators.

On the Road

Today's increasingly complex engine management systems rely upon sensors to monitor, measure and control vehicle performance including fuel economy, safety, and control of exhaust emissions.

Our comprehensive product range includes temperature sensors for use in coolant or transmission fluid; high temperature sensors to measure exhaust gas temperature; IR, gas and humidity sensors for cabin comfort; and solar and light sensors.

Our single-piece leadframe construction reduces the number of interconnections and ensures more reliable performance.

At the Office

Electronic circuitry and sensitive system components demand thermistor protection and control. Our custom-design capability and problem solving expertise mean that we can offer innovative solutions in circuit protection; and temperature measurement and control.


Our sensors excel at applications such as process control energy management, HVAC systems, power supplies, transformers, motor soft start and general time delay units. They are used to control critical process temperature.

Our simple-to-integrate sensors are designed to meet the rapidly changing demands of deregulated and global markets for high-technology sensors.







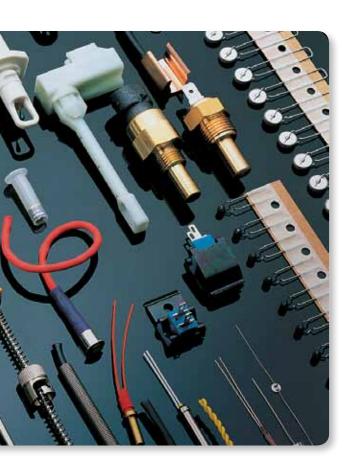

Around the Home

Today's consumers expect their everyday appliances to deliver reliable and efficient performance. Electronic sensors offer improved accuracy over electromechanical solutions and are designed to perform over a very wide range of temperatures and specifications. Our sensors play a vital part in measuring and controlling the temperature of water, steam, air and food. They are also used for flow measurement, level control, and overload protection and in combination with other sensors for multiple functions.

Temperature sensors can be found all around the home in boilers and water heaters, washing machines, dishwashers, stoves, microwave ovens, irons, toasters, refrigerators and deep freezers.



For Healthcare

We have developed state-of-the-art, high-performance sensors known for their accuracy, reliability and small size. Used extensively for heart catheters, esophageal stethoscopes, fever thermometers, skin sensors. blood analyzers, incubators, respiration monitors and hypodermic needle sensors, they help meet many temperature-related requirements. Innovative work on small precision sensors continues for cancer research. Thermistors measure the temperature of cells and with precise monitoring, doctors can use heat to destroy diseased cells in tumors.



In the Plant

Our custom-design capability and problem solving expertise mean that we can provide innovative solutions in circuit protection, temperature measurement and control, liquid level detection and gas flow measurement. We have one of the most extensive product ranges of industrial temperature sensors in the world. With new markets emerging worldwide, our global sensor manufacturing centers meet local content demands and allow us to exceed specific customer requirements. Along with the best manufacturing and test equipment, our strict manufacturing processes and quality procedures ensure the highest standards for your applications.




NTC or PTC?

Thermistors are thermally sensitive resistors with either a negative resistance/temperature coefficient (NTC) or positive resistance/temperature (PTC) coefficient. Thermometrics offers a wide range of both types of thermistors from component level through complete assemblies. Both types of thermistors are solid state ceramic components, known for their exceptional quality and long life.

NTC Thermistors

NTC thermistors are manufactured from the oxides of transition metals and can operate over the range of -196°C to 1000°C. Choose an NTC thermistor when a continuous change of resistance with temperature is required.





What are the key characteristics of NTCs?

- Defined sensitivity to temperature
- Sensitivity to electrical power input
- Sensitivity to changes in thermal conductivity


What are the main applications for NTC thermistors?

- Temperature measurement and control
- Temperature compensation
- Surge suppression
- Power measurement
- Fluid level-flow detection
- Customized solutions

PTC Thermistors

PTC thermistors are temperature-dependent resistors manufactured from doped barium titanate and are available with transition temperatures from 60°C to 200°C. Choose a PTC thermistor for self reset-capable fuse and heater applications.





What are the key characteristics of PTCs?

- Large change in resistance at a preset temperature
- Ability to self-regulate temperature
- Current-limiting capability
- Sensitivity to changes in thermal conductivityw
- Standard and custom design geometries

What are the main applications for PTC thermistors?

- Over-temperature protection
- Over-current protection
- Surge generation
- Current stabilization
- Fluid level-flow detection
- Self regulating heaters

Thermometrics is a world leader in beta curve selections and high voltage circuit applications.


NTC Thermistors

Description	Codes	^T emperat	^{Temperat}	Surge Sur	Power Mg	Fluid Leve	Key Features	Typical Uses
Epoxy and silicone-coated chip thermistors	TK95 DC95 EC95 MC65 MF65 SC30 SC50 ND NK MS C100 NDK NDP NDM NDL TC	✓	✓			√	Interchangebility options down to ±0.1°C accuracy 0 to 100°C range Head size 0.8 to 2.4 mm Automated assembly	Automotive engine management, air conditioning, medical, clinical thermometers, blood analysis
Glass encapsulated DO-35 package	DK GE TH	✓	✓				 Tmax 300°C Hermatic seal High voltage insulation Bandoliered for auto PCB insertion 	Battery packs, toasters, hair dryers, automotive transmissions, smoke detectors, environmental control
Discs with radial leads	RL10 RL14 RL20 RL30 RL35/40/45	✓	✓	✓			 Operation at high currents Wide range of resistance vs temperature curves Custom design 	Automotive engine temperature, temperature compensation
Discs for inrush current limiting	CL TP T5D			✓			 Continuous current ratings 1.1 to 16 A Cold resistances 0.7 to 120 W Some UL-approved versions 	Soft start for switch mode power supplies, filament lamp circuits
Suface mount chips	NHQ NHQM NHQMM TM	✓	✓				 0402,0603, 0805, 1206 sizes Ni barrier terminations Resistance tolerances down to ±1% 	Rechargeable battery packs, LCD temperature compensation

NTC Thermistors

Description	Codes	remp	Tempe	Surge	Power	Fluid	Key Features	Typical Uses
Glass-encapsulated suface mount chips	DKM MELF	✓	✓				Tmax 250°C Suitable for harsh environments and soldering profiles	SMD circuitry
Bare bead thermistor	BB05/07/11	✓	✓		✓	✓	Fast time constant, 0.11 secs Extremely small size 0.13 to 0.25 mm High stability	RF & microwave power measurements
Glass-coated beads	B05/07/10/14 B35/43	✓	✓		✓	✓	 Hermetically sealed Small size, 0.13 mm to 1.1 mm Tmax 300°C 	Gas chromatography, thermal conductivity analysis, gas flow measurement, liquid level sensing
Glass-encapsulated beads, rods, probes	BR11/14/16/23 BR32/42/55 P20/25/30 P60/65/85/100 R60/65/85/100 SP60/65/85/100 FP07/10/14	✓	✓	✓		✓	Robust Hermetically sealed Tmax 300°C Interchangeable matched pairs available Some models with intermittent operation to 600°C	Liquid level sensing, gas flow measurement, fluid temperature, pulse suppression
Glass encapsulated chips with leads	GC32 GC14/16 GC11	✓	✓	✓		✓	Long-term stabilityChip technologySizeResponseAccuracy	Medical catheters military/aerospace, airflow, blood analysis
Leadless chip thermistors	NDU HM	✓	✓				 Silver or gold electrodes suitable for wire bonding Small size 	Hybrid circuits, glucose monitors, digital thermometers

NTC Thermistors

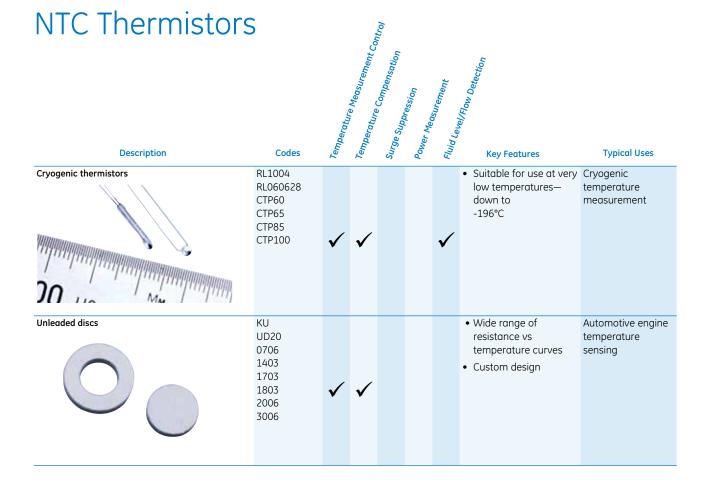

PTC Thermistors

Description	Codes	Over Tem	Over Curre	Surge Ger	urent s.	Fluid Level	elf Regula*:	Key Features	Typical Uses
Motor protection	YA	0	0	ري ري	Ü	T.	S	Small insulated head	Protection of
	YB YC YD YF YG PTD	✓						 Long insulated flexible wire Switch temperatures 30 to 180°C DIN compliance MOD approval 	industrial motors and transformers, submarine motors
Surface sensors	YK							Screw-in or bolt-on	Semi-conductor
	YR PTA PTE	✓						configurations • Flexible or solid wire • Switch temperature 30 to 140°C	heat sinks, enclosure panels, power supplies
Wired devices - general purpose	YM120							• Ratings up to 1000	Transformer
	YP YS4019 YS4020 PTF PTO		✓	✓	✓			Vrms • Switch currents up to 2A	protection, electronic lighting, instrument/DMM protection
Surface mount devices	YSM							High power SMD PTCs	
P\$3	YSM 4021 PTSM		√	√	√			Compatible with SMD assembly Ratings up to 1000 Vrms	protection, DMM instrument protection, electronic lighting control
								 Switch currents up to 2A Conformance to ITU-T K20/21 	
Circuit protection	YS	✓	✓		✓			 Custom designed for electronic circuit applications Excellent thermal shock and power handling performance Conformance to ITU-T K20/21 	Telecom primary and secondary protection

PTC Thermistors

Description	Codes	Over Tem.	Over Cure.	Surge Ger	Current St.	Fluid Level.	Self Requi	Key Features	Typical Uses
Self-regulating heaters	YH PTH						✓	3	Medical equipment, in-line diesel fuel heaters, LCD heaters, stabilization of electronic components, wax motors, saw devices, air fresheners outside camera lenses
Liquid level sensing	YL JYA					✓		 Water resistant housing High sensitivity Axial and radial formats 	Tea urns, fuel storage systems, industrial plants, laboratory water stills, vending machines


Probes and Assemblies

Parasitation .		rempera	rempera	Surgesu	Power M	Fluid Lev		
Description	Codes	70	70	25,	۵	17		Typical Uses
General purpose sensors	GT JA JB JE JF JP M series T series	✓	✓			✓	 Tmax 225°C Range of fittings 	Domestic ovens, combination microwave ovens, industrial process control
Fast response surface sensors	JC JW JD JS2945 Substrate	✓					 Response time down to 250 ms Voltage insulation 1500 V Environmental protection Pipe ranges 13 mm to 22 mm 	Gas boiler control, domestic water systems, air conditioners, showers, vending machines, radiator inlet- outlet, automotive temperature sensing, aerospace de-icing
Refrigeration, low temperature	JL JM JI EVAP A1424 EVAP for HVAC A1447-A1450	✓					Low temperature Resistant to moisture ingress	Low temperature appliances, air conditioning evaporators, industrial and domestic refrigeration, automotive
Eyelet	JR M2000	✓					 Ease of installation M3, M4, M5 eyelet sizes 	Semiconductor heatsinks, enclosure panels, surface temperature measurement, PC fan control, power supplies, air conditioning ducts
Medical products	Custom assemblies	✓				✓	Clinically approved materials	Thermometer probes, catheters, skin sensors, fluid flow

Probes and Assemblies

Description	Codes	тетре	Tempe	Surge	Power	Fluid	Key Features	Typical Uses
Medical products	AB6 MA100 MA400	✓					 Clinically approved materials Custom designs Size Accuracy 	Medical catheters (thermodilution, esophageal, foley, ablation), vital sign monitors
Automotive subassemblies	Lead frame	✓	✓				 Designed for automated assembly Reduced overall sensor cost Enhanced reliability 	Automotive engine temperature
Automotive assemblies	Brass assemblies, etc.	✓	✓				 Custom designed In-house overmolding capability Large variety of connector options 	Automotive coolant temperature indication
Composite NTC/PTC	KY	✓					Constant resistance over normal operating temperature range (accomplished by using NTC/PTC paired thermistors)	Automotive coolant dashboard sensor

Additional Technologies and Accessories

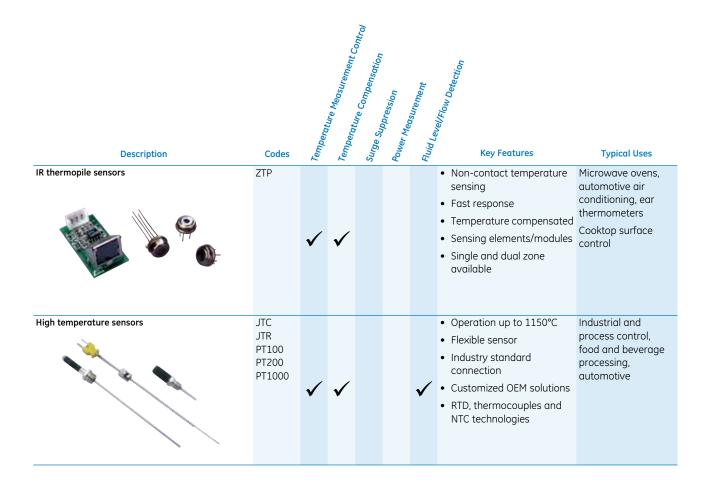

About us

Amphenol has united the technological innovation and experience of industry leaders in the design and manufacture of advanced sensing solutions into one world-class business.

Amphenol Advanced Sensors sensing products measure temperature, pressure, liquid level, moisture and humidity, gas concentration, and flow rate for applications ranging from environmental, medical, and pharmaceutical to automotive, and aerospace.

Amphenol Advanced Sensors offers industry leading domain expertise, rapid customization, world-class manufacturing capability and lasting customer relationships to deliver the greatest value in cost of ownership to their customers.

Temperature, humidity, pressure, CO₂, light



Pressure



Temperature



Gas



Humidity





www.amphenol-sensors.com

© 2014 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

RL5510-25-60-120-PTO RL2006-100-120-30-PTA RL1005-2910-97-SP RL3510-100-110-120-PTF RL1004-25-120-12-PTF RL3005-25-110-12-PTF RL5506-5-65-50-PTO JC103C3R5/13 JC103C3R5/17 JC103C3R5/20 JC103C3R5/F JC103C4R5/13 JC103C4R5/17 JC103C4R5/20 JC103C4R5/F JC502C3R5/13 JC502C3R5/17 JC502C3R5/20 YS5918PTO YS5869PTF YS5876PTF RL0503-5820-97-S17 YS6176 YS5940PTH YS5941PTH YS6101 YS5675 YS5677 YS5656