


	10	9	8	7	6	5	4	3	2	19213
	MATERIAL NUMBER	ENGINEERING NUMBER	AWG WIRE RANGE	LENGTH "L" MAX	PIN LENGTH "P" MIN (B1)	PIN DIAM. "D" ±.01/0.3	MWID	INSULATION COLOR	B MAX	
	192130001	WP-5210	12-10	1.24/31.5 (B1)	.35/8.9	.107/2.72	.22/5.6	YELLOW	.68/17.3	
	192130005	WP-5614	16-14	1.05/26.7	.35/8.9	.078/1.98	.17/4.3	BLUE	.55/14.0	
	192130003	WP-5218	22-18	1.05/26.7	.41/10.4	.078/1.98	.14/3.6	RED	.55/14.0	

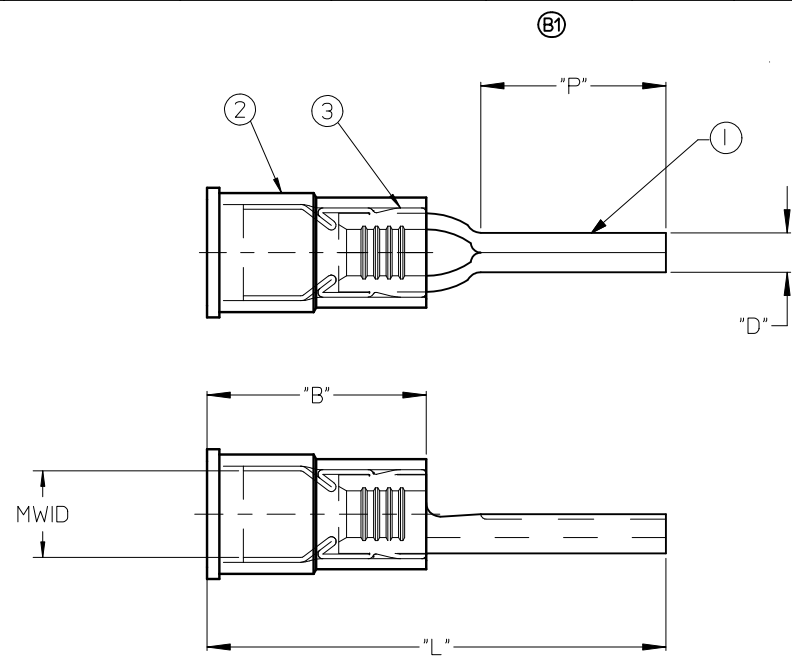

3	1	FERRULE PLATED	COPPER ALLOY	TIN PLATING
2	1	600V AVIK MLD INS	NYLON	SEE CHART
1	1	WIRE PIN KRIMP TITE	COPPER C11000	TIN PLATING
ITEM	QTY	DESCRIPTION	MATERIAL	FINISH

- NOTES:
- 1. MATERIAL: SEE CHART
 - 2. FINISH: SEE CHART
 - 3. PARTS ARE ROHS COMPLIANT.
 - 4. MWID = MAXIMUM WIRE INSULATION DIAMETER

CORRECT TOLERANCES

EC NO: WNA2009-0437

DRW: NETHRODAHL 2010/02/19

CHKD: JMACNEIL 2010/03/01

APPR: JMACNEIL 2010/03/18

B1

DESCRIPTION

REV

QUALITY SYMBOLS

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±---
1 PLACE	±---	±---
ANGULAR ±---°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

IN/MM

DRAWN BY ASAYDEH

DATE 06/03/17

CHECKED BY RDEROSS

DATE 06/03/17

APPROVED BY JMACNEIL

DATE 2010/03/18

MATERIAL NO.

SEE CHART

SIZE B

SCALE

4:1

TITLE

AVIKRIMP WIRE PIN TERMINAL

MOLEX INCORPORATED

DOCUMENT NO. SD-19213-001

SHEET NO. 1 OF 1

DESIGN UNITS

INCH

THIRD ANGLE PROJECTION

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[19213-0001](#)