


1. MAX INSERTION LOSS: 1.0dB (1310um)
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

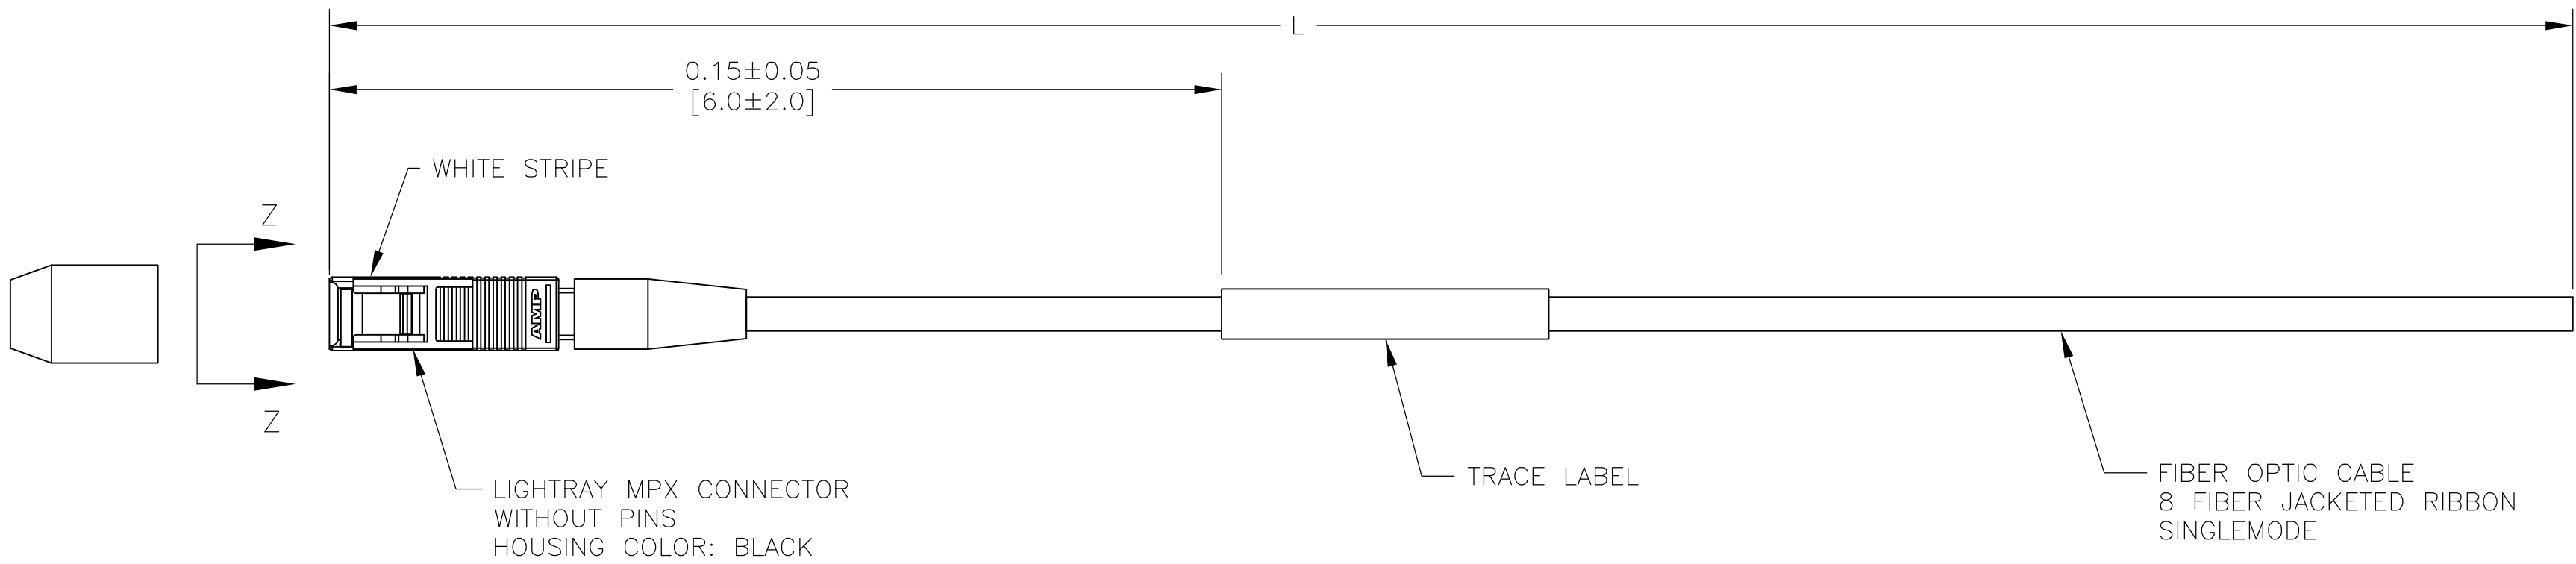

VIEW Z-Z  
NOT TO SCALE

FIBER NO	COLOR
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	SLATE
6	WHITE
7	RED
8	BLACK

12.000	+0.120/-0.000	[472.4 +4.7/-0.0]	1-6754258-2
10.000	+0.100/-0.000	[393.7 +4.0/-0.0]	1-6754258-0
5.000	+0.076/-0.000	[196.9 +3.0/-0.0]	6754258-5
3.000	+0.076/-0.000	[118.1 +3.0/-0.0]	6754258-3
2.000	+0.076/-0.000	[78.7 +3.0/-0.0]	6754258-2
1.000	+0.076/-0.000	[39.4 +3.0/-0.0]	6754258-1
L METERS [INCHES]			PART NUMBER

LIGHTRAY MPX CONNECTOR FIBER PATH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KATHY HE	28DEC05	<b>tyco</b> <b>Electronics</b>		Tyco Electronics Corporation Harrisburg, PA 17057	
DIMENSIONS: METERS [INCHES]		CHK J.BARRY	03JAN06	NAME			
		APVD J.BARRY	03JAN06	PIGTAIL, FIBER OPTIC, 8 FIBER SINGLEMODE JACKETED RIBBON, LIGHTRAY MPX (NO PINS)			
		PRODUCT SPEC	—				
		APPLICATION SPEC	—				
MATERIAL —		FINISH —	WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C-6754258	RESTRICTED TO —
CUSTOMER DRAWING			SCALE NTS	SHEET 1	OF 1	REV A1	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6754258-3](#)