
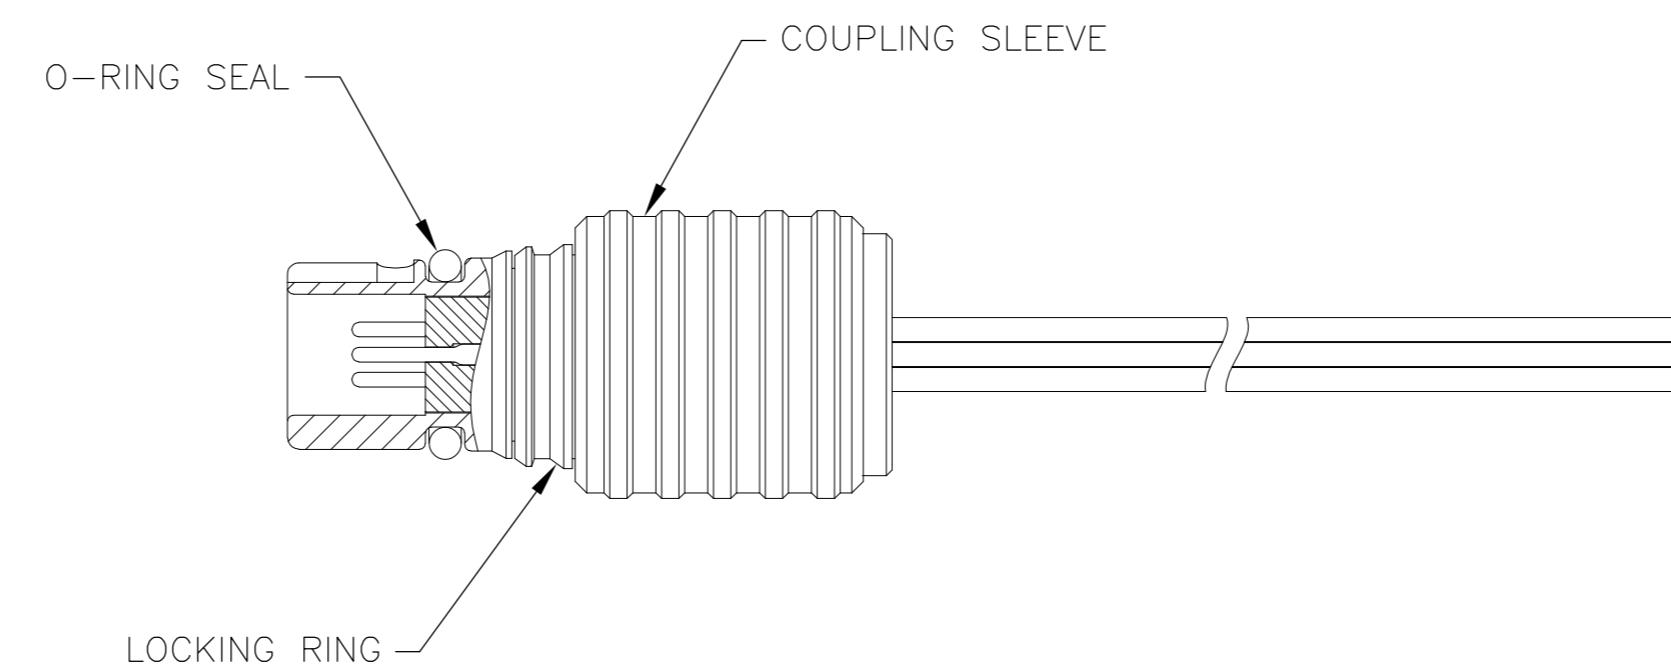
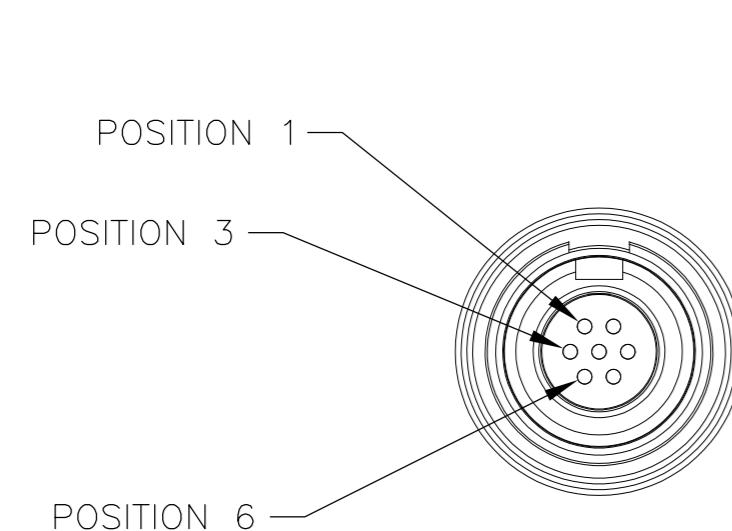
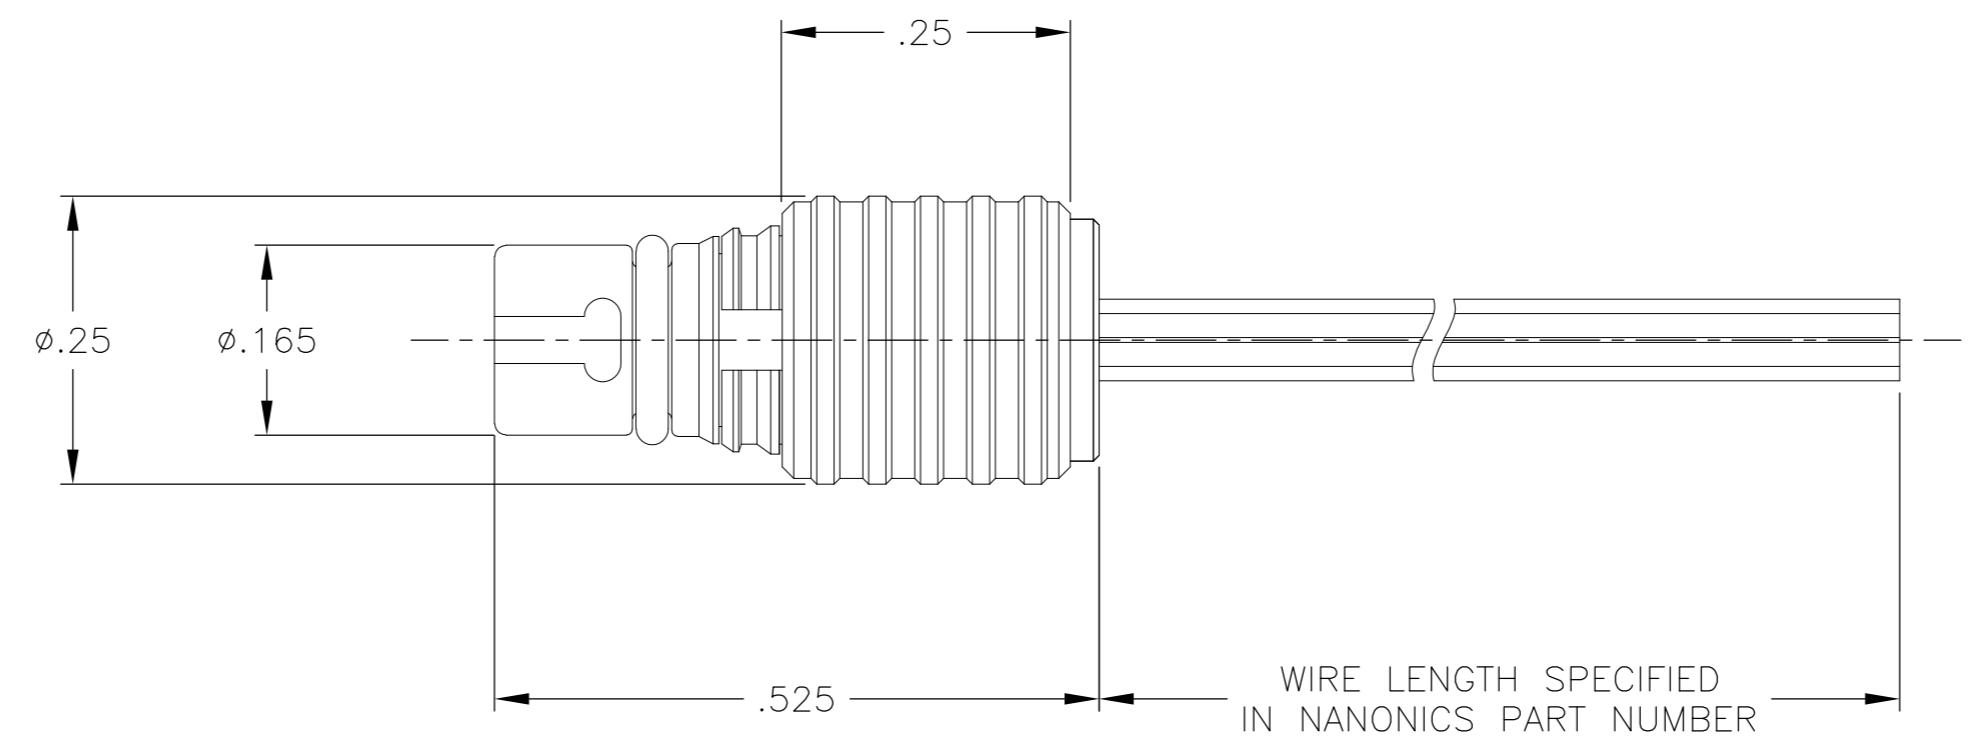


THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 - - -
 © COPYRIGHT - By -
 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				APVD
		P	LTR	DESCRIPTION	DATE	
	G	UPDATE PER ECO-11-013056			23 JUN 11	CAS MKS

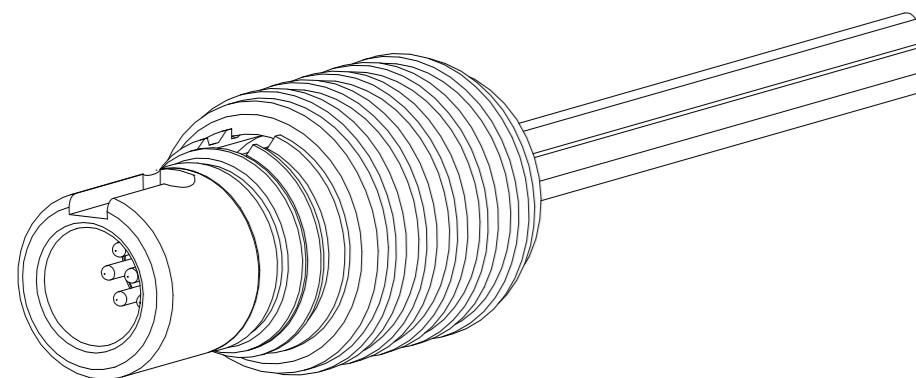

1 CONNECTOR BODY AND COUPLING SLEEVE MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
 LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
 INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
 O-RING MATERIAL: FLUOROSILICONE

2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER

3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

4 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0023

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
INCHES	
0 PLC	\pm -
1 PLC	\pm -
2 PLC	\pm .010
3 PLC	\pm .005
4 PLC	\pm -
ANGLES	\pm 1°
MATERIAL	FINISH
SEE NOTES	SEE NOTES

TE TE Connectivity
 PLUG ASSEMBLY,
 CIRCULAR, QUICK DISCONNECT,
 METAL, 7 POSITION
 SIZE CAGE CODE DRAWING NO. RESTRICTED TO
 A2 OJPN9 C-1589055
 CUSTOMER DRAWING
 SCALE 6:1 SHEET 1 OF 1 REV G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[QCM007PC2DC040](#)